




Telecommunication MODEM Transformer Transformers

DT42-7024T

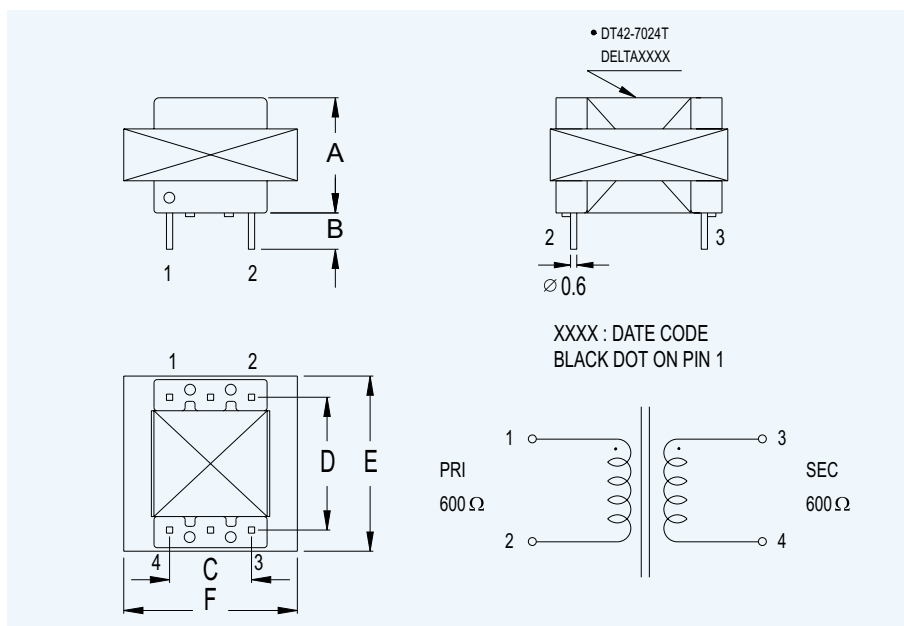

DIMENSIONS IN mm						
A	B	C	D	E	F	G
12.0 MAX.	4.0 $\pm$ 0.5	7.62 $\pm$ 0.15	12.5 $\pm$ 0.50	17.0 MAX.	17.0 MAX.	

ELECTRICAL CHARACTERISTICS	
URNS RATIO	1 : 1 $\pm$ 2% @1KHz, 1V
D.C. RESISTANCE	PRI: 55 Ω $\pm$ 10% SEC: 55 Ω $\pm$ 10%
FREQUENCY RESPONSE	$\pm$ 0.45 dB @300Hz ~ 3.5KHz
INSERTION LOSS	2.0 dB Max @1KHz, 0dBm
RETURN LOSS	20 dB Min. @300Hz ~ 3.5KHz
LONGITUDINAL BALANCE	60dB Min. @60Hz ~ 1KHz 46dB Min. @1KHz ~ 4KHz
DIELECTRIC STRENGTH	1250 VAC, 1 SEC @PRI TO SEC

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>