




Telecommunication PCMCIA Transformer Transformers

DT43-7035

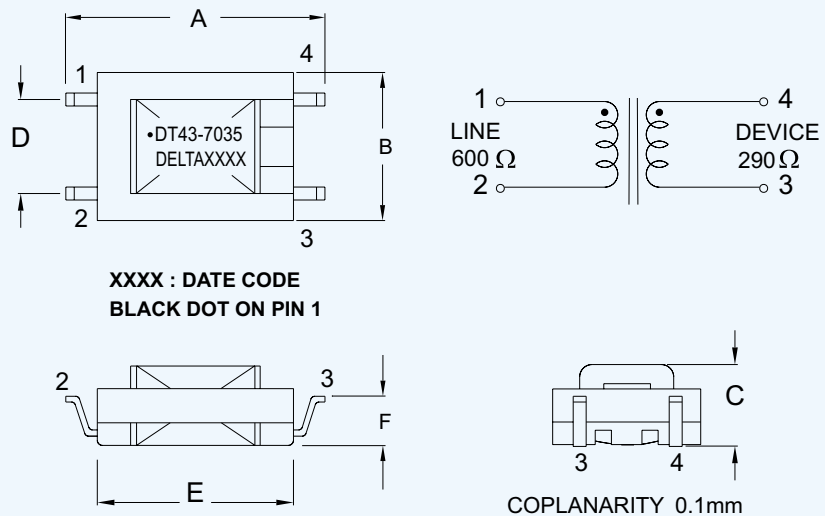

DIMENSIONS IN mm

A	B	C	D	E	F	G
18.2 REF.	8.4 MAX.	4.4 MAX.	5.08±0.1	15.0 MAX.	2.1±0.1	

ELECTRICAL CHARACTERISTICS	
URNS RATIO	1:1±1% @1KHz, 1V
INDUCTANCE	6.0H Min. @250Hz, 1V PARALLEL
IMPEDANCE	600 Ω ± 3% @1KHz, 1V
PHASE	±10 deg. @200Hz~4KHz
D.C. RESISTANCE	PRI: 141 Ω ± 10% SEC: 171 Ω ± 10%
INSERTION LOSS	3.3±0.2 dB @1KHz, 0 dBm
FREQUENCY RESPONSE	± 0.1 dB @200Hz~4KHz
RETURN LOSS	30 dB Min. @200Hz~4KHz
LONGITUDINAL BALANCE	60 dB Min. @200Hz~4KHz
TOTAL HARMONIC	-85 dB Max. @600Hz, -10 dBm
DIELECTRIC STRENGTH	1250 VAC @PRI TO SEC

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>