




Telecommunication

ISDN So-Interface

Transformers

DT21-8805AT

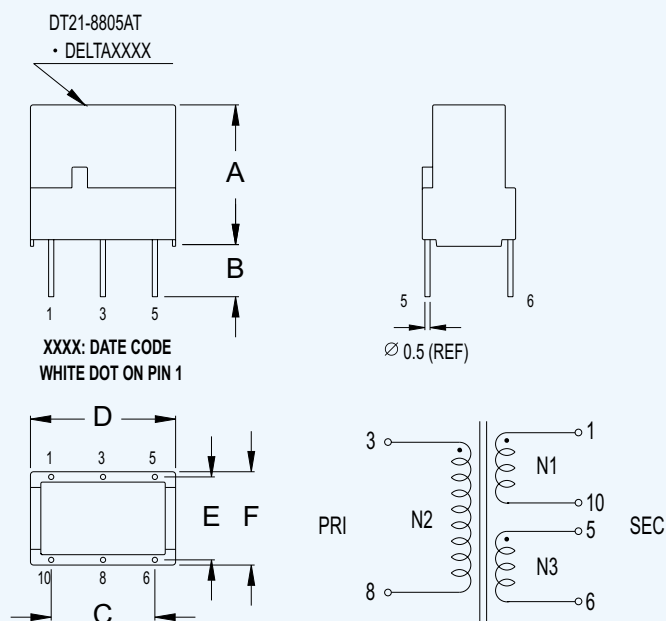

DIMENSIONS IN mm

A	B	C	D	E	F	G
15.0 MAX.	3.3±0.2	10.16±0.2	14.0±0.2	7.62±0.2	9.0±0.2	

ELECTRICAL CHARACTERISTICS

URNS RATIO	N2/N1: 4.0±2% @10KHz, 100mV N2/N3: 4.0±2% @10KHz, 100mV
INDUCTANCE	SEC: 30.0mH Min. @10KHz, 100mV
D.C. RESISTANCE	N1: 0.6Ω Max. N2: 4.0Ω Max. N3: 0.6Ω Max.
INTERWINDING CAPACITANCE	30pF TYP @10KHz, 100mV
COUPLING CAPACITANCE	N2 TO N1: 45pF Max. N2 TO N3: 45pF Max.
LEAKAGE INDUCTANCE	SEC: 3uH Max. @100KHz, 100mV
DIELECTRIC STRENGTH	1200 VAC, 2 SEC @PRI TO SEC 500 VAC, 2 SEC @WDG TO WDG
IMPEDANCE TEST	N1: 625 Min. @20KHz, 0.1V IDC=3mA N3: 625 Min. @20KHz, 0.1V IDC=3mA

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>