




Telecommunication ISDN U Transformer Transformers

DT22-1301

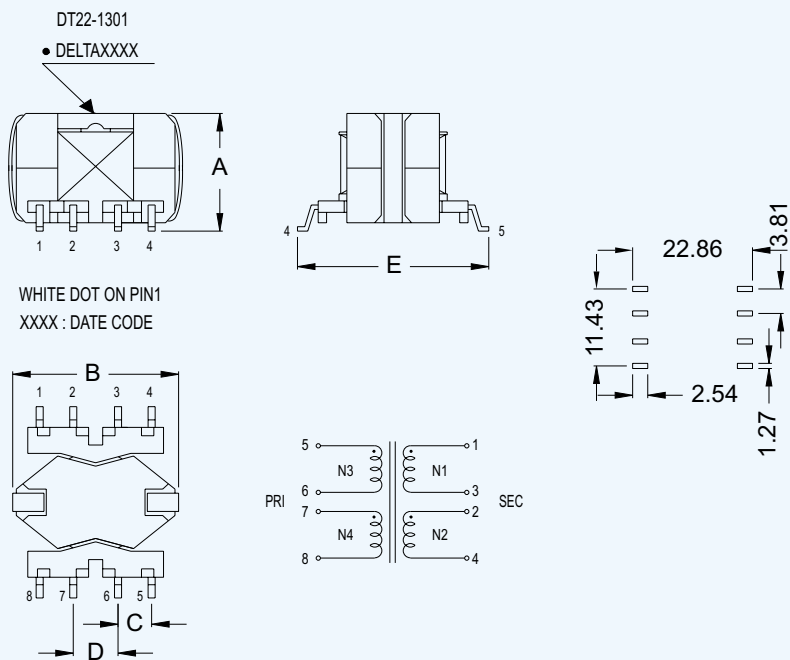

DIMENSIONS IN mm

A	B	C	D	E	F	G
12.8 MAX.	20 MAX.	3.81±0.1.	5.08±0.2	22.5 MAX.		

ELECTRICAL CHARACTERISTICS

URNS RATIO (PRI:SEC)	1:1.6 ± 2% @10KHz, 1V
INDUCTANCE	PRI: 13.3 mH ±10% @10KHz, 1V I _{dc} =60mA
LEAKAGE INDUCTANCE	SEC: 45 uH Max. @10KHz, 1V
D.C. RESISTANCE	PRI: 5.0 Ω Max. SEC: 5.0 Ω Max.
INTERWINDING CAPACITANCE	70 pF Max. @100KHz, 1V
DIELECTRIC STRENGTH	2000 VAC, 2 SEC @PRI TO SEC 2000 VAC, 2 SEC @WDG TO CORE

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>