




# Telecommunication ISDN U Transformer Transformers

## DT22-1501

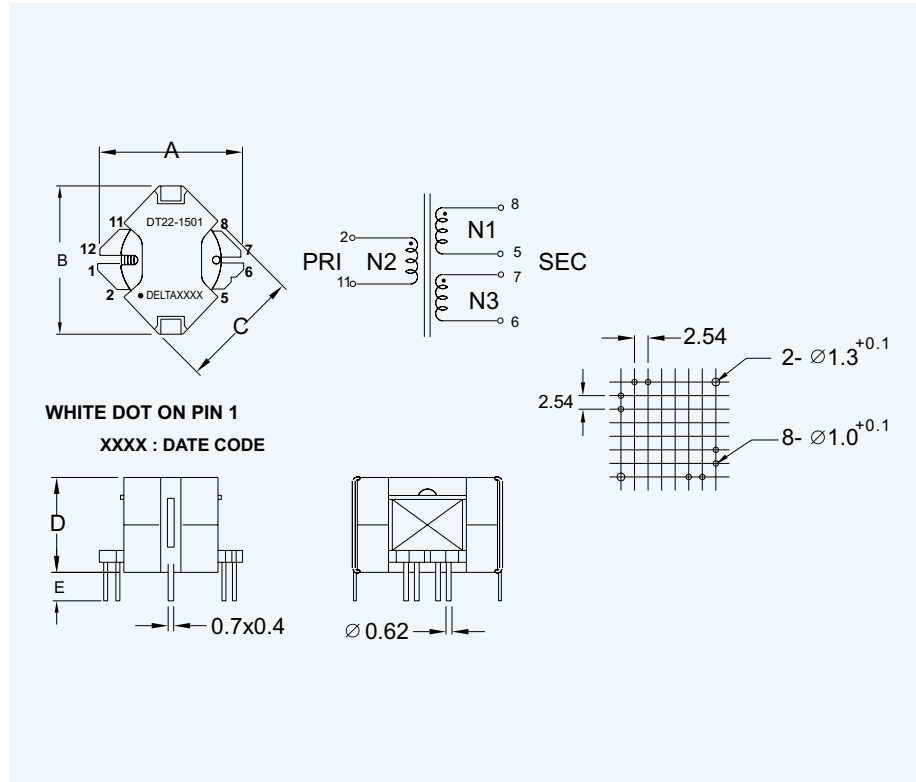

DIMENSIONS IN mm						
A	B	C	D	E	F	G
25.0 MAX.	26.0 MAX.	20.0 MAX.	17.5 MAX.	3.3 ± 0.5		
ELECTRICAL CHARACTERISTICS						
TURNS RATIO (N1:N3)			1.0 ± 2% @10KHz, 100mV			
(N3:N2)			0.8 ± 2% @10KHz, 100mV			
INDUCTANCE			SEC: 14.5 ± 10% mH @10KHz, 100mV			
			SEC: 14.5 ± 10% mH @10KHz, 100mV, IDC 60mA			
LEAKAGE INDUCTANCE			N1: 90 uH Max. @100KHz, 100mV			
CAPACITANCE (PRI:SEC)			90 pF Max. @10KHz, 100mV			
D.C. RESISTANCE			N1: 2.7 Ω Typ.			
			N2: 2.8 Ω Typ.			
			N3: 2.7 Ω Typ.			
DIELECTRIC STRENGTH			2000 VAC, 60 Hz, 2 SEC @PRI TO SEC			
			500 VAC, 60 Hz, 2 SEC @N1 TO N3			
			2000VAC, 60Hz, 2 SEC @WDG TO CORE			

**DELTA ELECTRONICS, INC.**

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

http://www.deltaww.com