




Telecommunication

ISDN U_{KO} Transformer

Transformers

DT23-1303

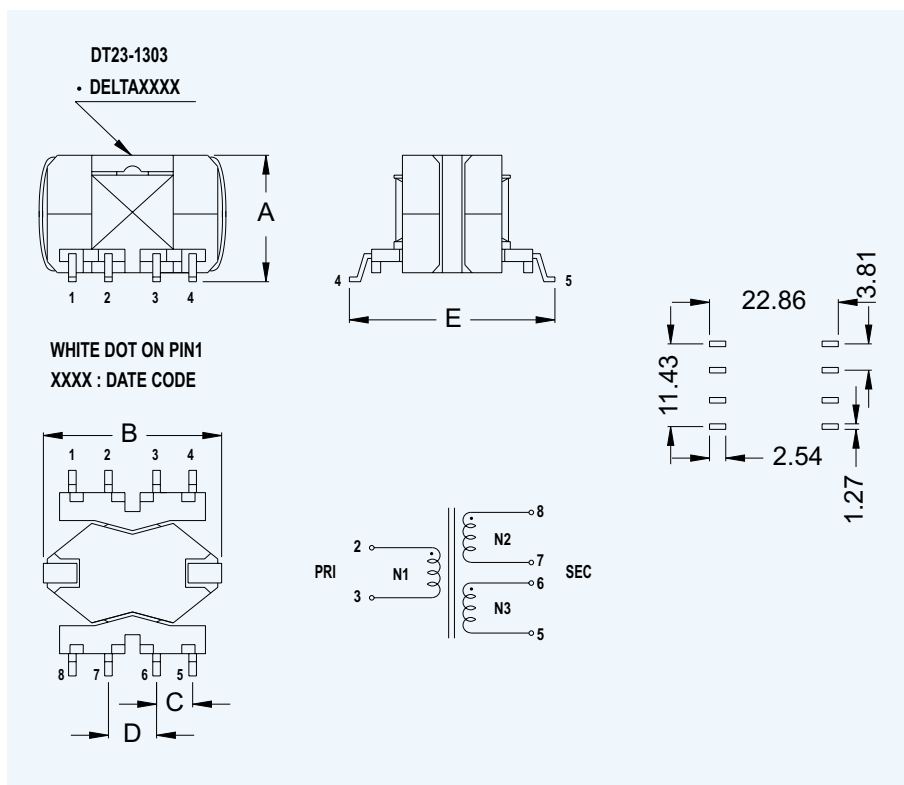

DIMENSIONS IN mm

A	B	C	D	E	F	
12.8 MAX.	20 MAX.	3.81±0.1	5.08±0.2	22.5 MAX.		

ELECTRICAL CHARACTERISTICS

URNS RATIO (N1:N2:N3)	1 : 0.8 : 0.8 ±2% @10KHz, 1V
INDUCTANCE	SEC: 13.2 mH ±10% @10KHz, 0.1V I _{dc} =60mA
LEAKAGE INDUCTANCE	SEC: 60 uH Max. @100KHz, I _{dc} =10mA
D.C. RESISTANCE	N1: 4.9 Ω Max. N2: 2.6 Ω Max. N3: 3.5 Ω Max.
INTERWINDING CAPACITANCE	50 pF Max. @1KHz, 0.1V
DIELECTRIC STRENGTH	1000 VAC, 2 SEC @PRI TO SEC 1000 VAC, 2 SEC @WDG TO WDG 500 VAC, 2 SEC @N2 TO N3

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>