




Telecommunication ISDN T1 Transformer Transformers

DT24-8604

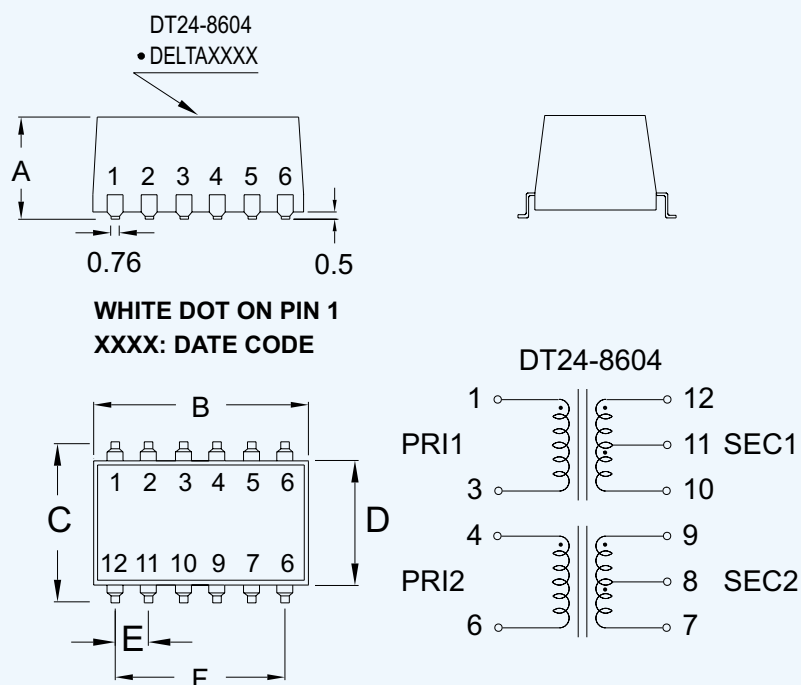

DIMENSIONS IN mm

A	B	C	D	E	F	G	H
8.64 MAX.	17.15 MAX.	15.24 MAX.	11.58 MAX.	2.54±0.1	12.7±0.3		

ELECTRICAL CHARACTERISTICS

TURNS RATIO (PRI 1 : SEC 1) (PRI 2 : SEC 2)	1 : 2 ±2% @100KHz, 0.2V 2 : 1 ±2% @100KHz, 0.2V
INDUCTANCE	PRI: 1.6 mH Min. @100KHz, 0.2V
LEAKAGE INDUCTANCE	PRI: 1.3 uH Max. @100KHz, 0.2V
D.C. RESISTANCE	PRI: 1.1 Ω Max. SEC 1: 1 Ω Max. SEC 2: 0.7 Ω Max.
INTERWINDING CAPACITANCE	PRI 1 TO SEC 1: 55 pH Max. @100KHz, 0.2V PRI 2 TO SEC 2: 40 pH Max. @100KHz, 0.2V
DIELECTRIC STRENGTH	1500 VAC, 2 SEC PRI TO SEC

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>