




Telecommunication ADSL Transformer Transformers

DT32-2201
DT32-2202

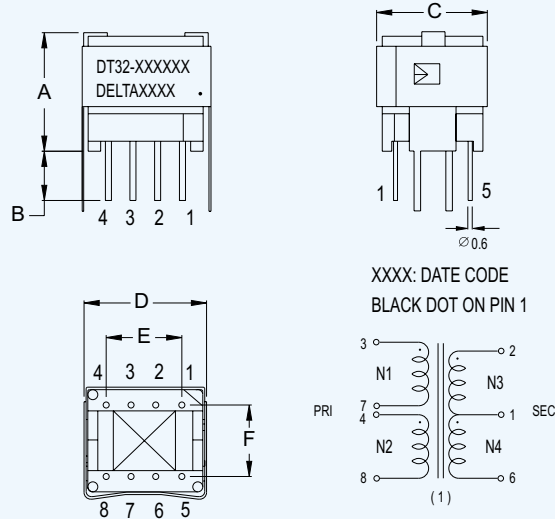

DIMENSIONS IN mm

A	B	C	D	E	F	G
12.5 MAX.	3.4 ±0.4	12.3 MAX.	14.0 MAX.	7.62 ±0.2	7.6 ±0.2	

ELECTRICAL CHARACTERISTICS		
	DT32-2201	DT32-2202
TR	(SEC : N1): 1.65:1 ±3% (N1:N3): 2.05:1 ±4% (N3:N4): 1.0:1 ±5% @300KHz 1V	(N2:N1): 1.125:1 ±2% (N4:N1): 1.125:1 ±2% (N3:N4): 2.0:1 ±1% @100KHz 1V
L	PRI: 7.68mH ±10% @100KHz 0.1V	PRI: 884 uH ±10% @100KHz 0.1V
LK	N1: 5uH Max. @300KHz 1V	-----
D.C.R	N1: 1.8 ΩMax. N2: 0.75 ΩMax. N3: 0.1 ΩMax. N4: 0.95 ΩMax.	N1: 1.90mΩ Max. N2: 100mΩ Max. N3: 200mΩ Max. N4: 200mΩ Max.
HI-POT	500 VAC 60Hz 2 SEC @PRI TO SEC	500 VAC 60Hz 2 SEC @PRI TO SEC
Schematic	1	1

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

http://www.deltaww.com