

**DL-7032-001****Infrared Laser Diode****Features**



- Lasing wavelength : 830 nm (Typ.)
- High output power : 100 mW at 50°C
- Package :  $\phi$  9.0 mm

**Applications**

- Measurement equipments

**Absolute Maximum Ratings at Tc=25°C**

Parameter		Symbol	Ratings	Unit
Light Output	CW	Po	100	mW
Reverse Voltage	Laser	VR	2	V
	PIN		15	
Operating Temperature		Topr	-10 to +50	°C
Storage Temperature		Tstg	-40 to +85	°C

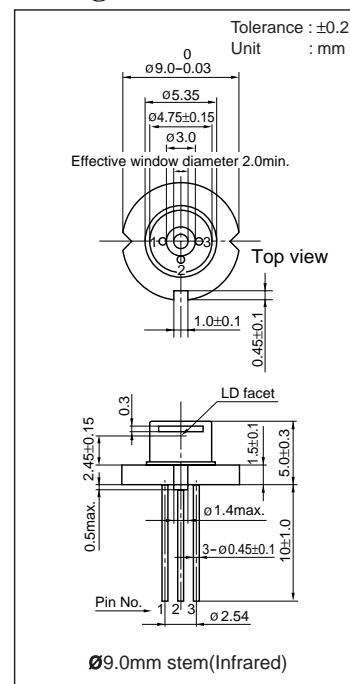**Package Dimensions****Pin Connection****Electrical and Optical Characteristics 1) at Tc=25°C**

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current		Ith	CW	-	50	70	mA
Operating Current		Iop	Po=100mW	-	140	180	mA
Operating Voltage		Vop	Po=100mW	-	1.85	2.3	V
Lasing Wavelength		$\lambda_p$	Po=100mW	810	830	840	nm
Beam 2) Divergence	Perpendicular	$\theta \perp$	Po=100mW	12	18	25	°
	Parallel	$\theta //$	Po=100mW	5	7	11	°
Off Axis Angle	Perpendicular	$\Delta \theta \perp$	Po=100mW	-	-	±3	°
	Parallel	$\Delta \theta //$	Po=100mW	-	-	±3	°
Differential Efficiency		dPo/dIop	-	0.5	1.0	-	mW/mA
Monitoring Output Current		Im	Po=100mW	0.05	0.2	0.5	mA
Astigmatism		As	Po=100mW	-	10	-	μm

1) Initial values 2) Full angle at half maximum


Note : The above product specification are subject to change without notice.

**SANYO Electric Co.,Ltd. Semiconductor Company**


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

## Characteristics


### Output power vs. Forward current

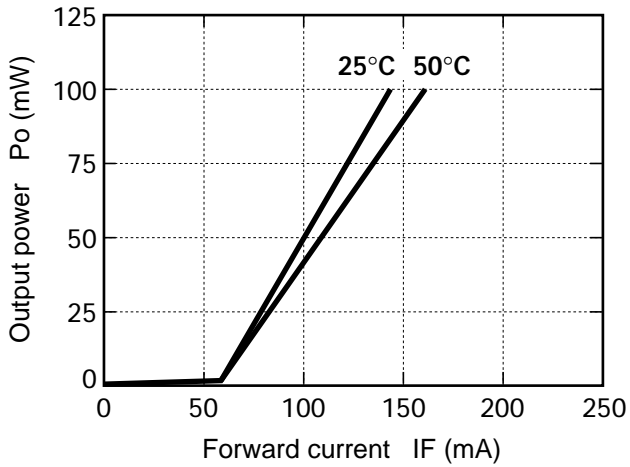


### Threshold current vs. Temperature

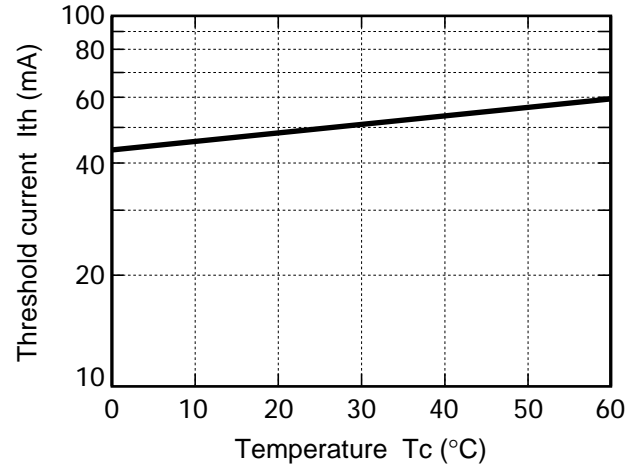


### Monitoring current vs. Output power

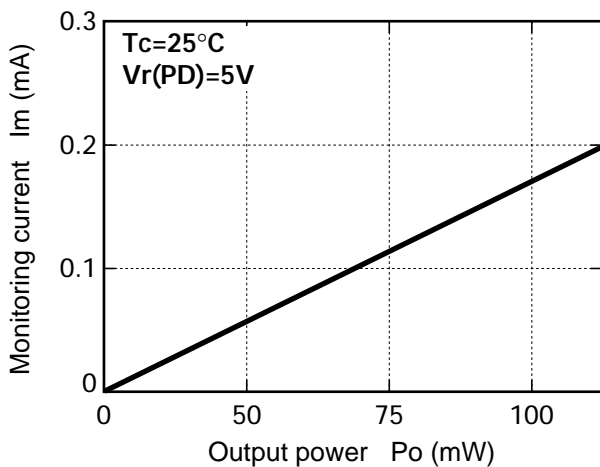


### Beam divergence

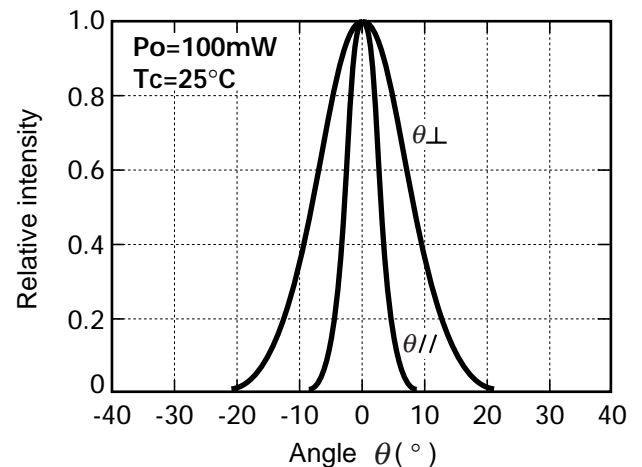

### Lasing wavelength vs. Temperature

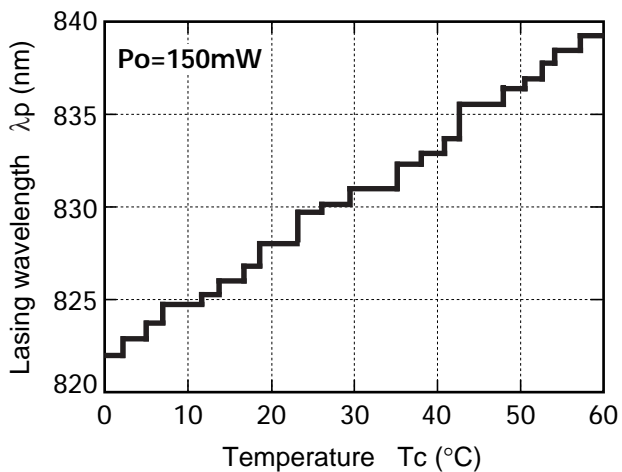

### Lasing wavelength vs. Output power

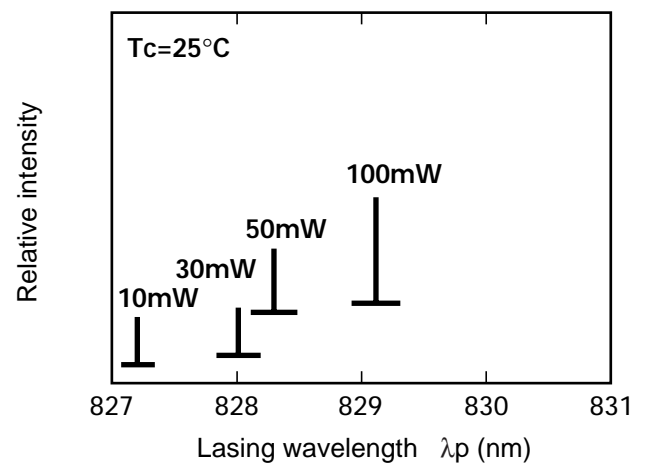

## CAUTION

1. No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster / crime-prevention equipment or the like, and the failure of which may directly or indirectly cause injury, death or property loss.
2. Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - 1) Accept full responsibility and indemnify and defend SANYO ELECTRIC CO.,LTD., it's affiliates, subsidiaries and distributors or any of their officers and employees, jointly and severally, against any and all claims and litigation and all damages, costs and expenses associated with such use.
  - 2) Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., it's affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
3. Information (including circuit diagrams and circuit parameters) disclosed herein is for example only; it is not guaranteed for mass production, SANYO believes the information disclosed herein is accurate and reliable, but no guarantees are made or implied regarding it's use or any infringements of intellectual property rights or other rights of third parties.

## Precautionary instructions in handling gallium arsenic products

Special precautions must be taken in handling this product because it contains, gallium arsenic, which is designated as a toxic substance by law. Be sure to adhere strictly to all applicable laws and regulations enacted for this substance, particularly when it comes to disposal.

Manufactured by ; **Tottori SANYO Electric Co., Ltd.**  
LED Business Unit  
5-318, Tachikawa-cho, Tottori City, 680-8634 Japan  
TEL: +81-857-21-2137 FAX: +81-857-21-2161