

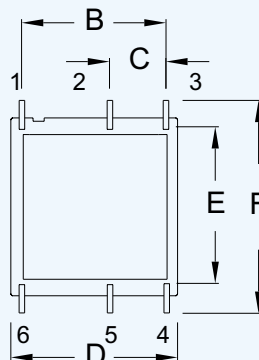





# Telecommunication ISDN S Transformer Transformers

DT21-8708

DT21-8708  
•DELTA XXXX



WHITE DOT ON PIN 1  
XXXX: DATE CODE

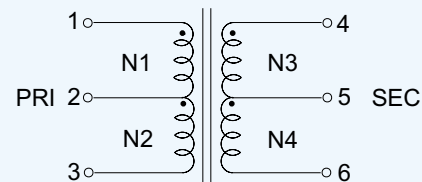

DIMENSIONS IN mm

| A         | B       | C        | D         | E         | F         | G |
|-----------|---------|----------|-----------|-----------|-----------|---|
| 13.0 MAX. | 7.5±0.2 | 12.5±0.2 | 17.0 MAX. | 15.0 MAX. | 15.0 MAX. |   |

## ELECTRICAL CHARACTERISTICS

|                          |                                    |
|--------------------------|------------------------------------|
| URNS RATIO (PRI:SEC)     | 2:1±5% @10KHz, 0.1V                |
| INDUCTANCE               | SEC: 25 mH Min. @10KHz, 0.1V       |
| LEAKAGE INDUCTANCE       | SEC: 30 uH Max. @100KHz, 0.1V      |
| D.C. RESISTANCE          | PRI: 3.8 Ω Max.<br>SEC: 3.8 Ω Max. |
| INTERWINDING CAPACITANCE | 150 pF Max. @100KHz, 0.1V          |
| DIELECTRIC STRENGTH      | 4000 VAC, 2 SEC @PRI TO SEC        |

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>