


DPF1000

DPF 1000

1 2



1 Series name
2 Output wattage

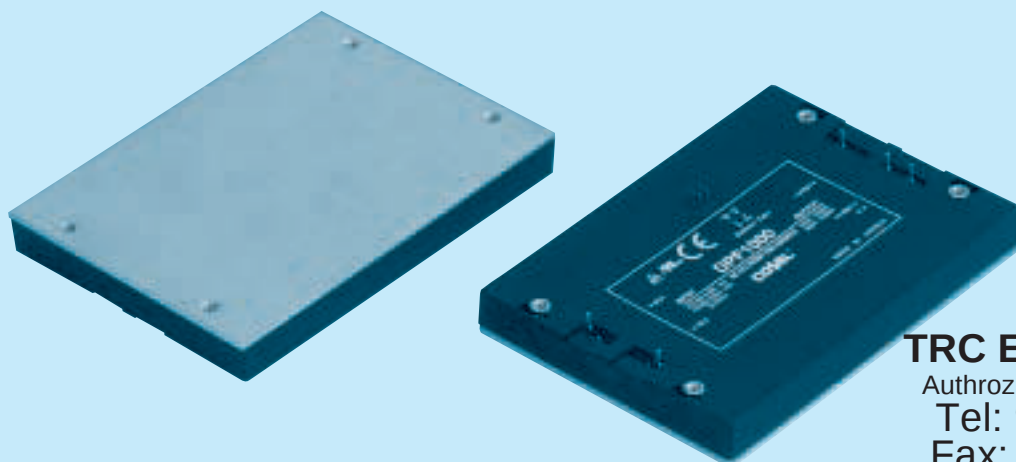**TRC Electronics, Inc.**

Authorized Stocking Distributor

Tel: 973.779.8282

Fax: 973.779.1490

Contact TRC for pricing,
stock, and technical assistance.www.trcelectronics.com

MODEL	DPF1000	
AC INPUT[V]	AC85 - 264	AC170 - 264
MAX OUTPUT WATTAGE[W]	1,000	1,500
DC OUTPUT VOLTAGE[V]	DC360	

SPECIFICATIONS

	MODEL	DPF1000	
INPUT	VOLTAGE[V]	AC85 - 264 1 f	AC170 - 264 1 f
	POWER FACTOR CORRECTION RANGE[V]	AC85 - 255 1 f	
	CURRENT[A]	11.5typ (ACIN 100V)	8.5typ (ACIN 200V)
	FREQUENCY[Hz]	50/60 (47 - 63)	
	INRUSH CURRENT[A]	Limited by external resistance	
	EFFICIENCY[%]	90typ (ACIN 100V)	95typ (ACIN 200V)
	POWER FACTOR	0.98typ (ACIN 100V)	0.95typ (ACIN 200V)
	LEAKAGE CURRENT[ma]	0.75max (60Hz, According to IEC60950 and DEN-AN)	
OUTPUT	WATTAGE[W]	1,000	1,500
	VOLTAGE[V]	DC360	
	VOLTAGE ACCURACY[V]	± 20	
PROTECTION CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION[V]	DC400 - 450 The power factor corrector function stops	
	IOG	Inverter operation monitoring, Open-collector output, Maximum sink current 10mA, Maximum allowance voltage 35V	
	ENA	Enable signal, Open-collector output, Maximum sink current 10mA, Maximum allowance voltage 35V	
	AUX	Auxiliary power supply for external signal, Output voltage:6.5 - 8.5V maximum, Output current:10mA	
	OTHERS	Parallel operation possible (Current balancing function), N+1 redundant operation possible, Thermal protection	
ISOLATION	INPUT-OUTPUT	Non isolated	
	INPUT, OUTPUT-FG	AC3,000V 1minute Cutoff current = 10mA, DC500V, 50MWmin (20 ± 15 C)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-20 to +85 C (Aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +85 C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
SAFETY	AGENCY APPROVALS	UL1950, C-UL, EN60950, EN50178 Complies with DEN-AN and IEC60950	
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2	
OTHERS	CASE SIZE/WEIGHT	118.6 × 12.7 × 85mm (W × H × D) /200g max	
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)	



*1 Refer to Input voltage derating.

*2 When the input voltage is more than 255V, the power factor corrector function stops, and the output voltage becomes 0.

*3 The value included the output setting and the line regulation. However, the input voltage is in the power factor correction

range.


External view

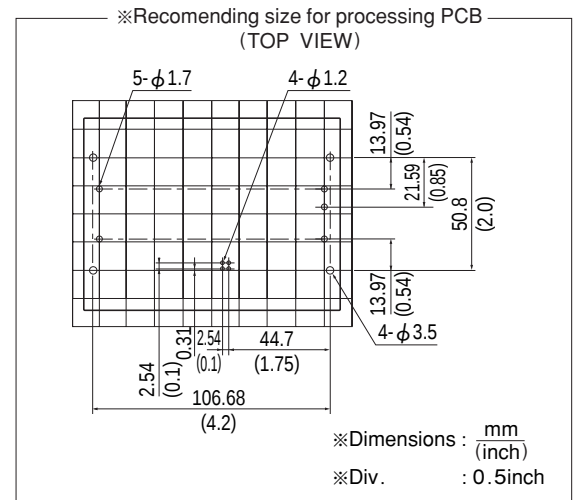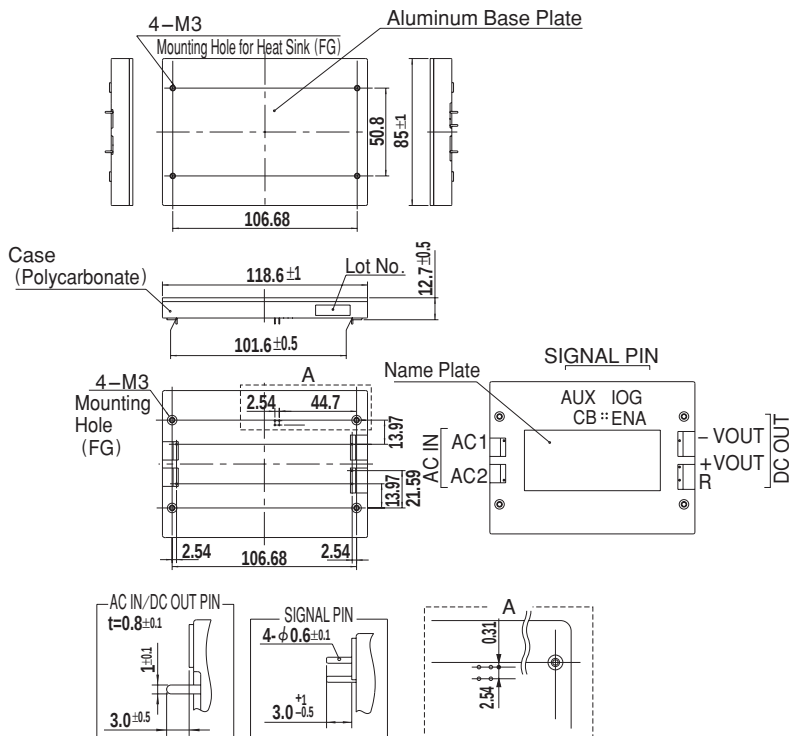


- ※Weight: 200g or less.
- ※Tolerance: ±0.3
- ※Case: PBT
- ※Base Plate: Aluminum
- ※Mounting torque
- Mounting hole screwing torque 0.4N·m (5.0kgf·cm) max

Performance data


■ STATIC CHARACTERISTICS

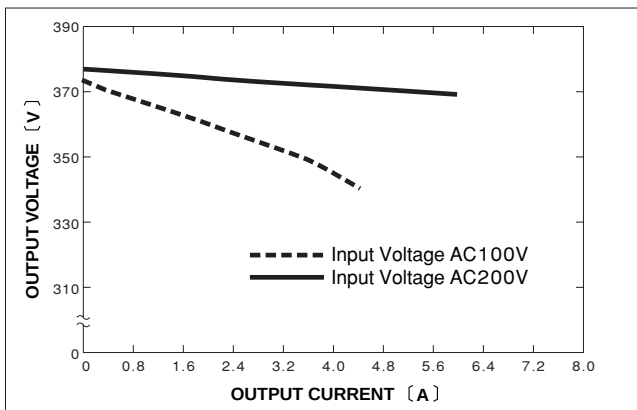

■ OUTPUT VOLTAGE FOR INPUT

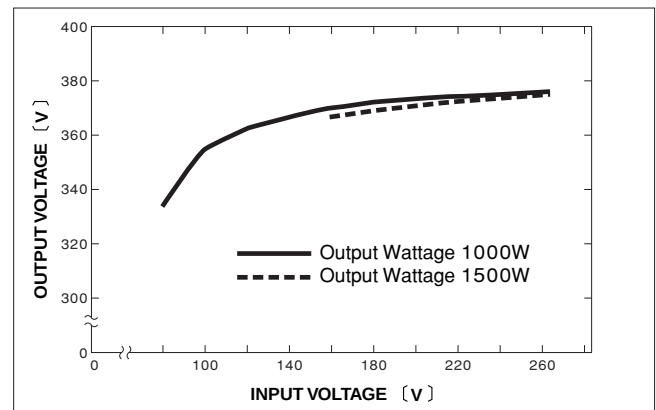

■ HARMONIC CURRENT (AC100V)

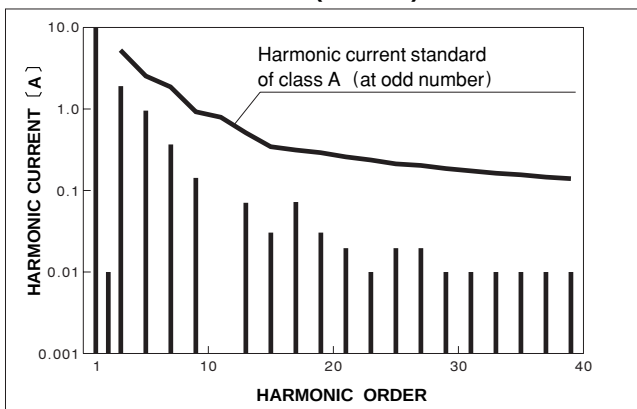

■ HARMONIC CURRENT (AC230V)

