

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

DE10SC3L

30V 10A

FEATURES

- SMT
 - $T_j = 150^\circ\text{C}$
 - Low $V_F = 0.45\text{V}$
 - P_{RRSM} avalanche guaranteed
 - High current capacity with Small Package


APPLICATION

- Switching power supply
 - DC/DC converter
 - Home Appliances, Office Equipment
 - Telecommunication

OUTLINE DIMENSIONS

Case : E-pack

Unit: mm

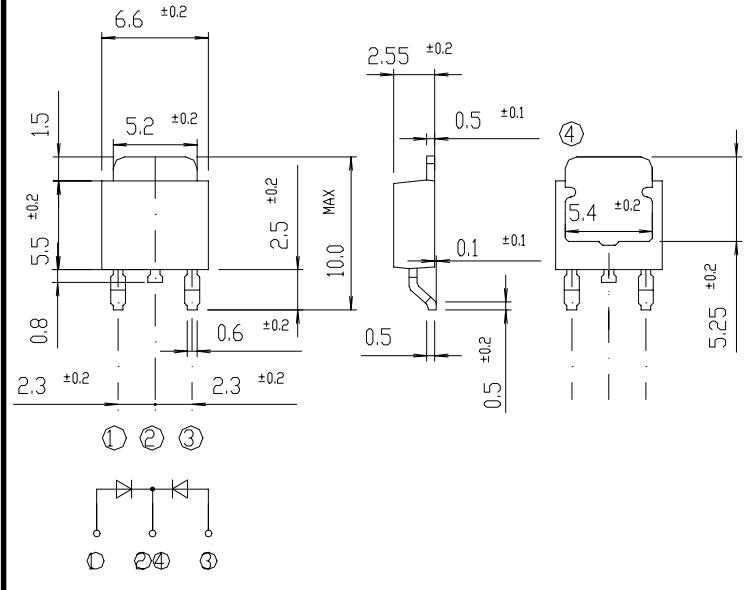

RATINGS


● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{STG}		-55~150	°C
Operating Junction Temperature	T _J		150	°C
Maximum Reverse Voltage	V _{RM}		30	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	35	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Rating for each diode I _O /2, T _C =124°C	10	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _J =25°C	100	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μs, Rating of per diode, T _J =25°C	330	W


● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=4A$, Pulse measurement, Rating of per diode	Max.0.45	V
Reverse Current	I_R	$V_R=VRM$, Pulse measurement, Rating of per diode	Max.5.0	mA
Junction Capacitance	C_J	$f=1MHz$, $V_R=10V$, Rating of per diode	Typ.290	pF
Thermal Resistance	θ_{JC}	junction to case	Max.4.0	°C/W


DE10SC3L Forward Voltage

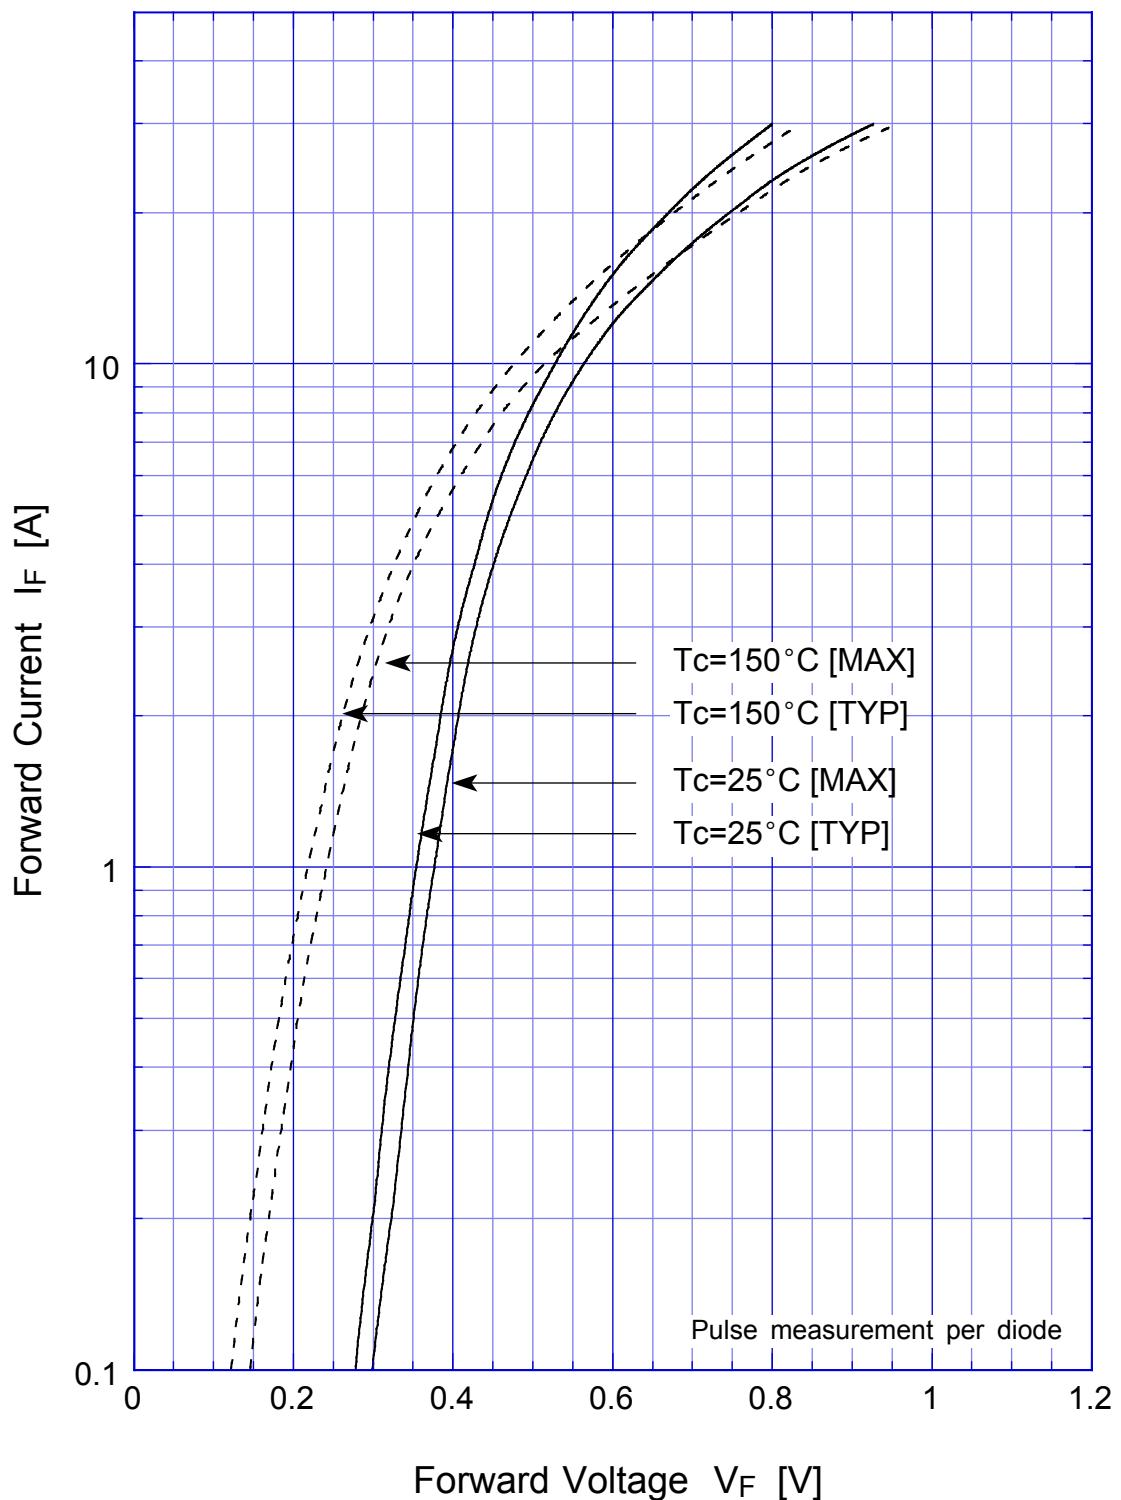



DE10SC3L Junction Capacitance

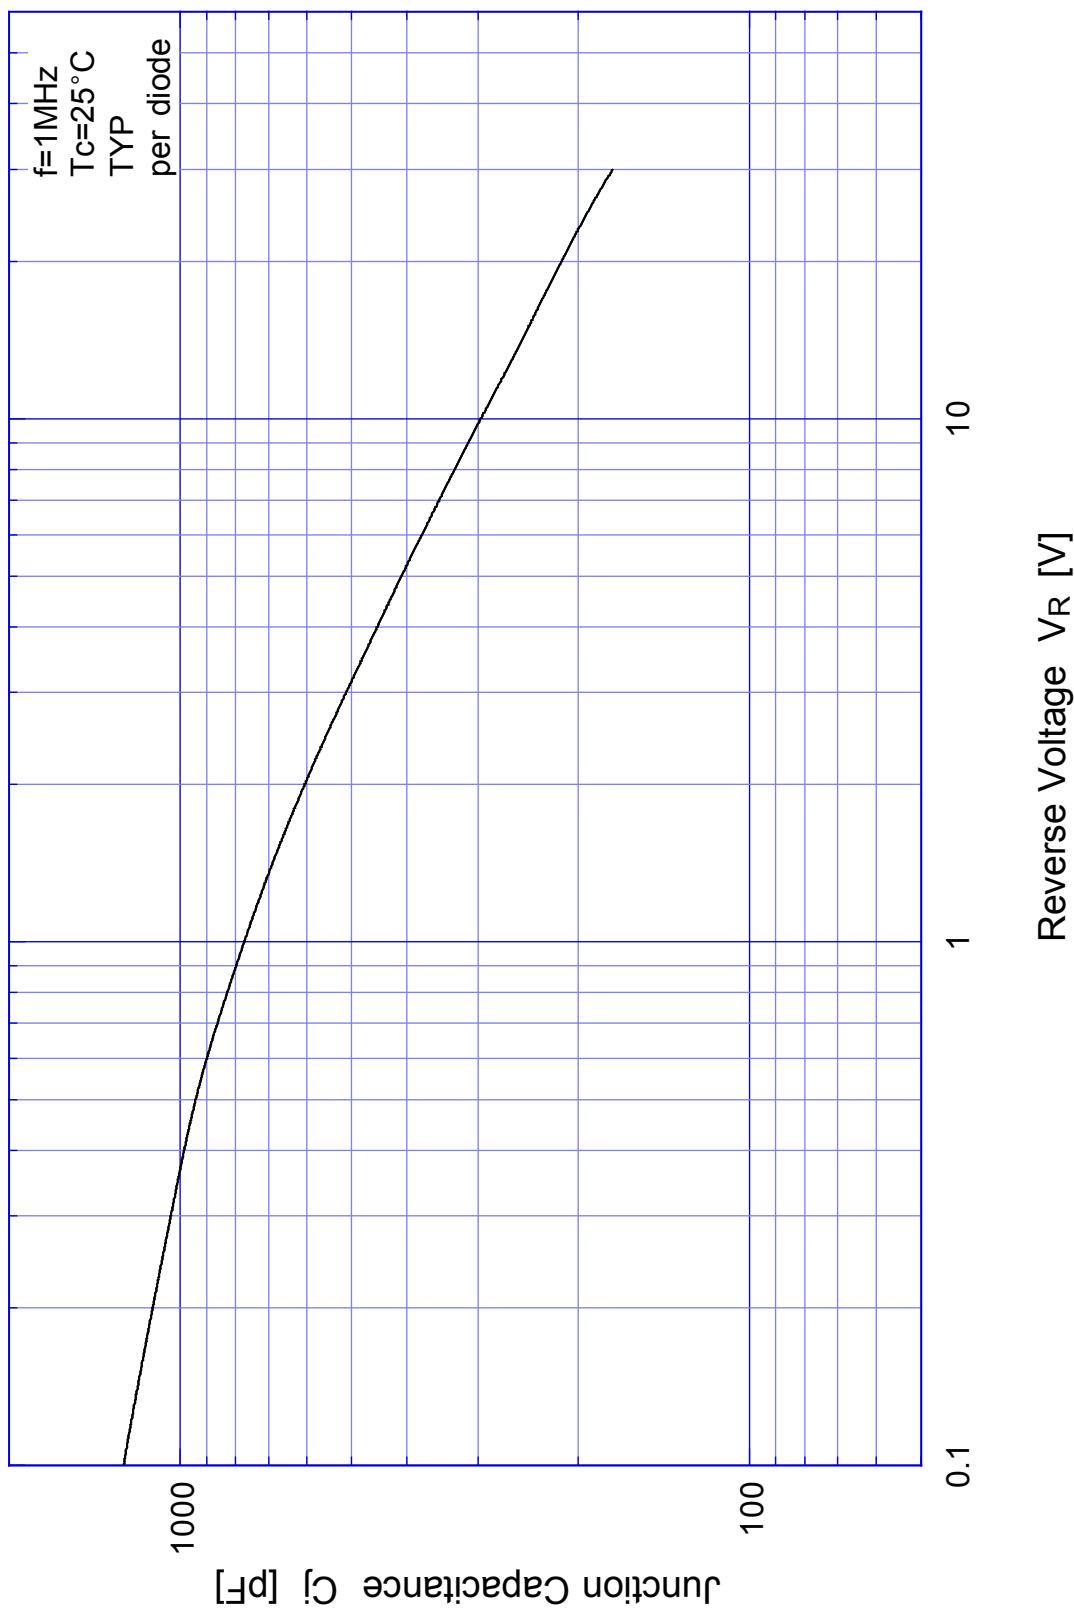



DE10SC3L Reverse Current


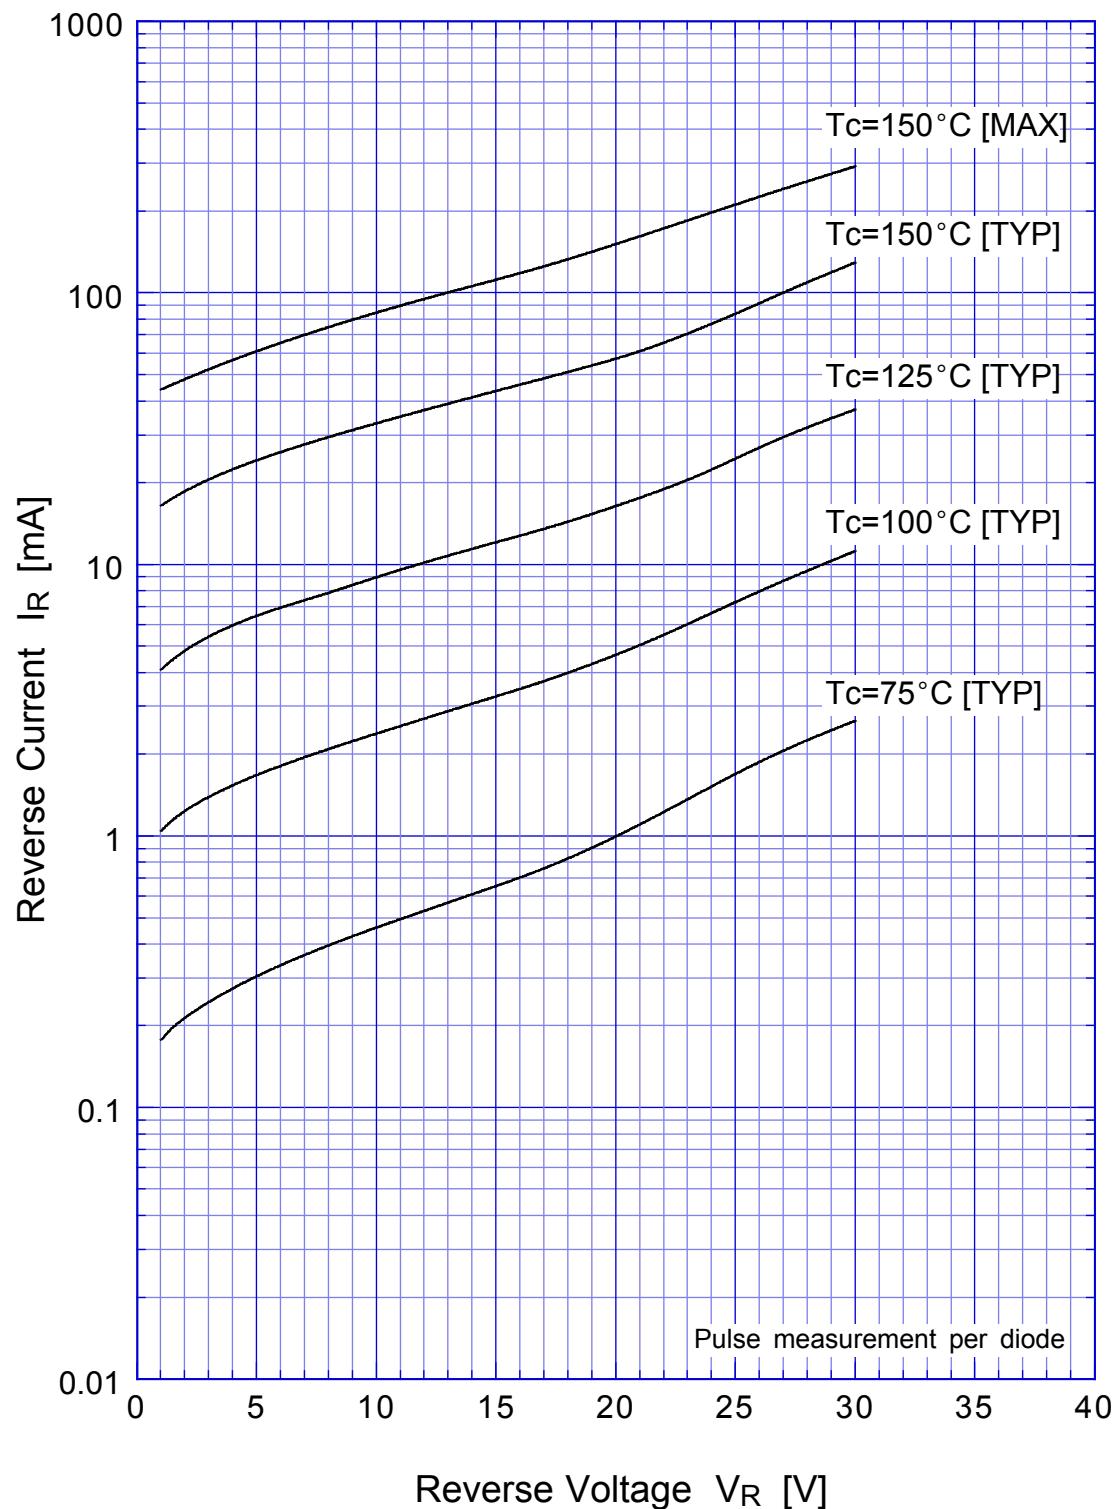


DE10SC3L Reverse Power Dissipation

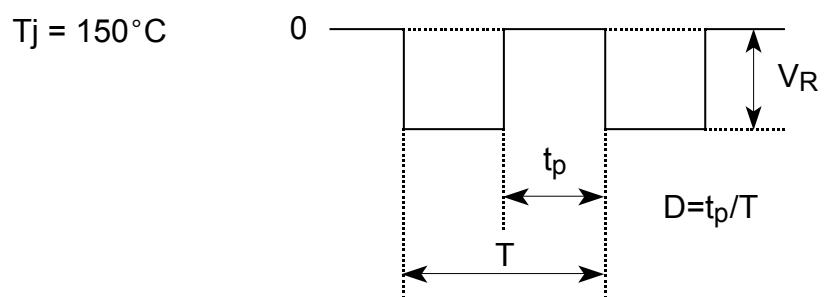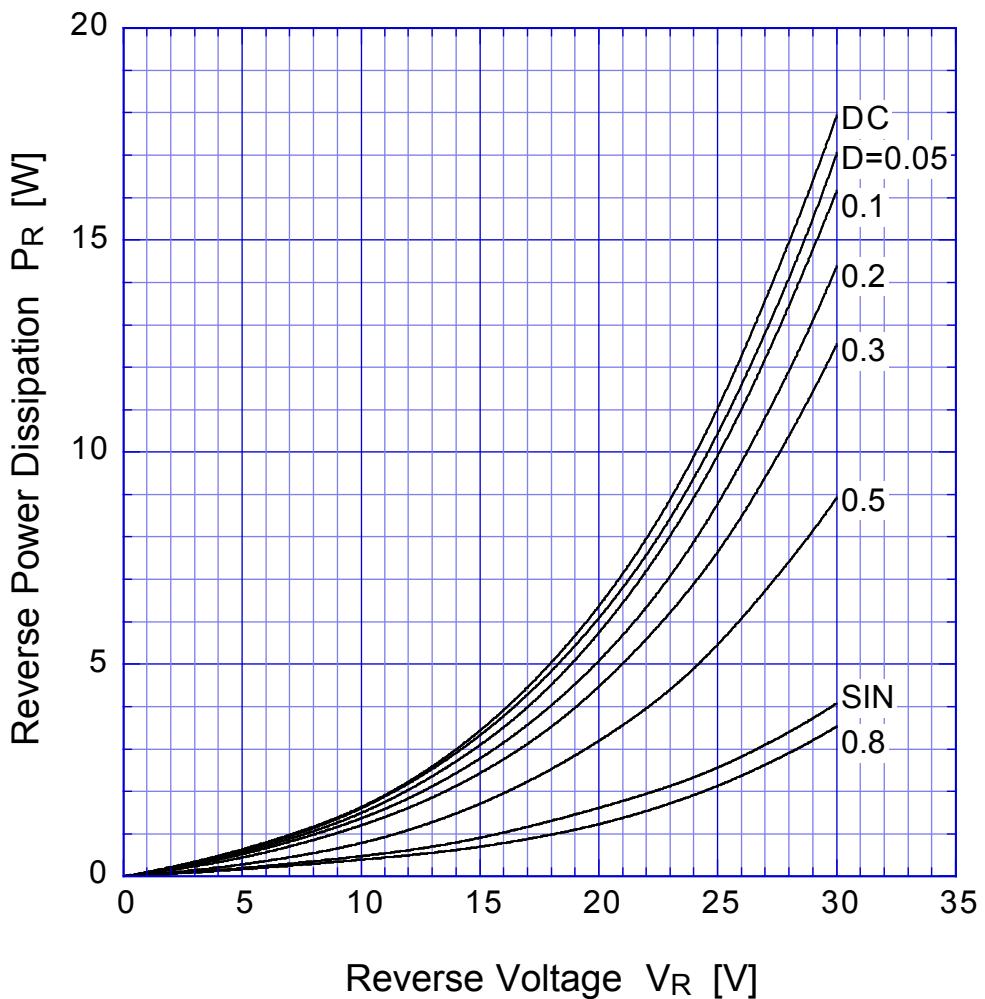


DE10SC3L Forward Power Dissipation

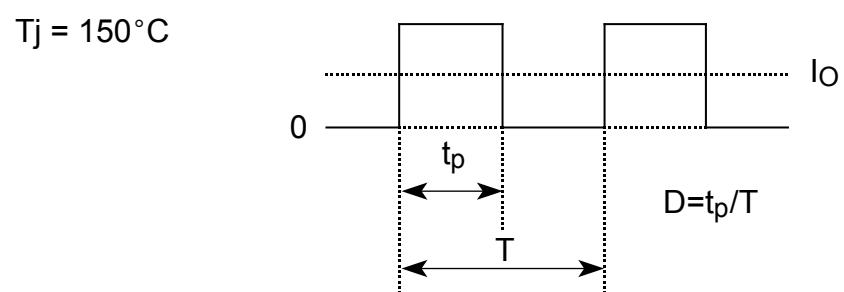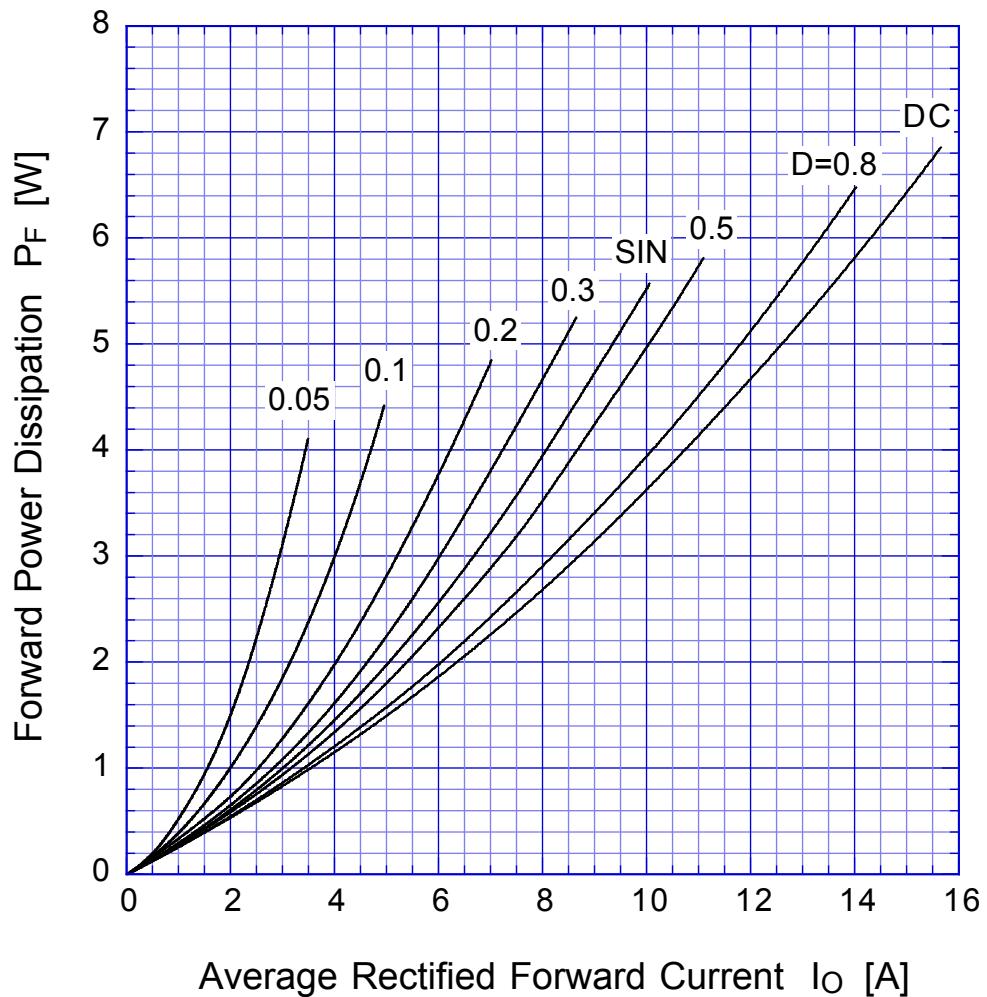


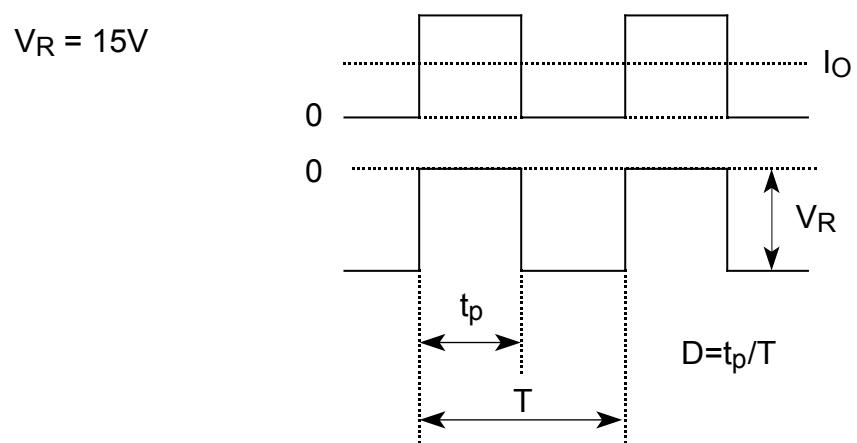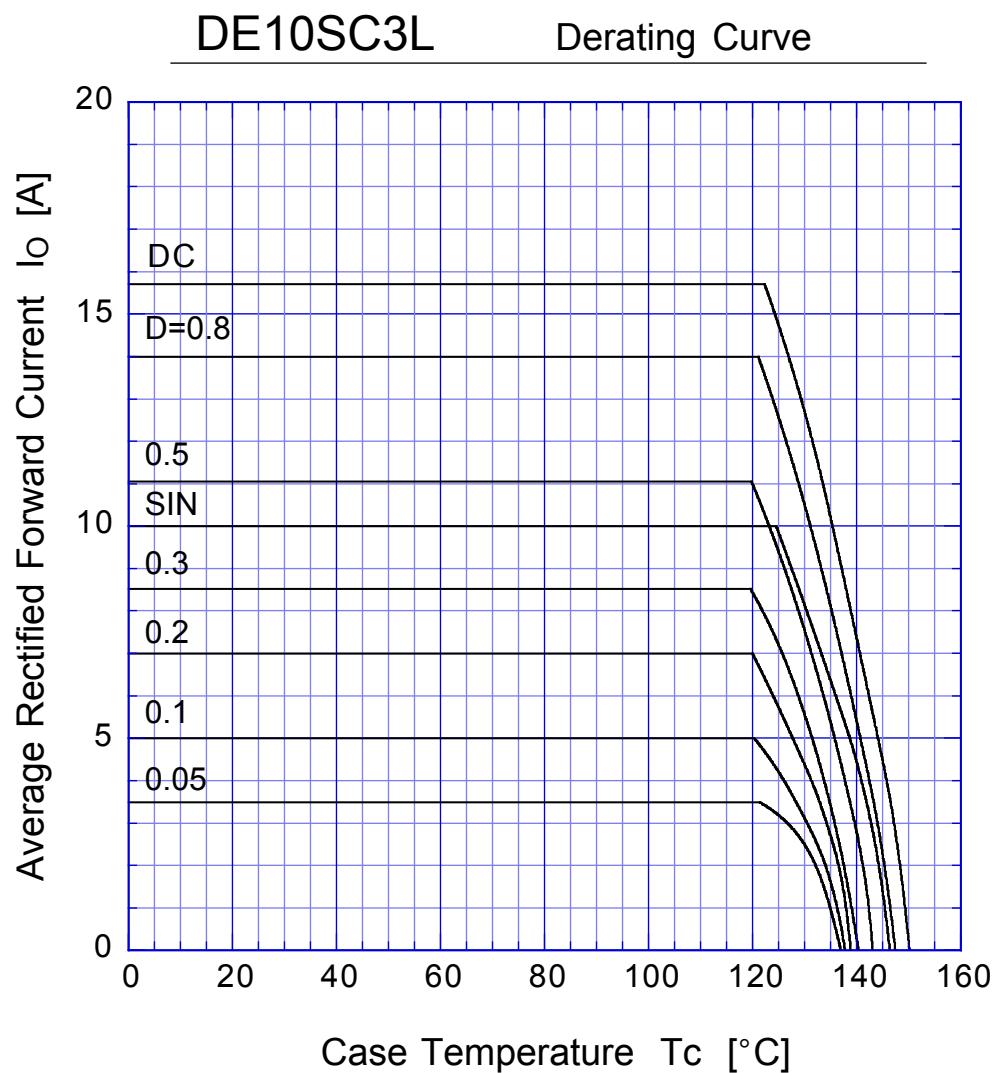

DE10SC3L Peak Surge Forward Capability

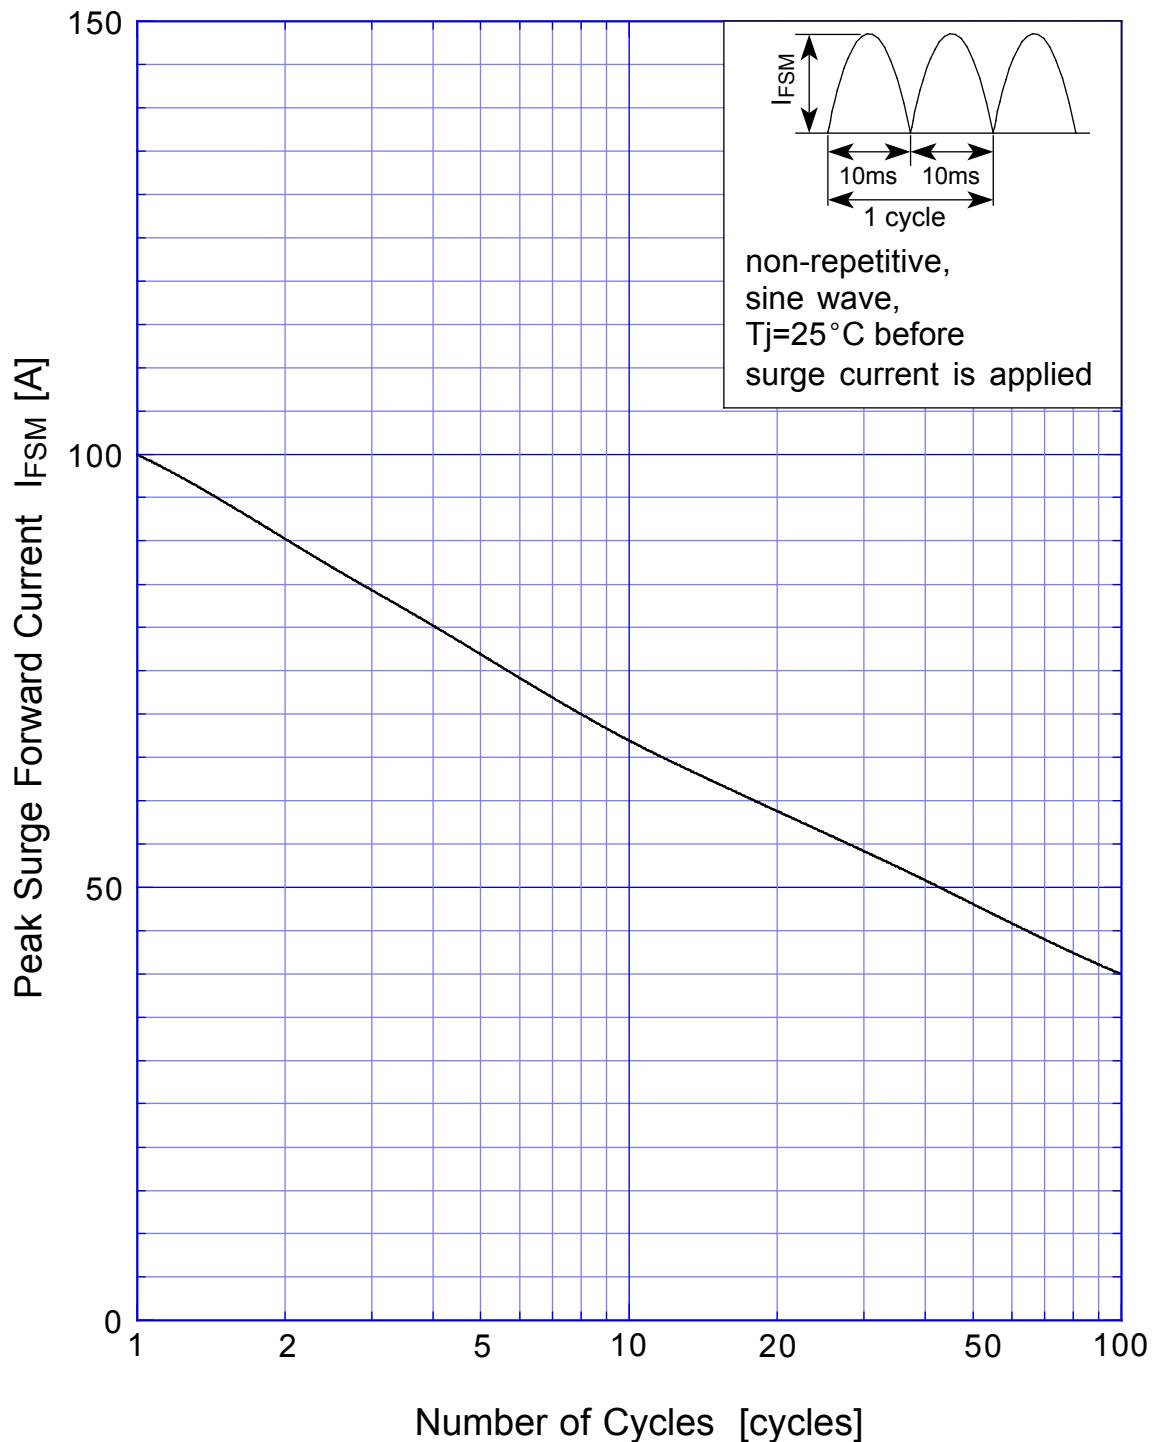

SBD Repetitive Surge Reverse Power Derating Curve

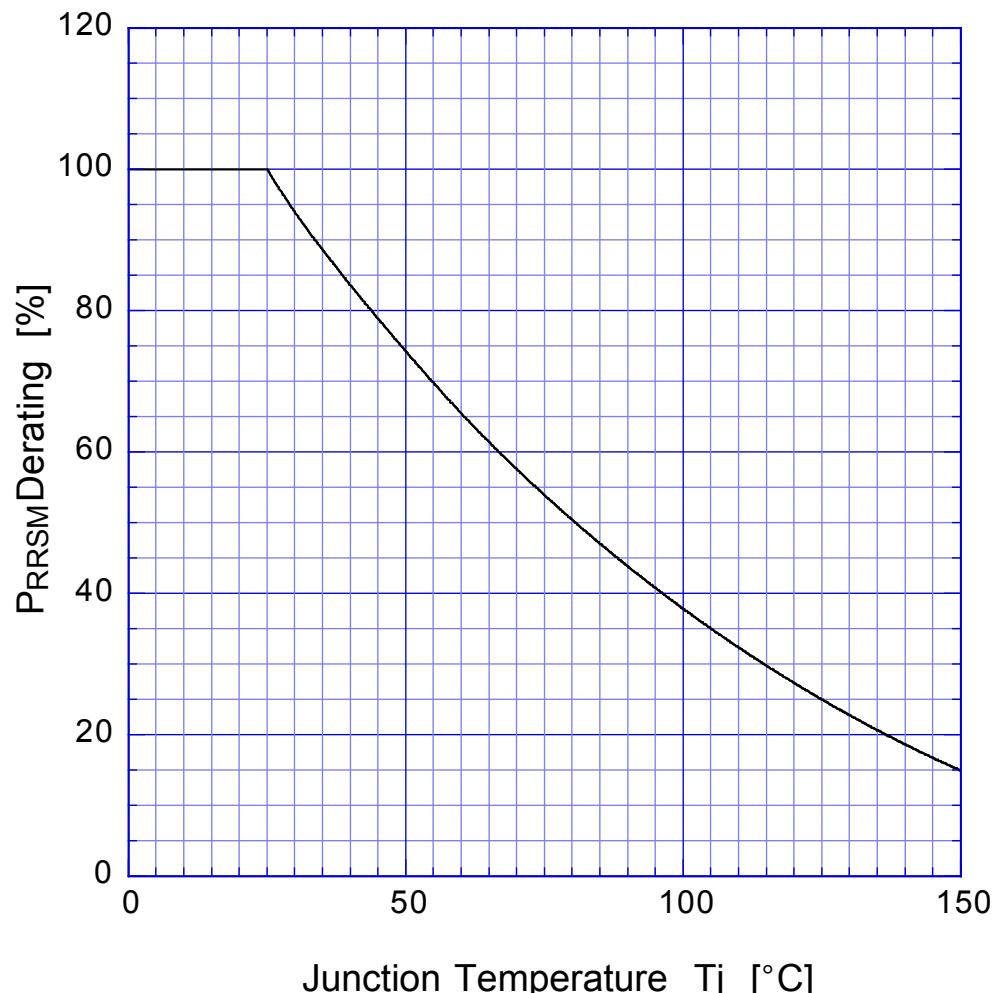

SBD Repetitive Surge Reverse Power Capability

