

DE10SC4

40V 10A


FEATURES

- SMT
- Tj150°C
- PRRSM avalanche guaranteed
- High current capacity with Small Package

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

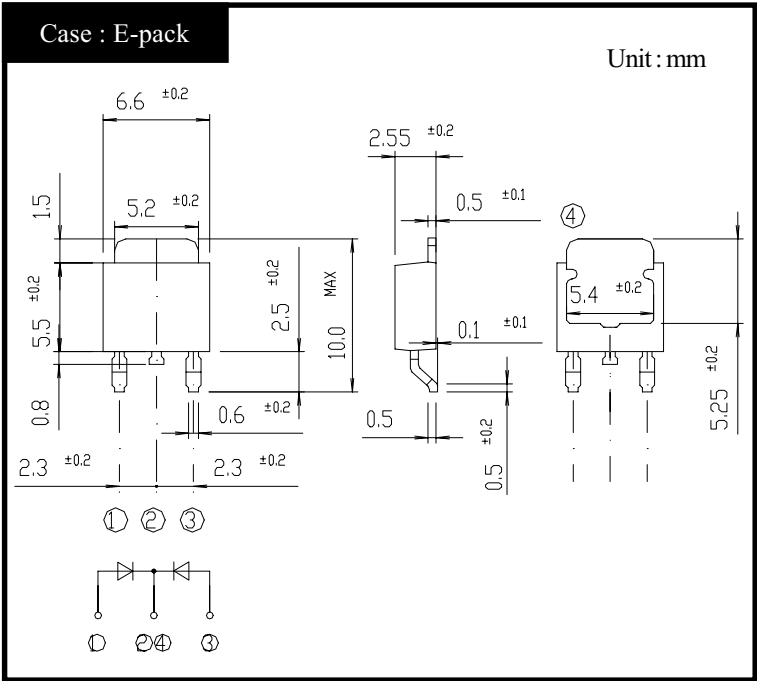

RATINGS

● Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		40	V
Repetitive Peak Surge Reverse Voltage	VRSM	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load, Rating for each diode IO/2, Tc=132°C	10	A
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	100	A
Repetitive Peak Surge Reverse Power	PRSM	Pulse width 10 μs, Rating of per diode, Tj=25°C	330	W

● Electrical Characteristics (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=5A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	IR	VR=VRM, Pulse measurement, Rating of per diode	Max.3.5	mA
Junction Capacitance	Cj	f=1MHz, VR=10V, Rating of per diode	Typ.210	pF
Thermal Resistance	θjc	junction to case	Max.4	°C/W

DE10SC4

Forward Voltage

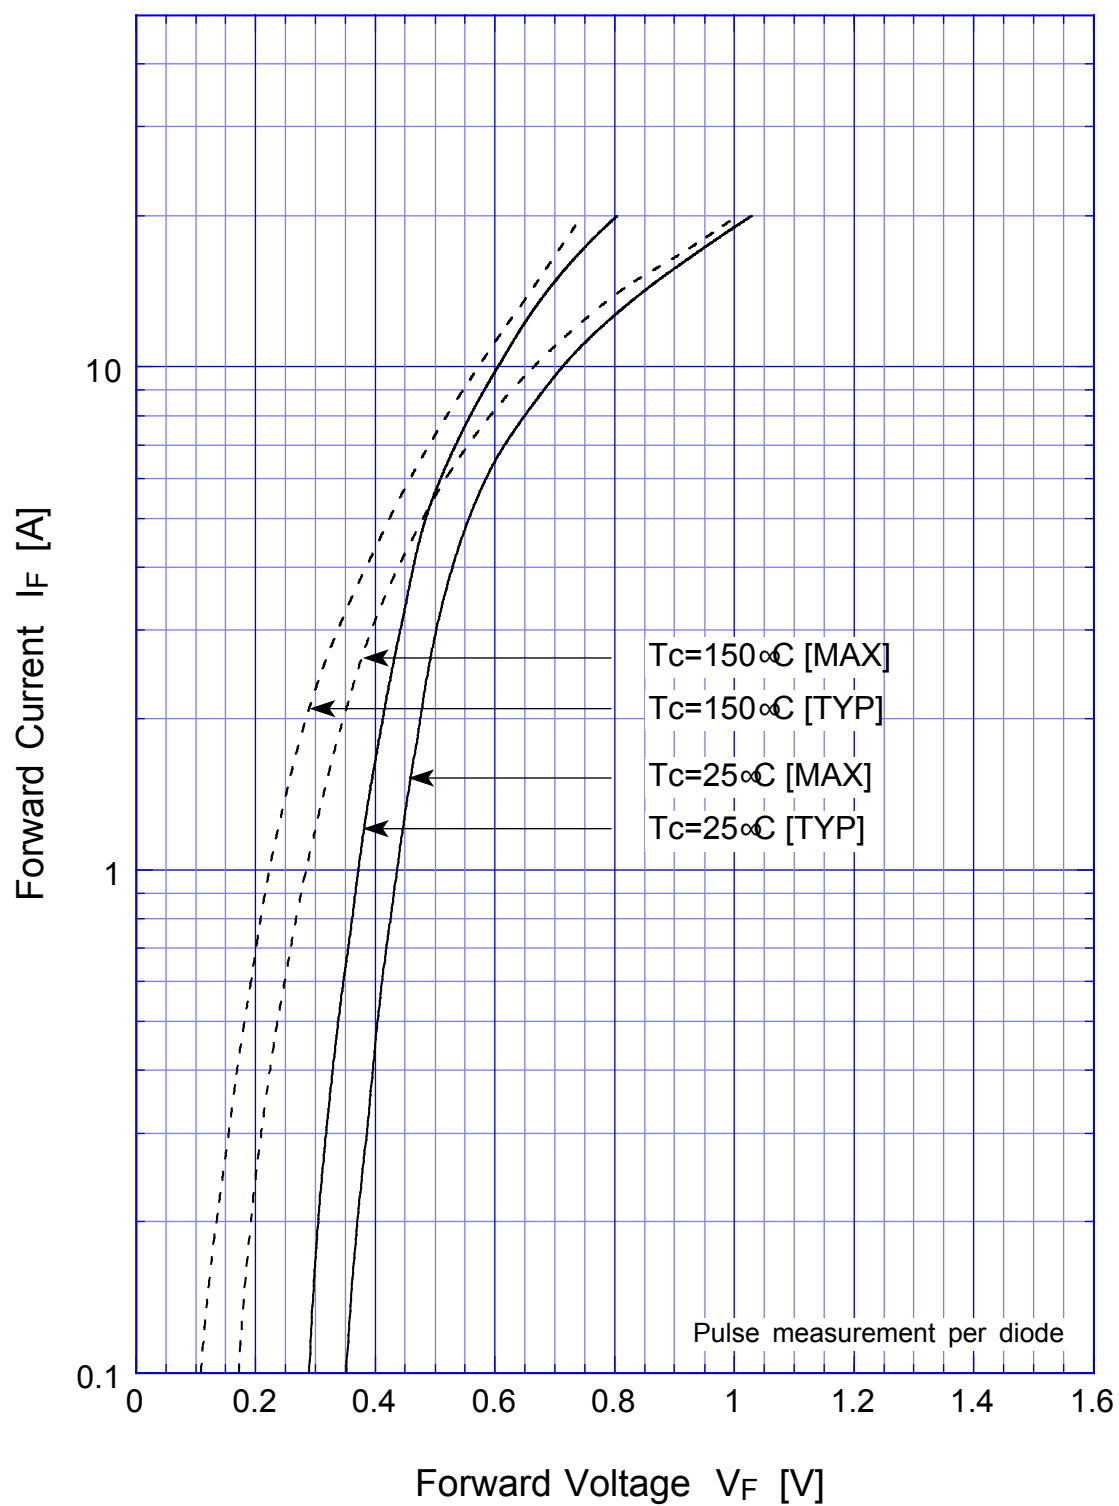


DE10SC4 Junction Capacitance

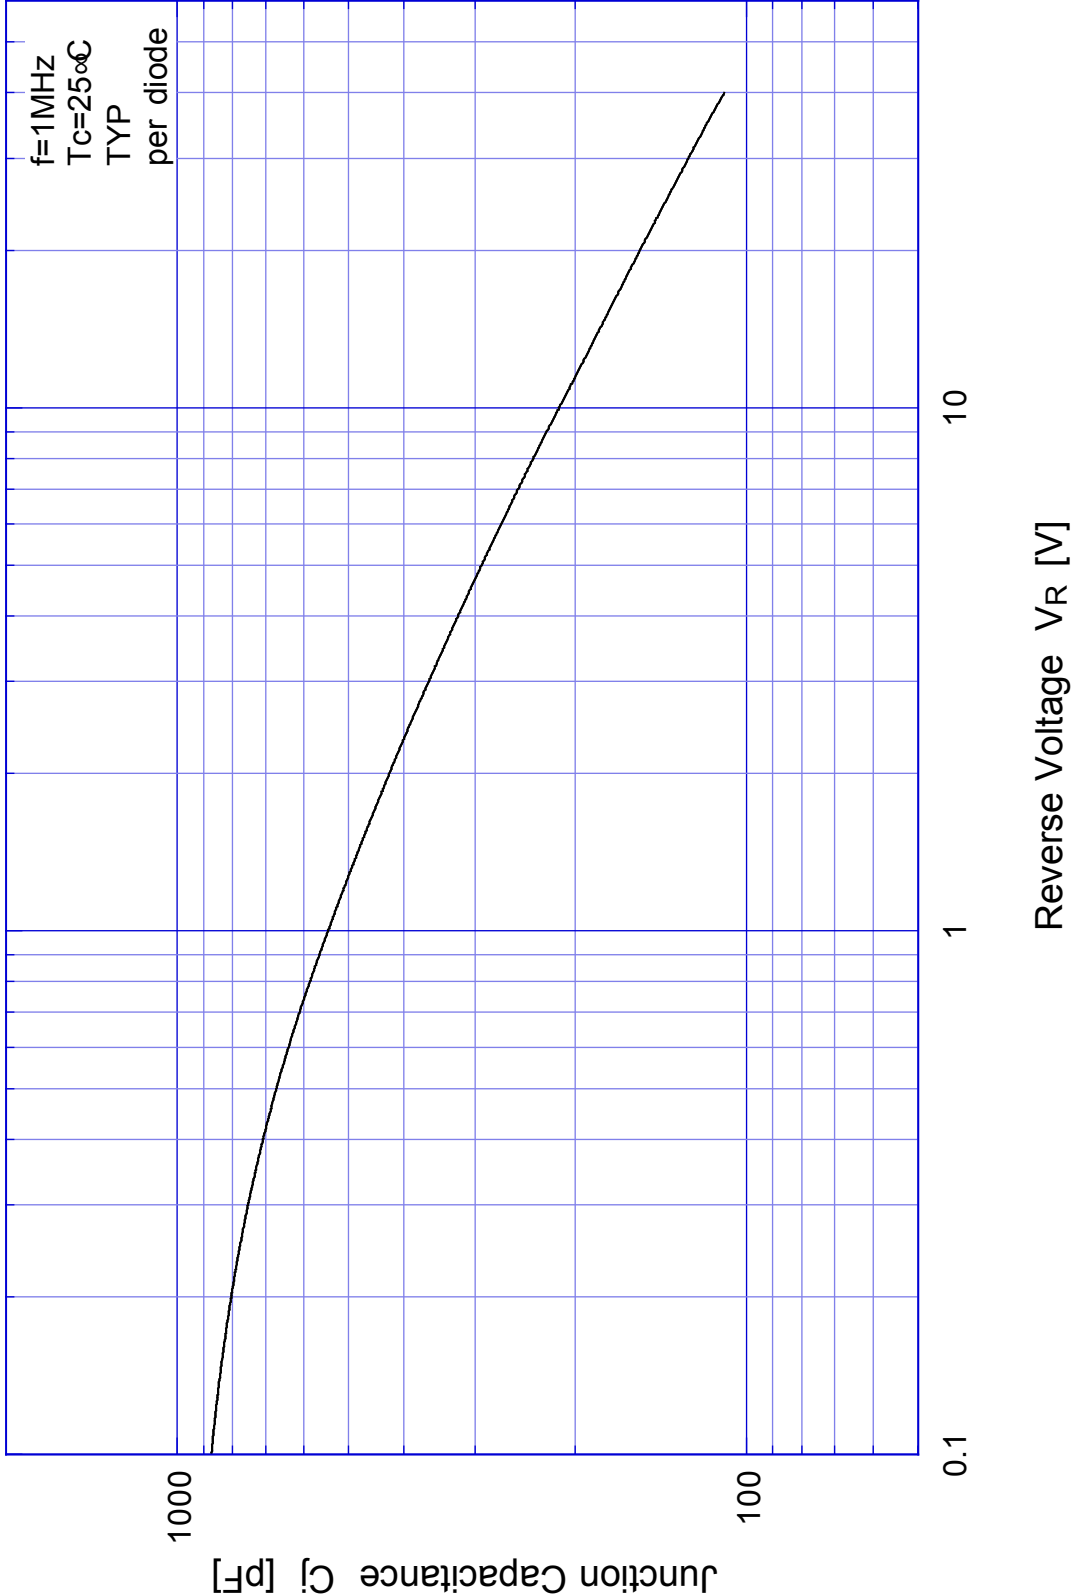


DE10SC4

Reverse Current

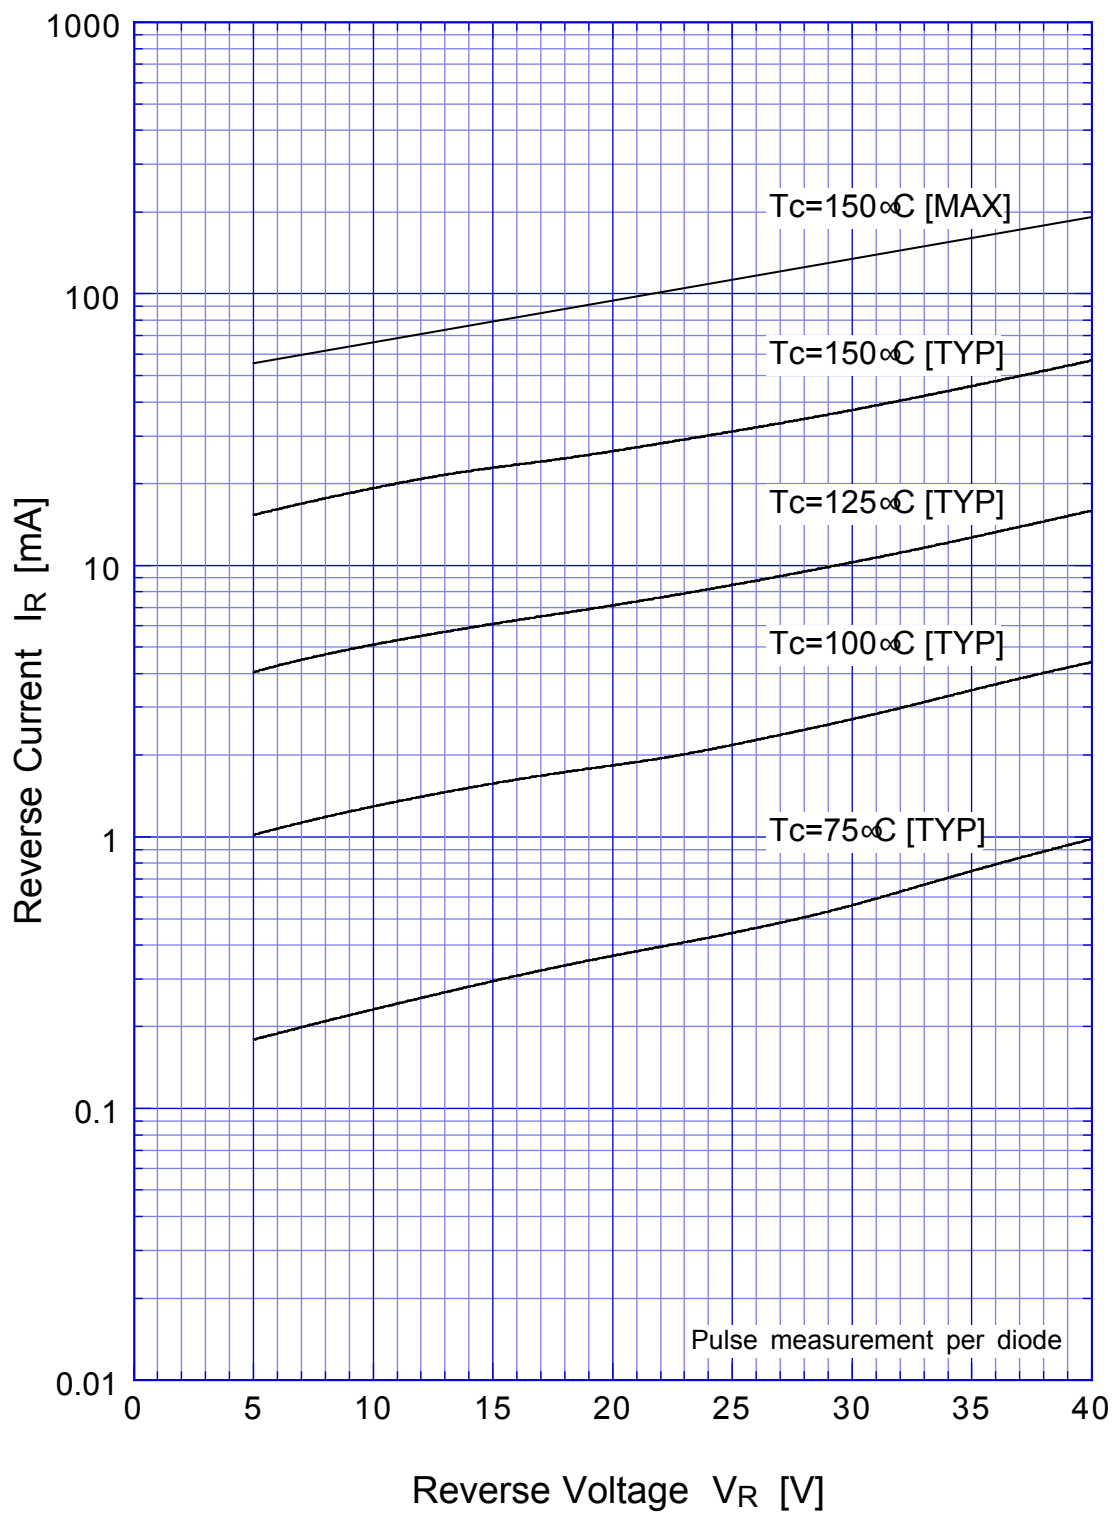


DE10SC4 Reverse Power Dissipation

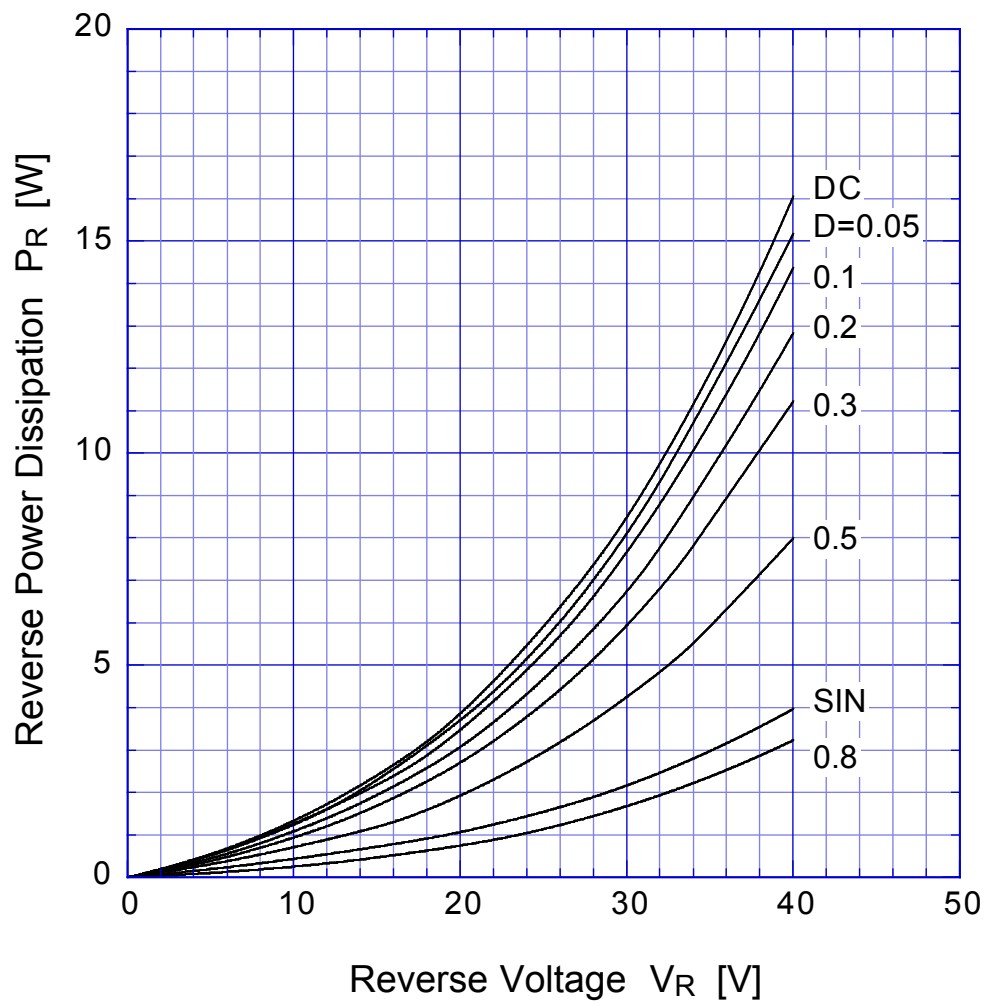

$T_j = 150^\circ\text{C}$



DE10SC4 Forward Power Dissipation

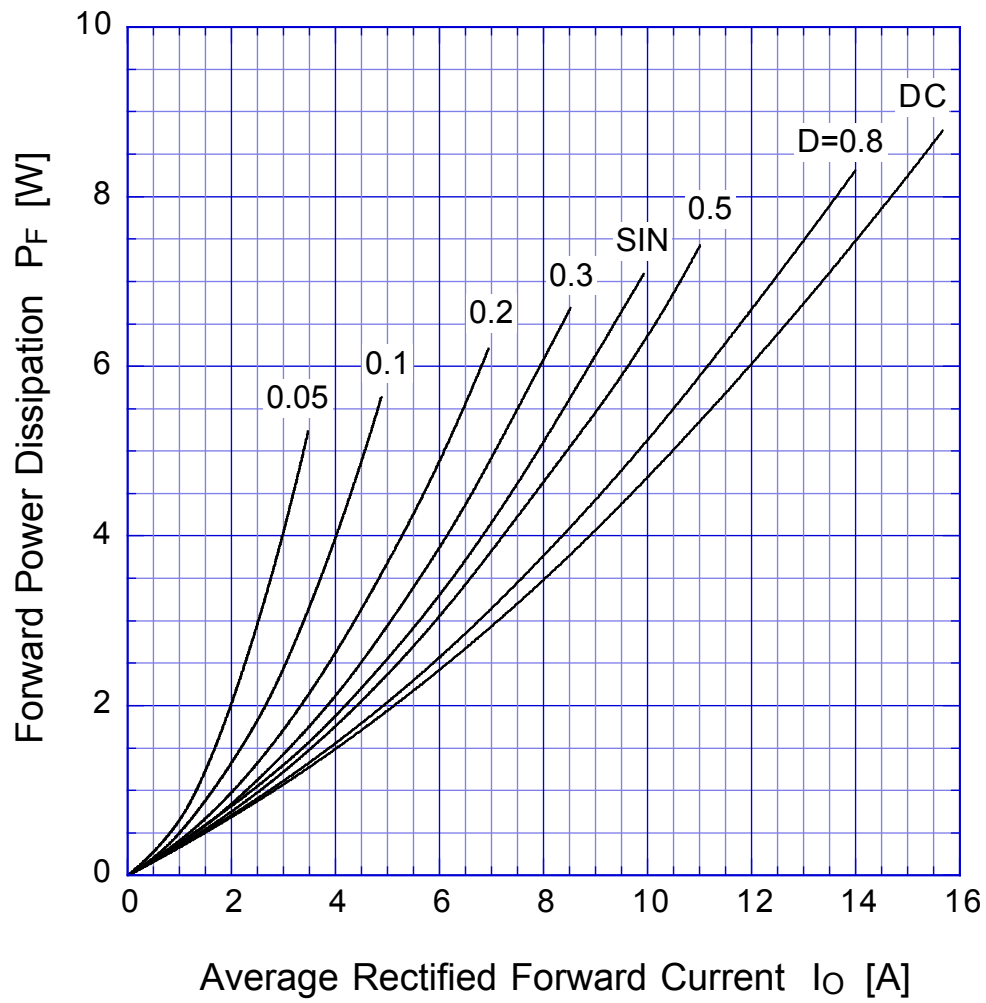


$T_j = 150^\circ\text{C}$




DE10SC4

Derating Curve

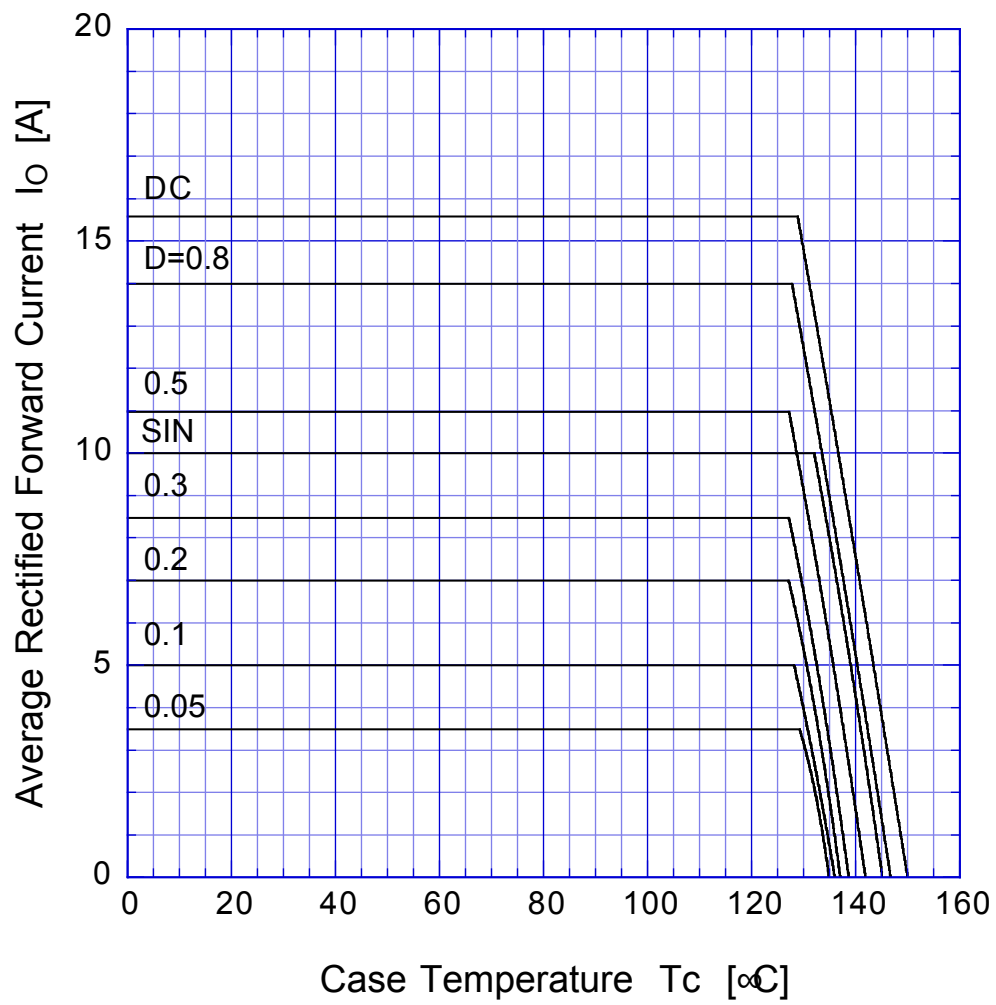


$V_R = 20V$

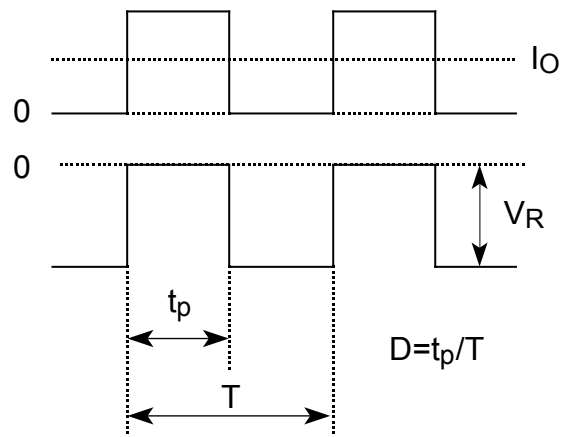

DE10SC4

Peak Surge Forward Capability

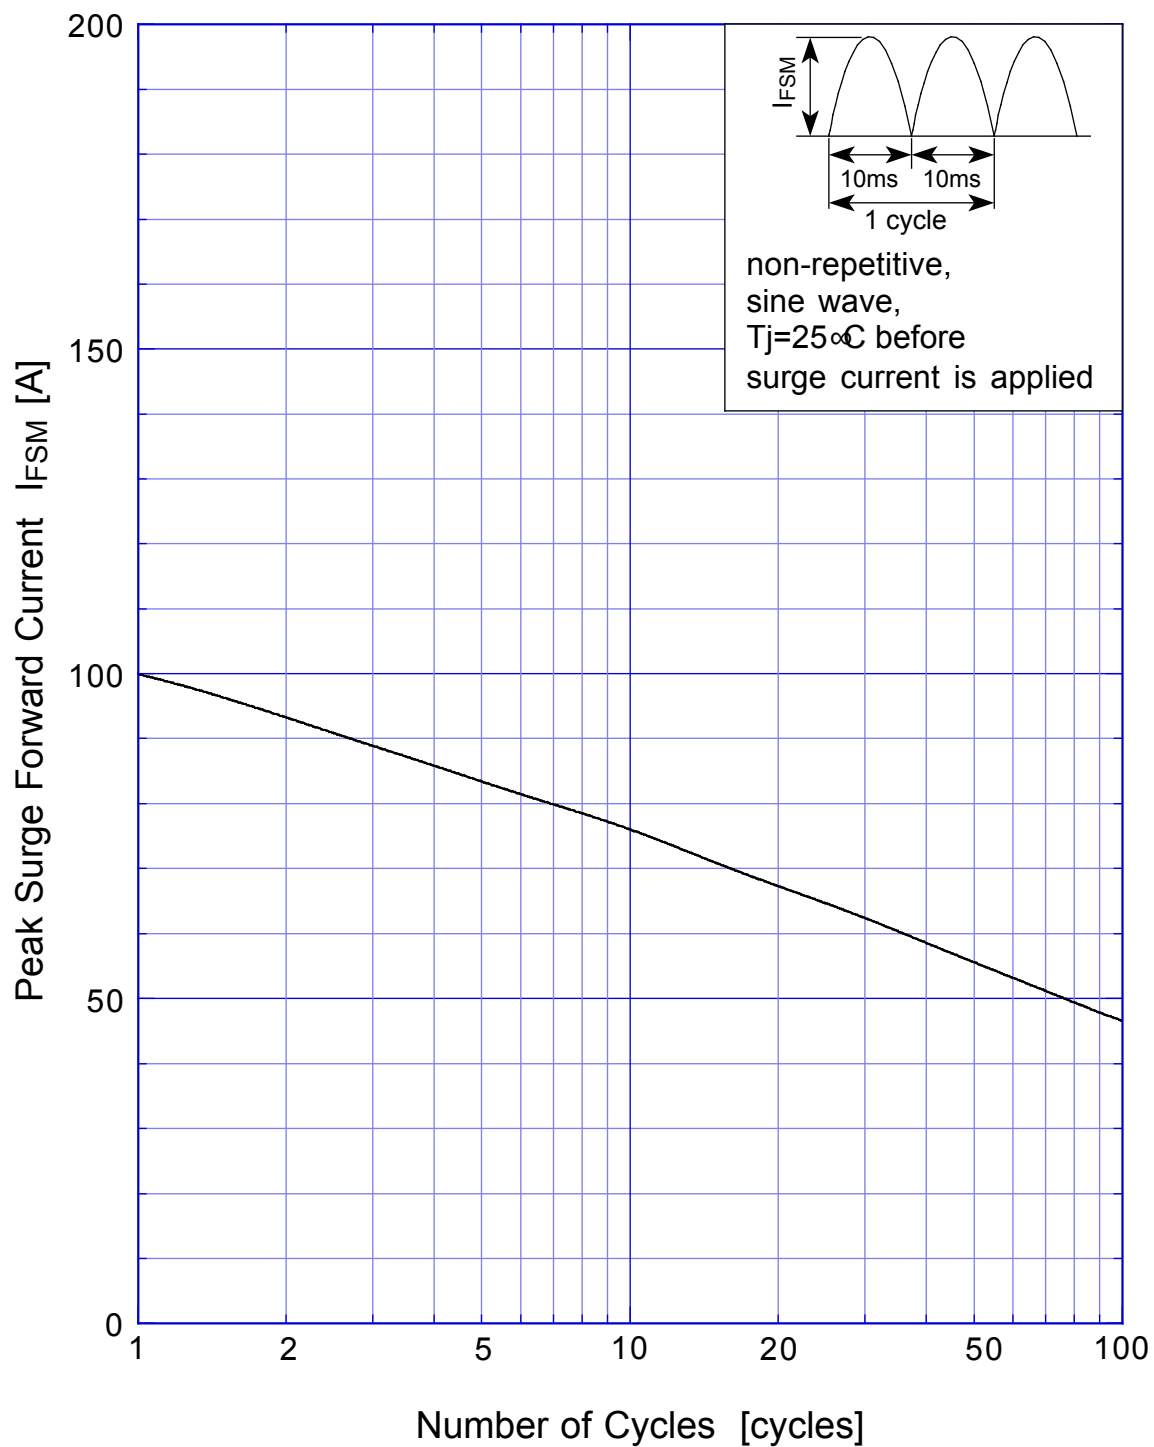

SBD Repetitive Surge Reverse Power Derating Curve



