

DF5VD60

600V 5A


FEATURES

- SMT(STO-220)
- Doubler
- High reliability with superior moisture resistance
- Applicable to Automatic Insertion

APPLICATION

- PFC
- Switching power supply
- Home Appliance, Office Equipment
- Telecommunication, Factory automation

OUTLINE DIMENSIONS

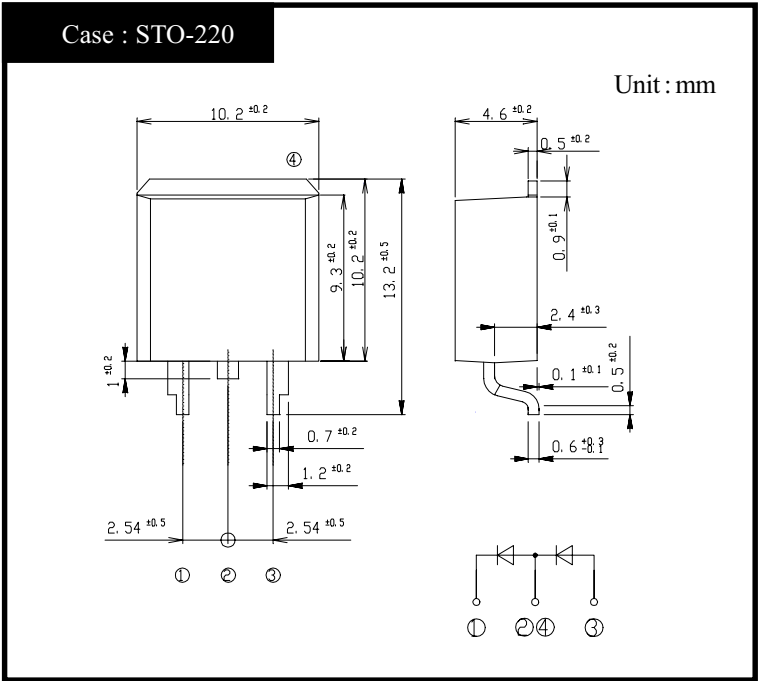

RATINGS

● Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~150	°C
Operating Junction Temperature	T _j		150	°C
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =140°C	5	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, T _j =25°C	140	A

● Electrical Characteristics (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =2.5A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ _{jc}	junction to case	Max.2	°C/W

DF5VD60

Forward Voltage

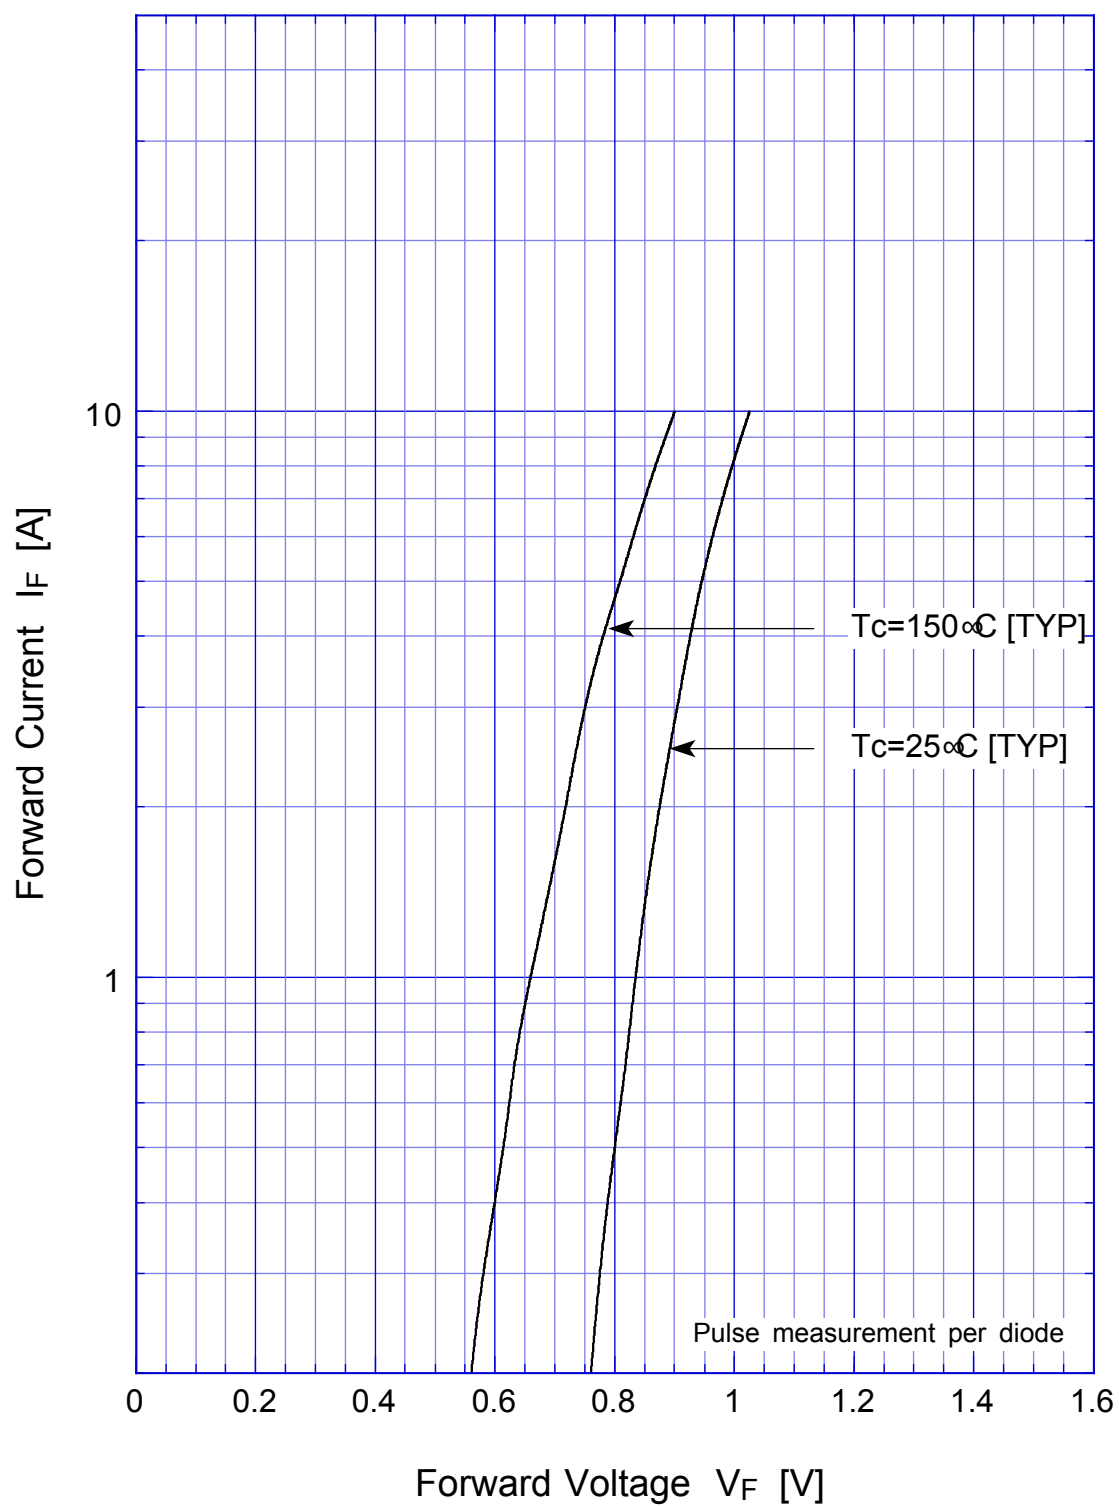


DF5VD60 Forward Power Dissipation

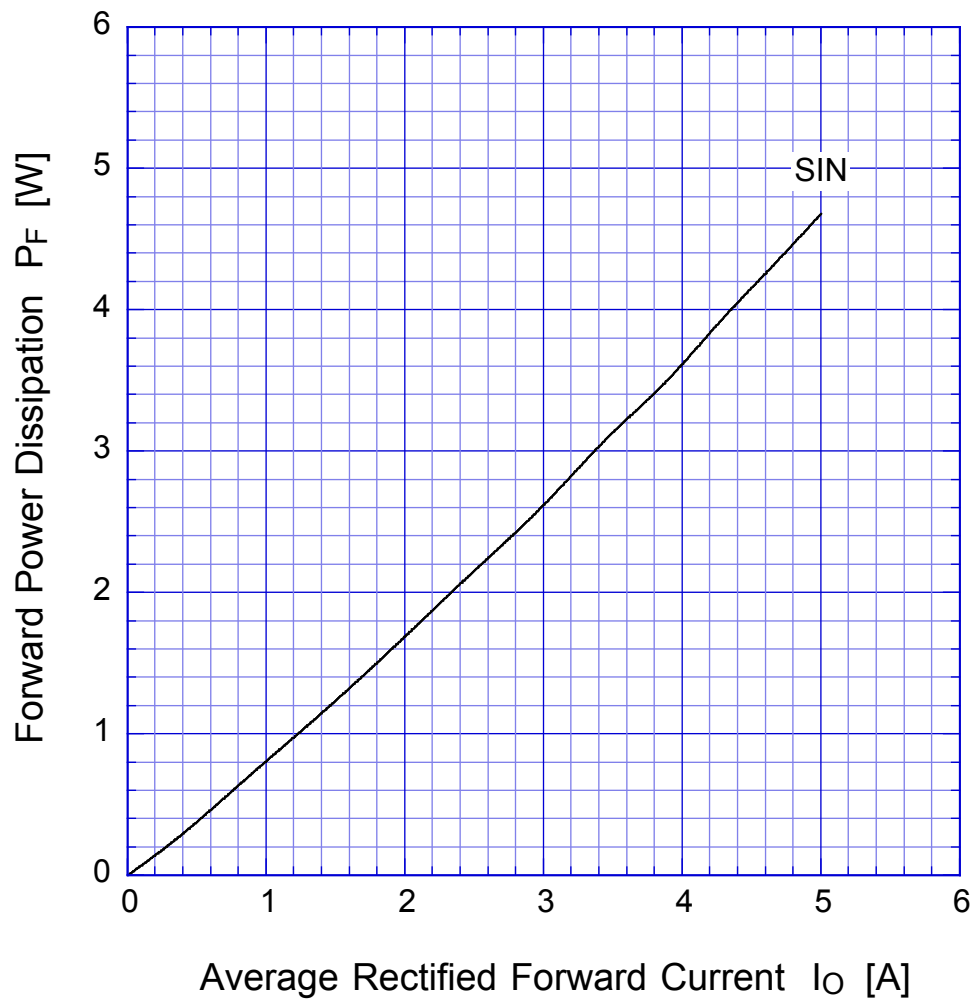

$T_j = 150^{\circ}\text{C}$
Sine wave
R-load
Single phase rectification

DF5VD60

Derating Curve

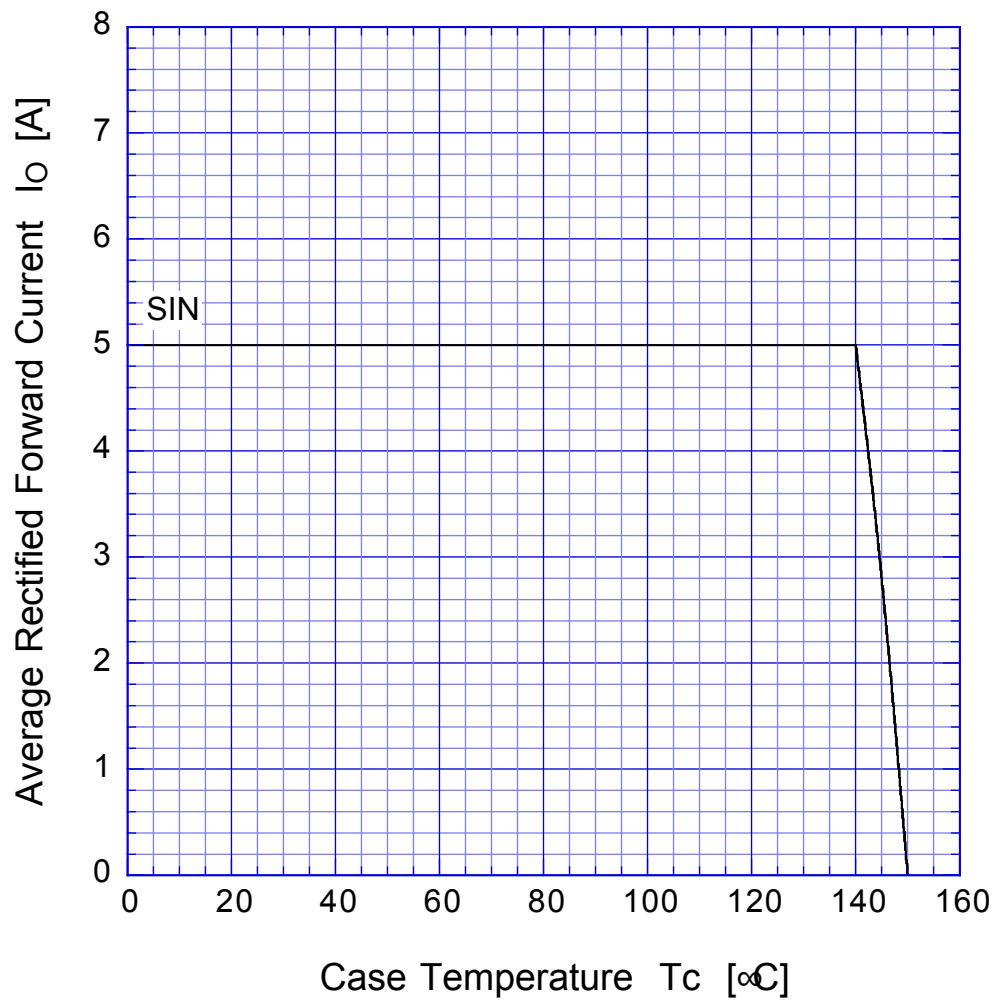

Sine wave
R-load
Single phase rectification

DF5VD60

Peak Surge Forward Capability

