

Combiner

2 Channel Hybrid

Model: DSW1071-A

Application - WIRELESS


- ♦ Base Station
- ♦ PCS1900/DCS1800, EGSM, AMPS

Benefits

- ♦ Internal Termination
- ♦ Excellent Channel Balance
- ♦ Low Insertion Loss

Features

- ♦ Single Junction Isolated Inputs
- ♦ Integral Cable Interconnects
- ♦ Magnetically Screened

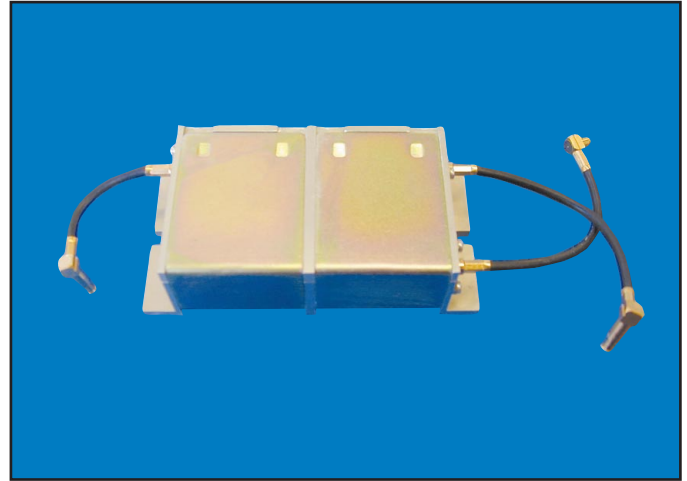

Specifications

Parameter	Specification			Units
Frequency	1930 to 1990			MHz
	Min	Typ	Max	
Insertion Loss	-	3.5	3.6	dB
Return Loss	21	23	-	dB
Isolation (i/p to o/p)	25	28	-	dB
Channel Isolation	50	55	-	dB
Amplitude Balance	-	+/-0.10	+/-0.15	dB
Forward Power (per channel)	-	-	40	W
Operating Temperature	-10	-	+70	°C

