





Telecommunication


ISDN U Transformer

Transformers

DT22-1305

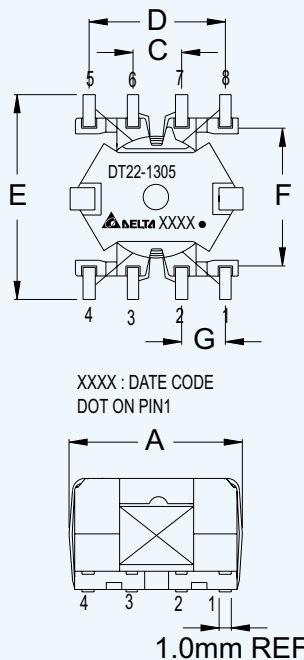

COPLANARITY: 0.006" MAX

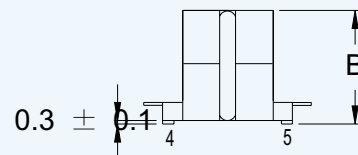

DIMENSIONS IN mm

A	B	C	D	E	F	G
24 MAX.	12.5 MAX.	3.8 ± 0.3	11.4 ± 0.3	21.26 MAX.	12.1 ± 0.3	3.76 ± 0.3

ELECTRICAL CHARACTERISTICS

URNS RATIO	N2:N1 1.0±3% @20KHz, 1V N3:N1 1.6±3% @20KHz, 1V N4:N1 1.6±3% @20KHz, 1V
INDUCTANCE	PRI: 13.3 mH ±10% @10KHz, 1V I _{dc} =60mA
LEAKAGE INDUCTANCE	70 uH Max. @100KHz, 0.1V
D.C. RESISTANCE	N1: 7.0 Ω Max. N2: 7.0 Ω Max. N3: 10.0 Ω Max. N4: 10.0 Ω Max.
INTERWINDING CAPACITANCE	90 pF Max. @100KHz, 0.1V
DIELECTRIC STRENGTH	2000 VAC, 2 SEC @PRI TO SEC 500 VAC, 2 SEC @WDG TO CORE

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

<http://www.deltaww.com>