




Telecommunication ADSL Transformer Transformers

DT32-2003AS
DT32-2006AS

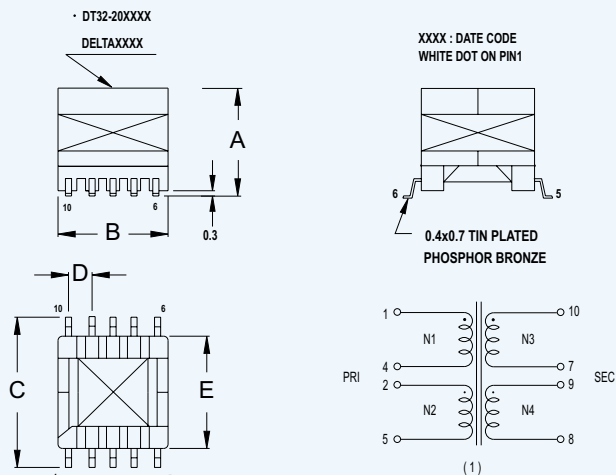

DIMENSIONS IN mm

A	B	C	D	E	F	G
12.5 MAX.	14.0 MAX.	17.10 ±0.2	2.54 ±0.2	14.0 MAX.		

ELECTRICAL CHARACTERISTICS		
	DT32-2003AS	DT32-2006AS
T.R	(PRI:SEC): 1:1 ±2% @20KHz 1V	(PRI:SEC): 1:1 ±1% @20KHz 1V
L	PRI: 1.27mH ±5% @10KHz 0.1V	PRI: 1.27mH ±7% @10KHz 0.1V
L.K	PRI: 10uH Max. @100KHz 0.1V	PRI: 12uH Max. @100KHz 0.1V
D.C.R	N1: 0.37 Ω ±10% N2: 0.37 Ω ±10% N3: 0.47 Ω ±10% N4: 0.47 Ω ±10%	N1: 0.46 Ω Max. N2: 0.46 Ω Max. N3: 0.46 Ω Max. N4: 0.46 Ω Max.
HI-POT	1500 VAC 2 SEC	1500 VAC 2 SEC
C	-----	-----
I.L	-----	-----
L.B	-----	-----
FR	-----	-----
R.L	-----	-----
T.H.D	-----	-----
Schematic	1	1

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.
TEL: 886-3-3626301 FAX: 886-3-3618901
<http://www.deltaww.com>