



## 3-WAY DIVIDER /COMBINER

### MODEL DC03

#### 3-WAY IN-PHASE DIVIDER/COMBINERS

##### Guaranteed Specifications

Model Number	Frequency MHz	Insertion Loss dB	Isolation dB	Amplitude Balance dB	Phase Balance Degrees	VSWR Max.
DC03A	750 to 850	0.3	15	$\pm 0.4$	$\pm 2$	1.5:1
DC03B	800 to 1000	0.3	15	$\pm 0.4$	$\pm 2$	1.5:1
DC03C	900 to 1100	0.3	15	$\pm 0.4$	$\pm 2$	1.5:1
DC03D	1000 to 1200	0.3	15	$\pm 0.4$	$\pm 2$	1.5:1

Note: All specifications apply in a 50 Ohm system. Loss does not include 4.77 dB Splitter Loss.

##### Maximum Ratings

Input Power (Terminated)	10 Watt
Input Power (Unterminated)	200 mW
Temperature Range	-54°C to +85°C

##### Applications


These Dividers were designed for cell site applications where Tele-Tech's proprietary processes guarantee low loss, high isolation, and uniform part-to-part performance. In addition Tele-Tech's plating process insures years of high performance under the worst environmental conditions. These N way dividers are available for any combination of 2 and 3 way dividers in the frequency range of 500 MHz to 3 GHz with less than 25% bandwidth.

##### Reliability

All units are designed and constructed to meet or exceed specifications after exposure to any or all of the following MIL-STD-202 tests which are applicable.

Test	Method	Condition
Temperature Cycle	107G	A
Thermal Cycle	107G	AA
Vibration	204D	A
Mechanical Shock	213B	C

##### Outline Drawing

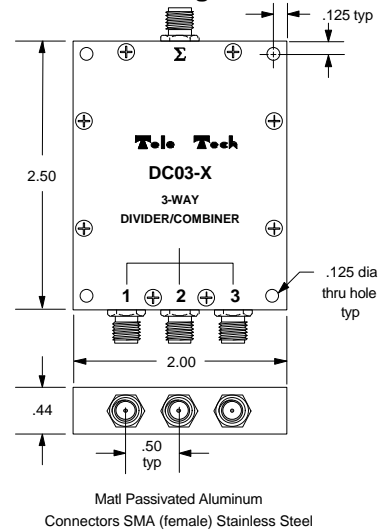

All characteristics of Tele-Tech products may be modified to meet customer requirements.

P.O. Box 790, Bozeman, Montana 59717  
Phone: (406) 586-0291 Fax: (406) 587-0653 E-mail: admin@tele-tech-rf.com