


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, sale, manufacturing and reproduction rights thereto.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
A	Released on ECN #1234	01/03/02	M. A.

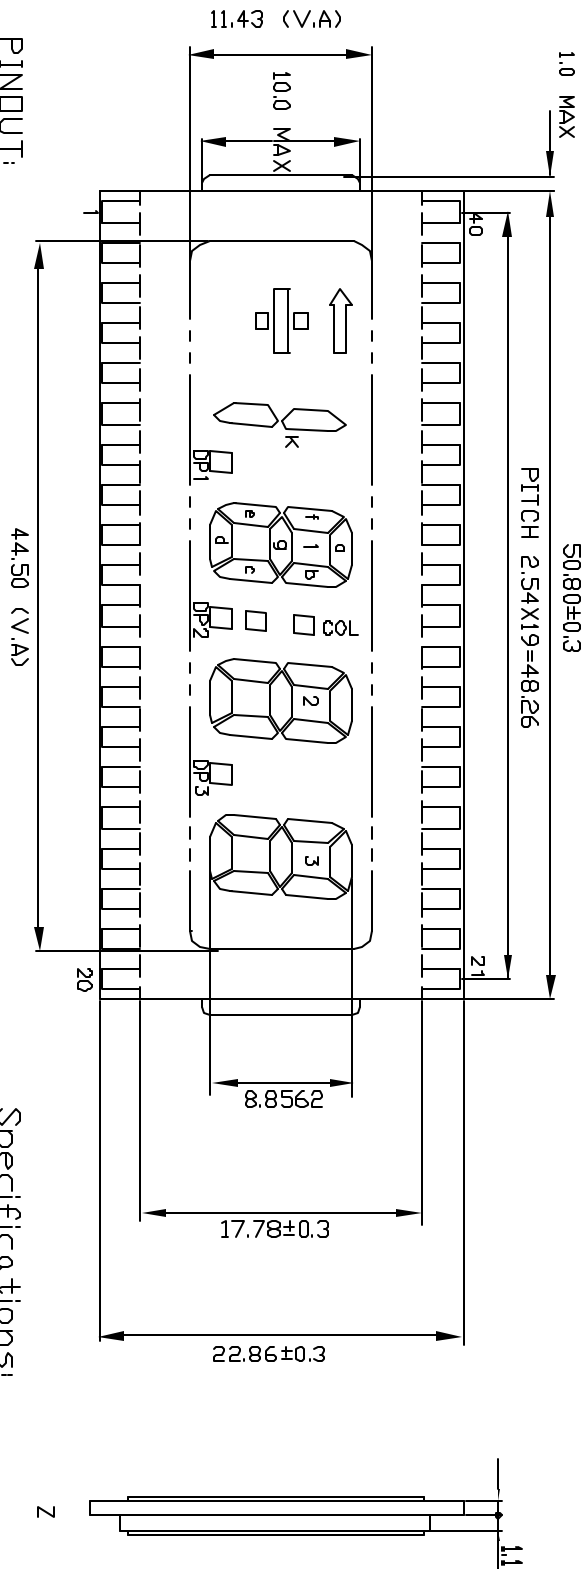

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	11	3c	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	K	13	2e	23	1g	33	NC
4	NC	14	2d	24	2b	34	NC
5	NC	15	2c	25	2a	35	NC
6	NC	16	2DP	26	2f	36	NC
7	NC	17	1e	27	2g	37	NC
8	4DP	18	1d	28	L	38	←
9	3e	19	1c	29	3b	39	I
10	3d	20	1b	30	3a	40	COM

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-038-XZ-W	ZEBRA TYPE	DG-038-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			

Unless otherwise specified, Dimensions are mm Tolerances are:		DENSITRON TECHNOLOGIES PLC.	
APPROVALS	DATE	TITLE LCD SEGMENTED GLASS	
DRAWN			
CHECKED			
ISSUED		DWG. NO. DG-038	SHEET 1 OF 1

