


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sale, manufacturing and reproduction rights therein.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

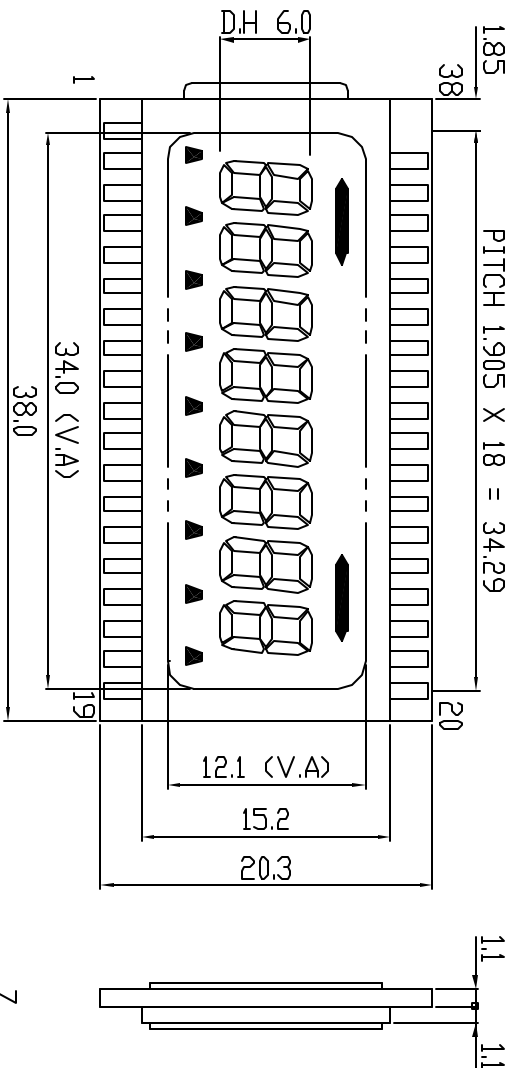

PINOUT:


Pin No.	COM1	COM2	Pin No.	COM1	COM2	Pin No.	COM1	COM2	Pin No.	COM1	COM2
1		COM2	11	4c	4d	21	1a	1f	31	6b	6DP
2	8g	8e	12	3g	3e	22	P9	NC	32	6a	6F
3	8c	8d	13	3c	3d	23	2b	2DP	33	7b	7DP
4	7g	7e	14	2g	2e	24	2a	2F	34	7a	7F
5	7c	7d	15	2c	2d	25	3b	3DP	35	P10	NC
6	6g	6e	16	1g	1e	26	3a	3F	36	8b	8DP
7	6c	6d	17	1c	1d	27	4b	4DP	37	8a	8F
8	5g	5e	18		COM2	28	4a	4F	38	COM1	
9	5c	5d	19	COM1		29	5b	5DP			
10	4g	4e	20	1b	1DP	30	5a	5F			

Specifications:

CONNECTION TYPE	Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C

Ordering Information

DG-067-XZ	ZEBRA TYPE
Replace the "X" in the above part number with "R" for Reflective polarizer, "B" for Transflective Polarizer, or "F" for Transmissive Polarizer.	



Unless otherwise specified, dimensions are mm. Tolerances are: X = ± 3, X = ± 0.5, .XX = ± 0.05, CAGE CODE #DIVS2		APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
		DRAWN		TITLE	
		CHECKED		LCD SEGMENTED GLASS	
		ISSUED		DWG. NO.	DG-067
				SHEET 1 OF 1	