

DE3L20U

200V 3A


FEATURES

- SMT
- Low noise
- trr35ns

APPLICATION

- Switching power supply
- DC/DC converter
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

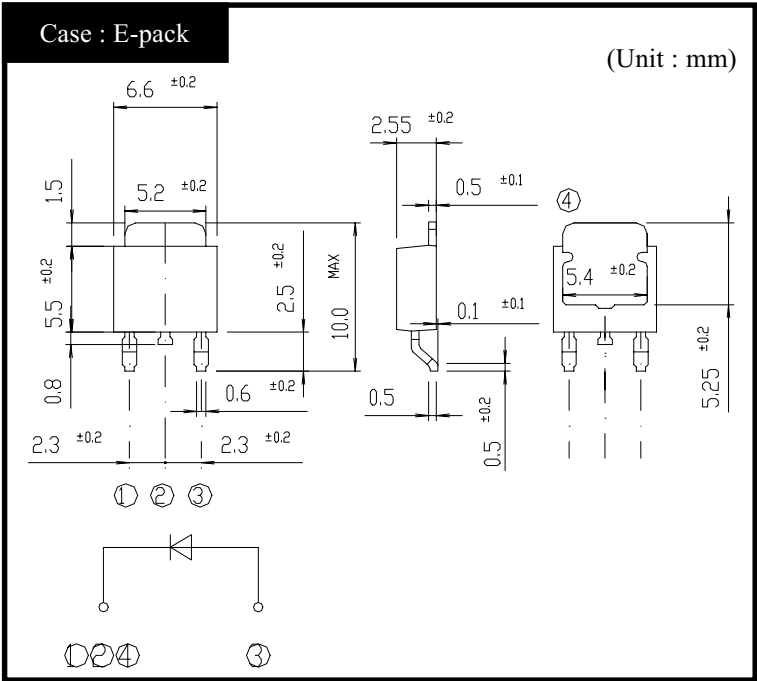

RATINGS

● Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		200	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load, Tc=113°C	3	A
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	60	A

● Electrical Characteristics (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=3A, Pulse measurement	Max.0.98	V
Reverse Current	IR	VR=VRM, Pulse measurement	Max.10	μA
Reverse Recovery Time	trr	IF=0.5A, IR=1A	Max.35	ns
Thermal Resistance	θjc	junction to case	Max.12	°C/W

DE3L20U


Forward Voltage

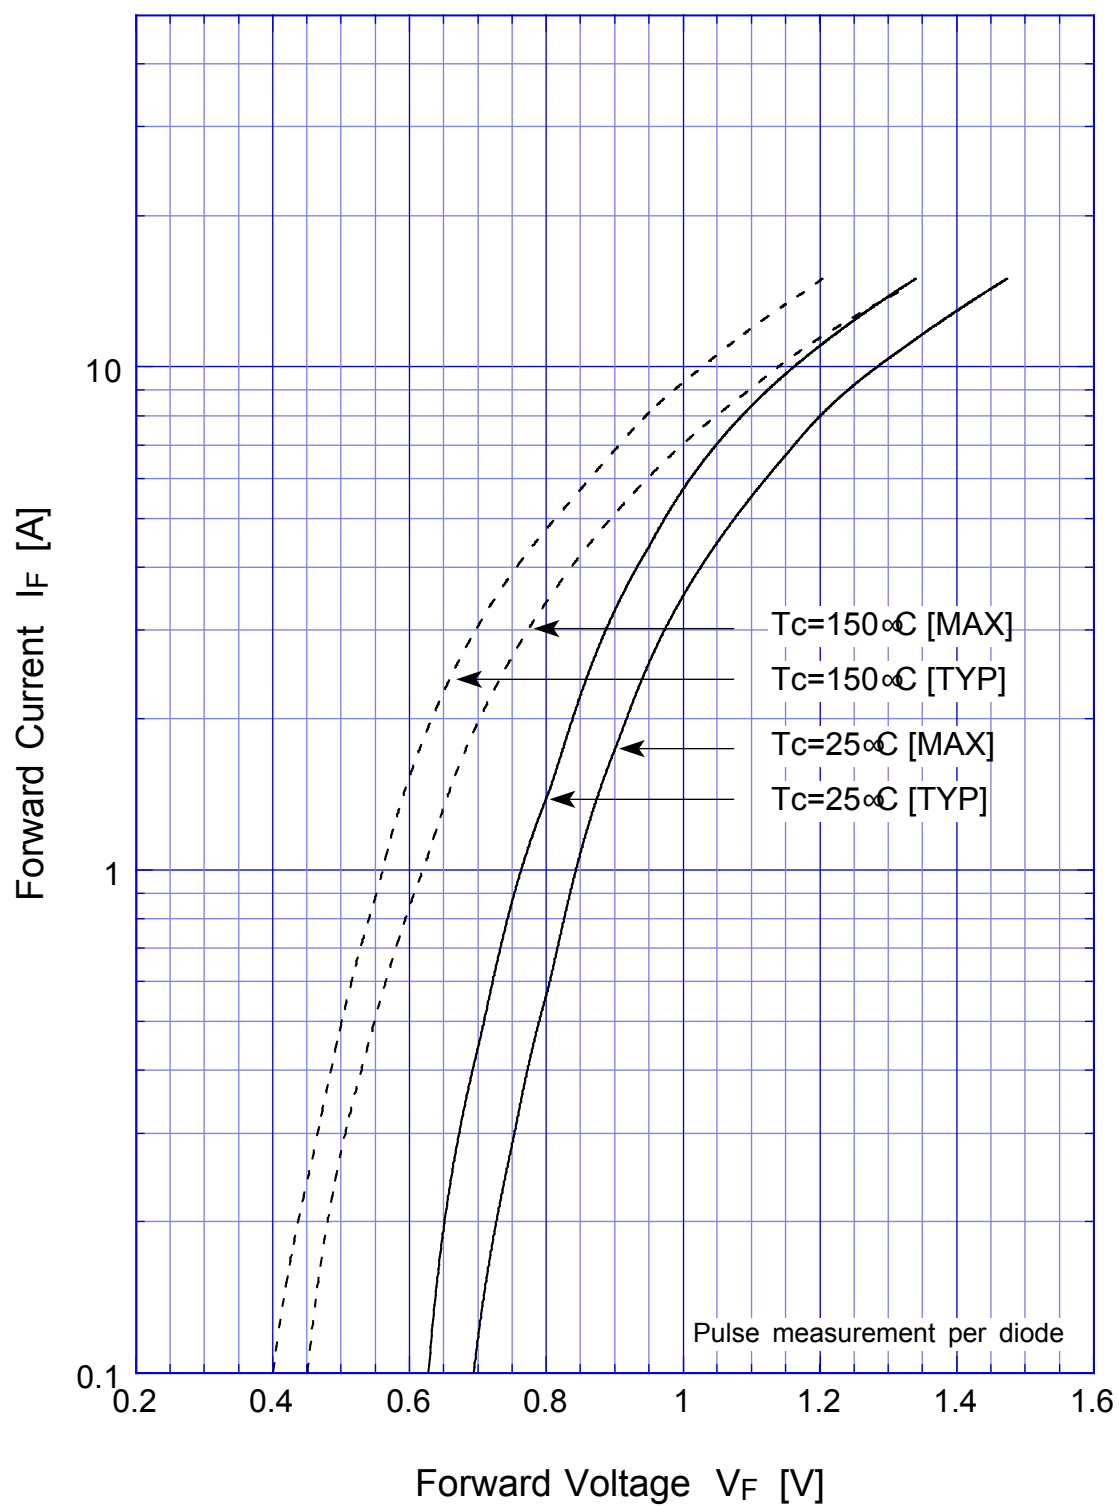

DE3L20U Forward Power Dissipation

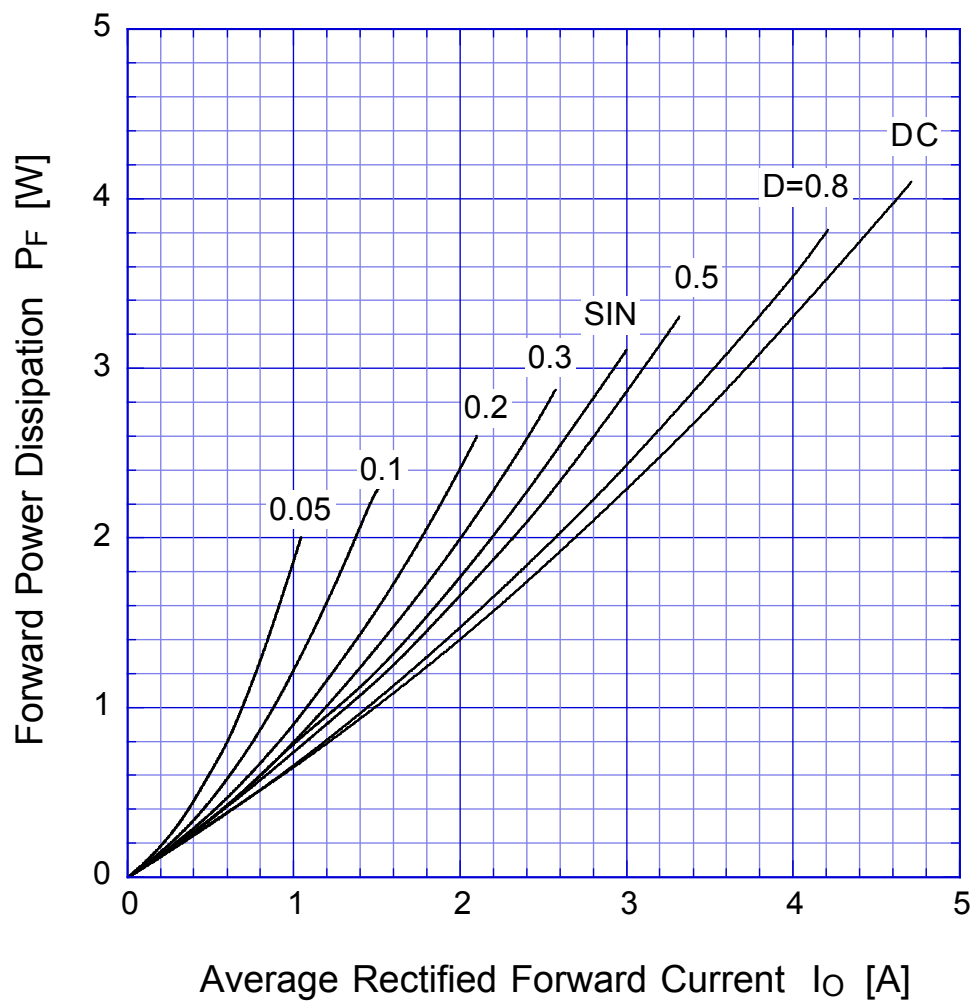


$T_j = 150^\circ\text{C}$

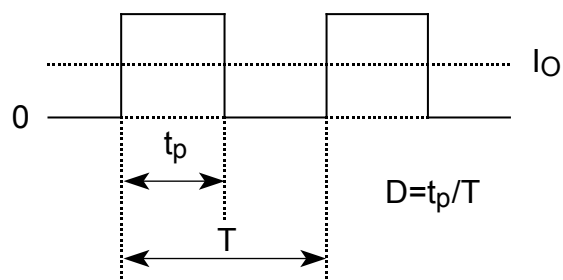


DE3L20U

Derating Curve

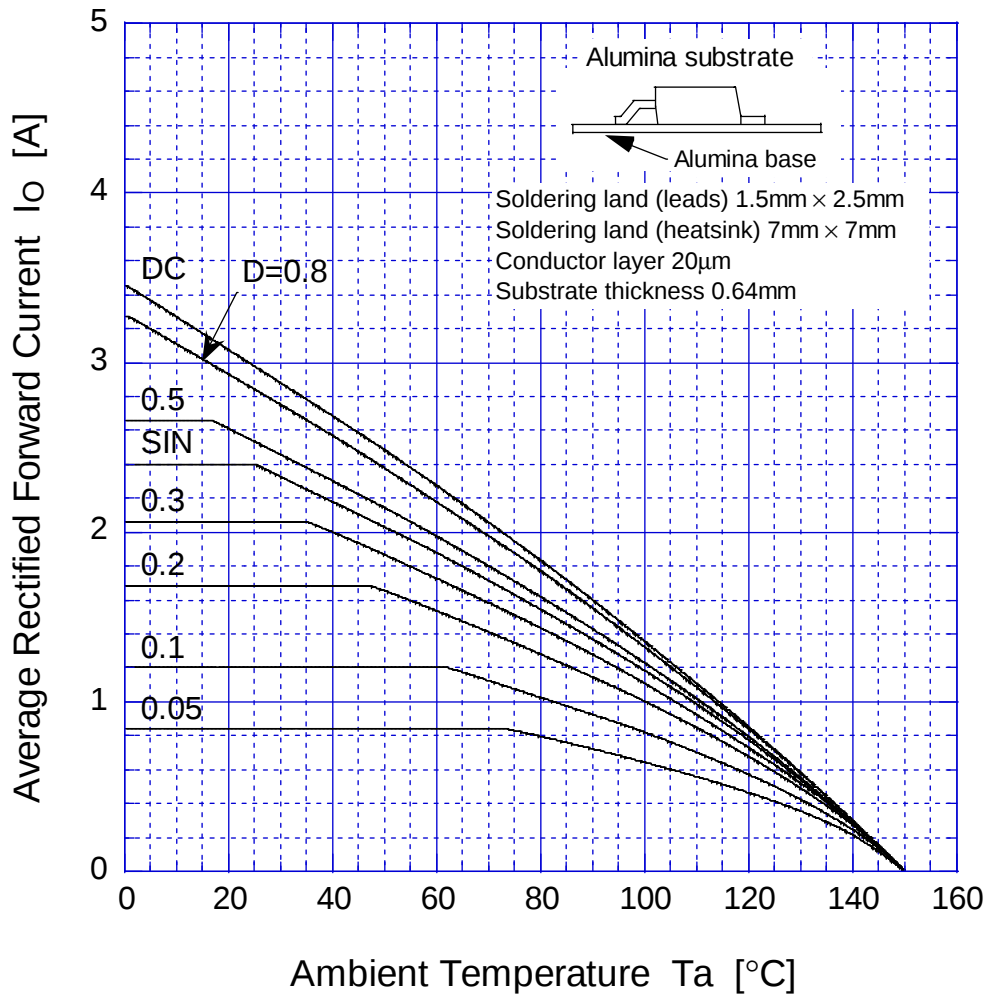


$V_R = 200V$

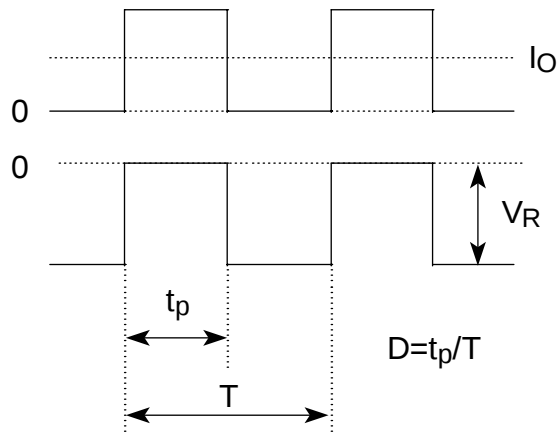


DE3L20U

Derating Curve

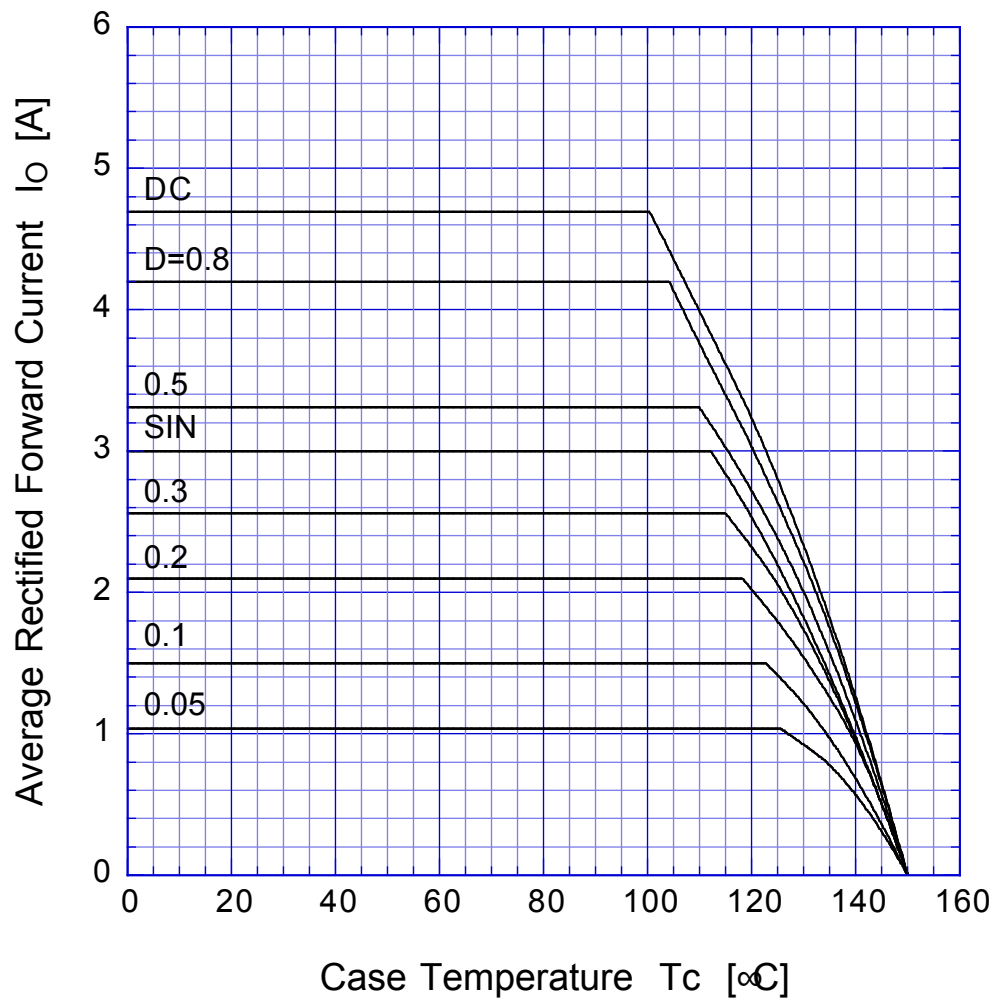


$V_R = 200V$

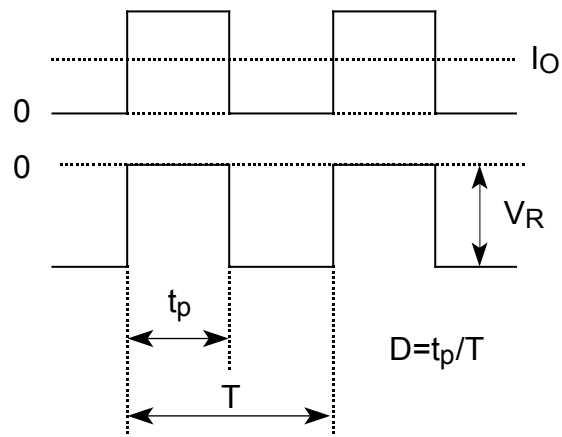

DE3L20U

Peak Surge Forward Capability

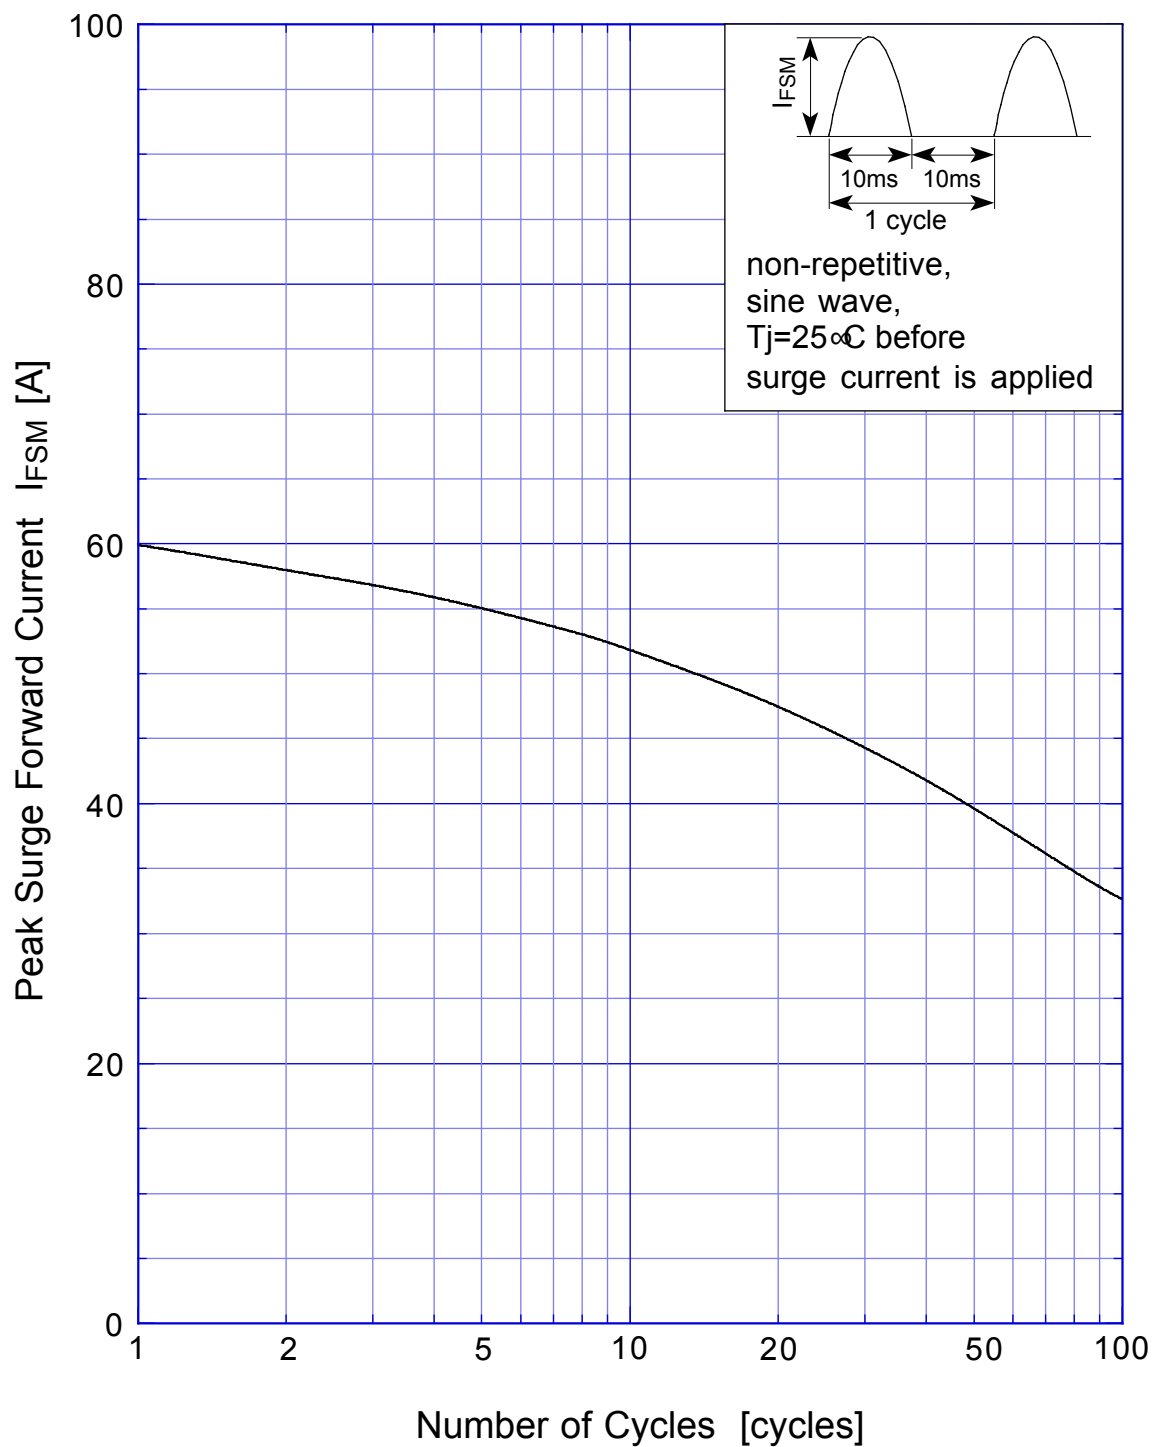

DE3L20U Junction Capacitance

