


DB4364S-2

Tx Combiner
279-281 MHz

PRELIMINARY

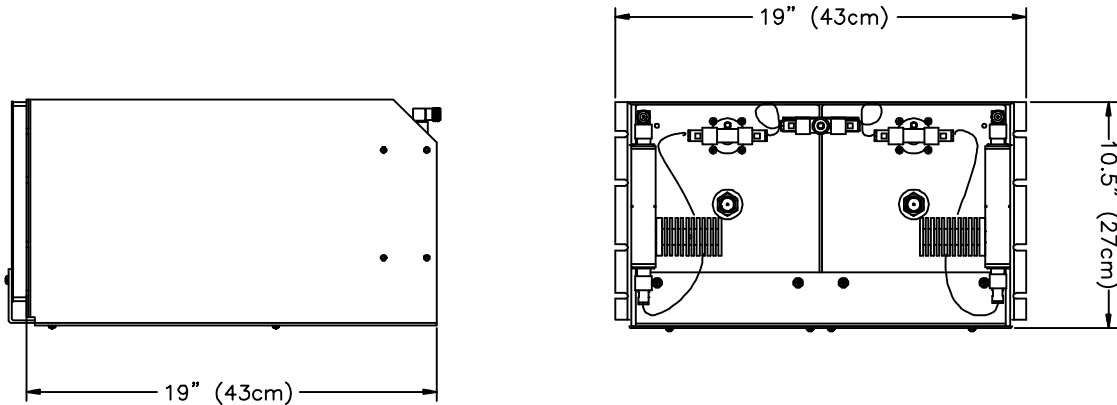

ELECTRICAL DATA		MECHANICAL DATA	
Model Number	DB4364S-2	Temperature Range ($\pm$ F°/C°)	-30° to +60° C
Application	Tx combiner for 280 MHz paging systems.	Connectors (Input/Output)	Type N-Female
Frequency Range	279-281 MHz	Finish	Tek Black
Frequency Spacing	150 KHz (min)	Mounting	19" Rack
Isolation: Tx to Tx	65 dB	Dimensions (DxWxH - max.)	19" x 19" x 10.5" (48 x 48 x 27 cm)
Isolation: Ant to Tx	50 dB	Weight	54 lbs (24.5 kg)
Selectivity	30 dB (min) $\pm$ 1 MHz from center frequency	Specifications are for reference only. 099166-002-PRE 7/98A	
VSWR (Input/Output) (at 50 ohms)	1.25 : 1		
Input Power Rating	125 Watts		
Insertion Loss	2.7 dB (max)		



DECIBEL PRODUCTS
A Division of Allen Telecom Inc.

8635 Stemmons Freeway • P. O. Box 569610 • Dallas, Texas 75356-9610
214 / 631-0310 • Fax: 214 / 631-4706

