

The DW9274 SAW filter is a Quartz based device offering narrow band, highly selective performance with excellent temperature stability characteristics, which make it an ideal choice for E-TACs cellular mobile phone requirements.

The device is available in a Surface Mount leadless, ceramic chip carrier suitable for high volume, automated assembly systems.

### FEATURES

- 92.025MHz Centre Frequency (fo)
- Insertion Loss 3dB (Typ)
- 3dB Bandwidth 30kHz (Min)
- Quartz Temperature Stability
- Low Profile Ceramic SMT Package

### ABSOLUTE MAXIMUM RATINGS

DC Voltage VDV 0V  
Maximum Input Level 0dBm

### ORDERING INFORMATION

DW9274

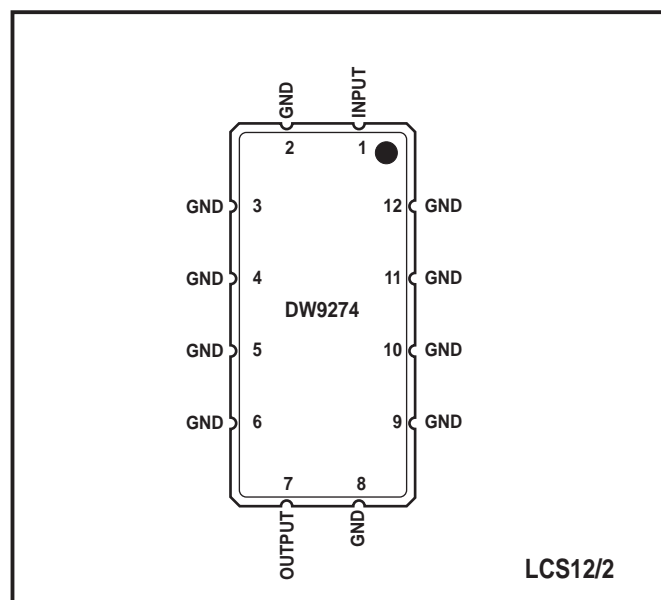


Fig. Pin connections

### ELECTRICAL SPECIFICATION @25°C

Parameter	Spec	Typ	Units
Nominal Frequency (fo)	92.025	92.025	MHz
Passband			
Insertion Loss (IL)	4 Max	3	dB
3dB Bandwidth	30 Min	63	kHz
Ripple (fo±15kHz)	1 Max	0.5	dB
Group Delay (fo±15kHz)	-	<4	µs
Stopband			
fo±50kHz	5	7	dB
fo±100kHz	35	40	dB
fo+200kHz to fo +500kHz	25	45	dB
fo+500kHz to fo +1000kHz	40	55	dB
fo-300kHz to fo -900kHz	60	70	dB
fo-900kHz to fo -920kHz	70	75	dB
fo-920kHz to fo -1000kHz	60	70	dB
Maximum Input Level	0	-	dB
Operating Temperature Range	-10 to +65°C		
Package	12 Lead Ceramic LCC 13.6 x 6.8 x 1.93mm (Max).		
Terminating Impedance	850Ω/-2pf		

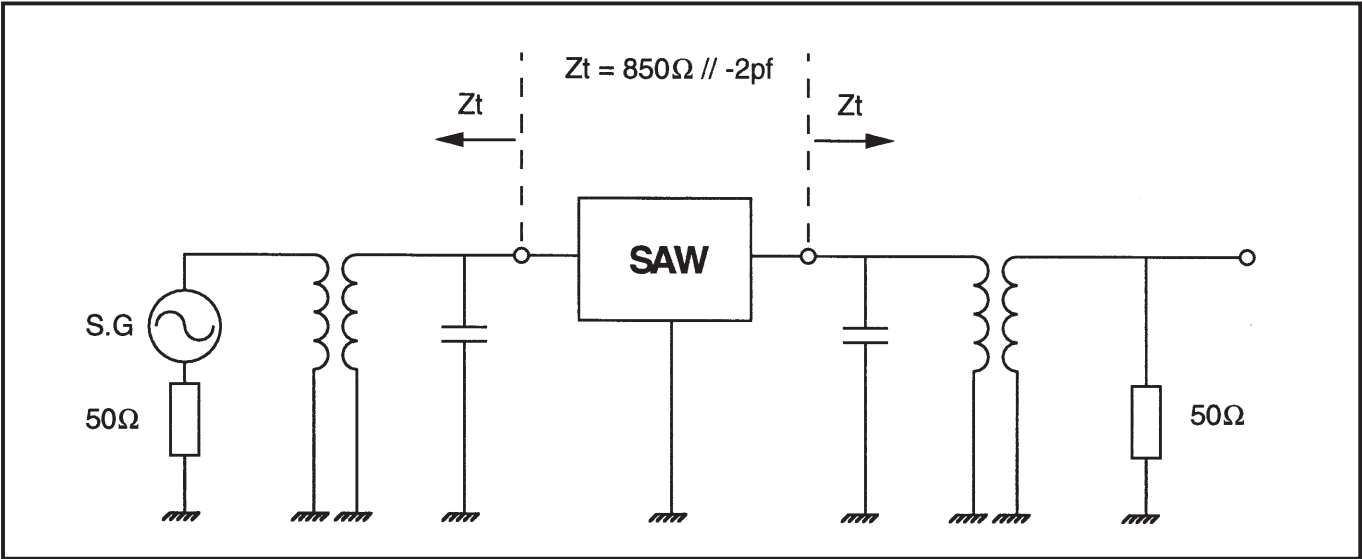


Figure 2: 50Ω Test Circuit


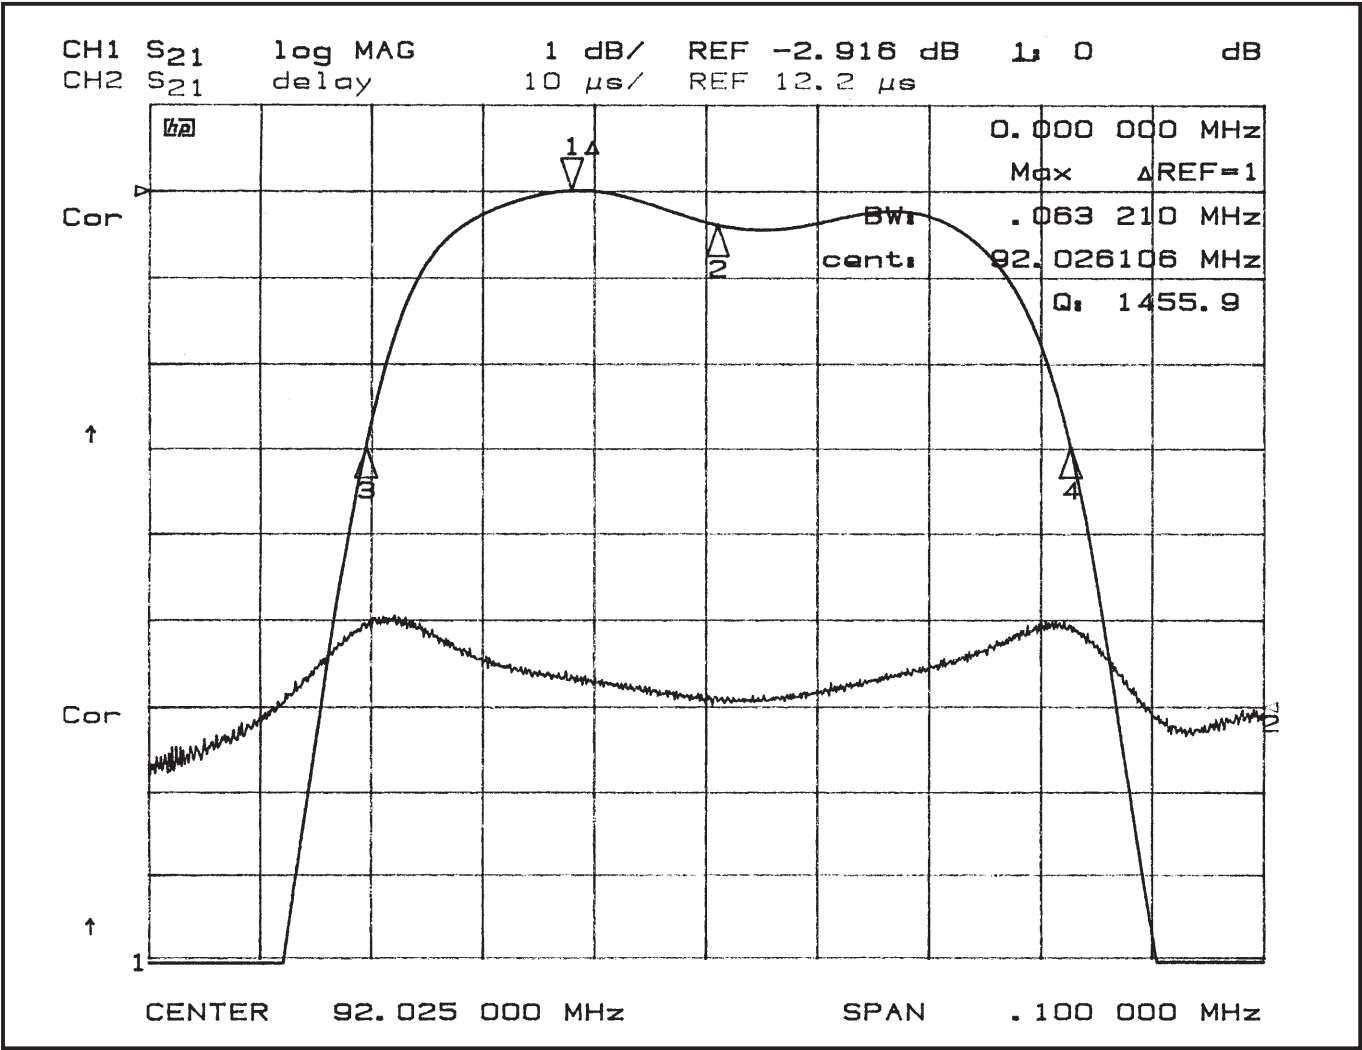



Figure 3: Passband and Group Delay Characteristics

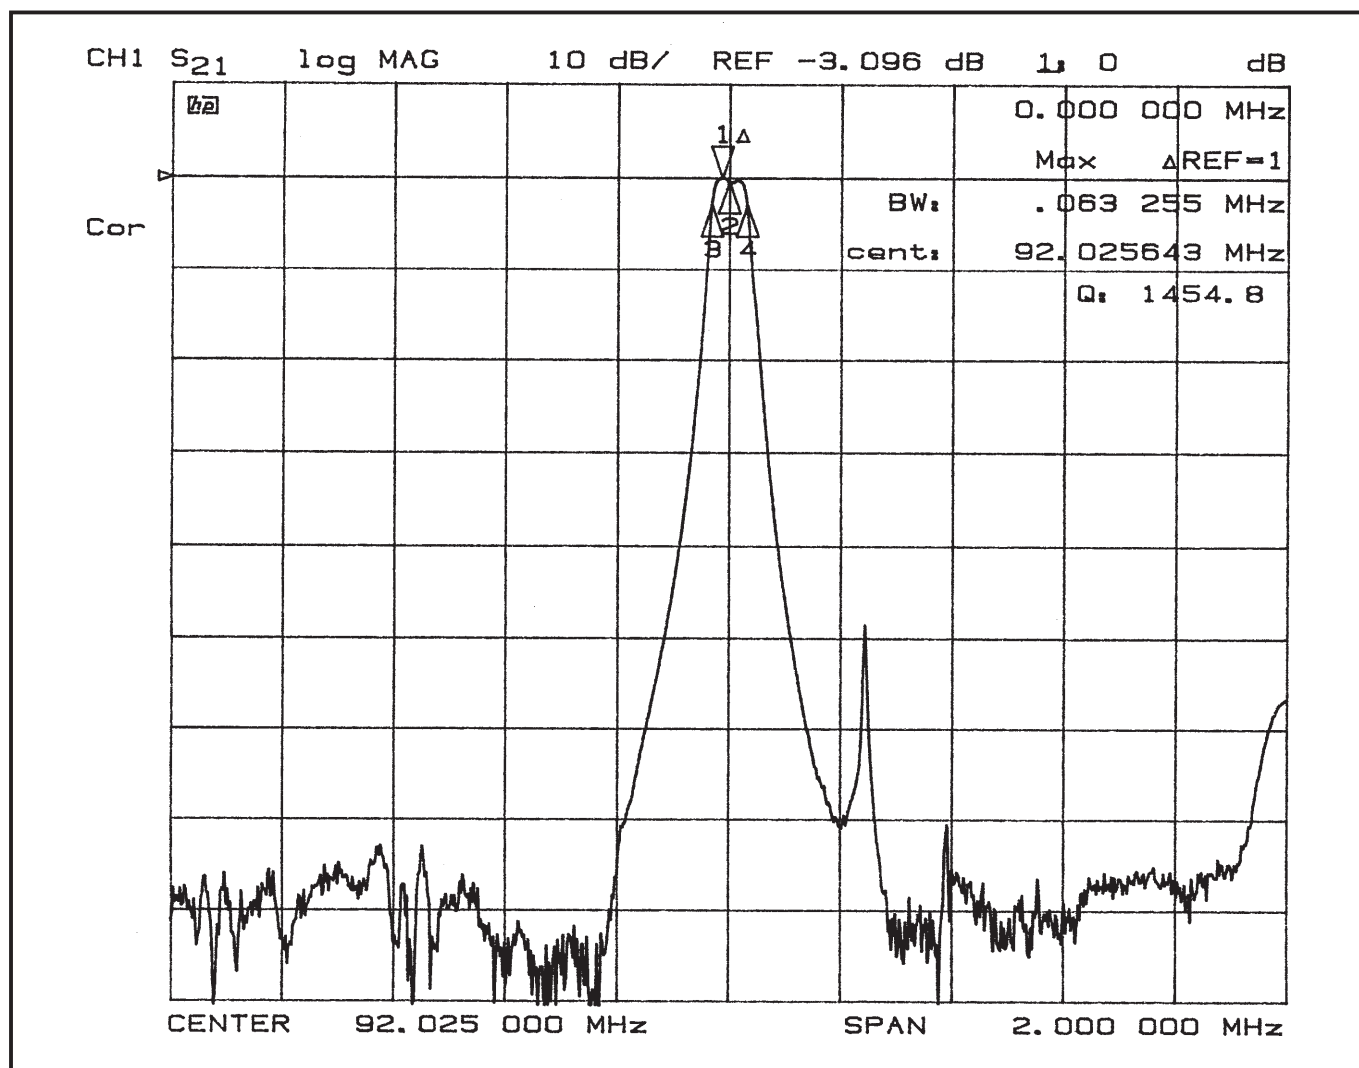

#### Figure 4: Stopband Rejection Characteristics

## PACKAGE DETAILS

Dimensions are shown thus: mm (in). For further package information, please contact your local Customer Service Centre.

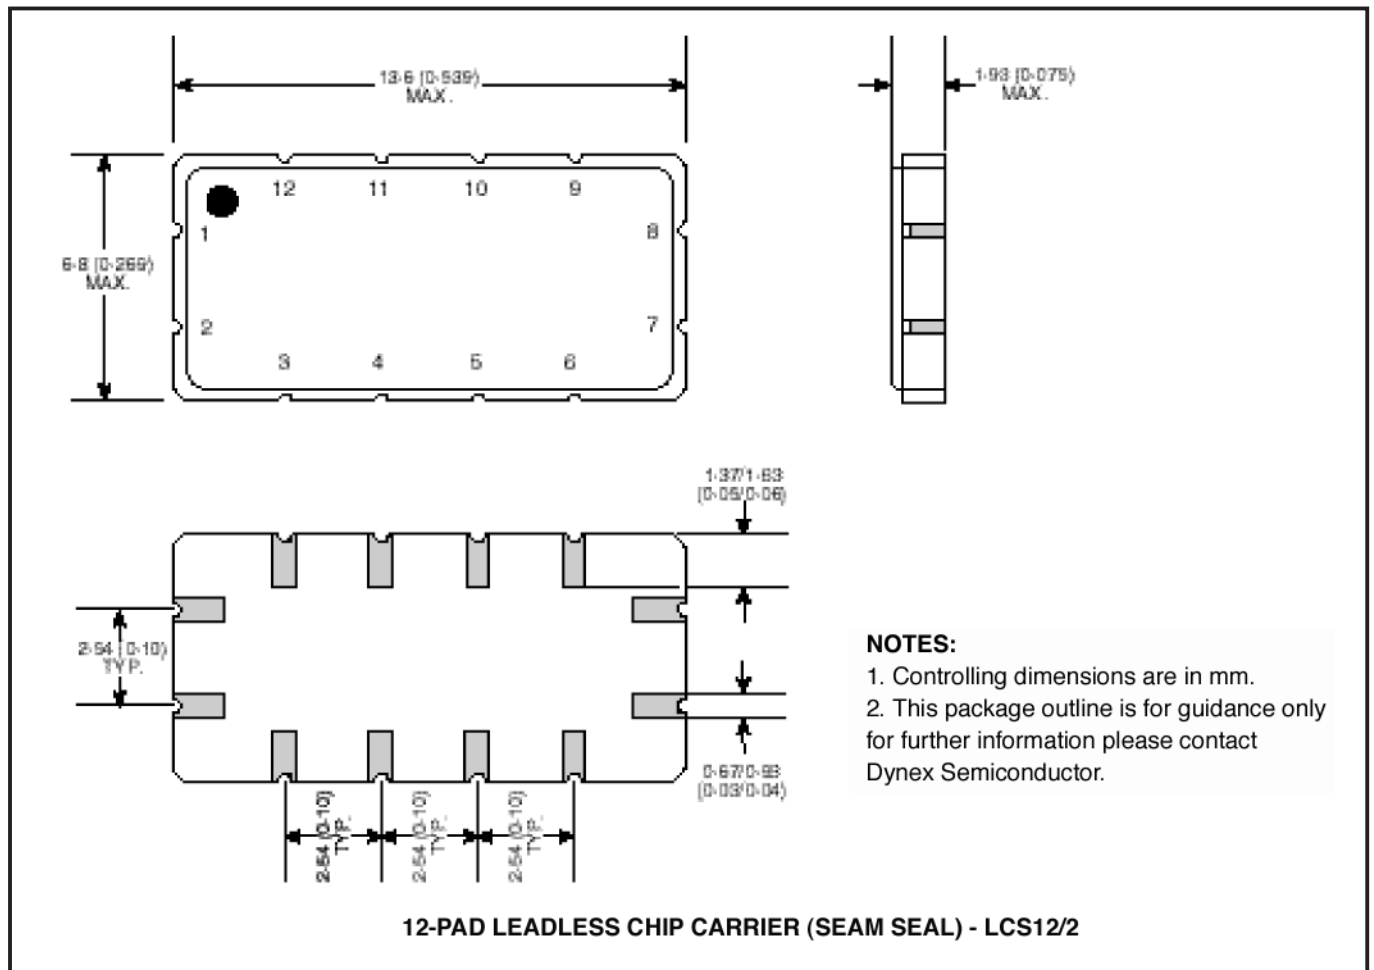

<http://www.dynexsemi.com>

e-mail: [power\\_solutions@dynexsemi.com](mailto:power_solutions@dynexsemi.com)

### HEADQUARTERS OPERATIONS

#### DYNEX SEMICONDUCTOR LTD

Doddington Road, Lincoln.  
Lincolnshire, LN6 3LF, United Kingdom.  
Tel: 00-44-(0)1522-500500  
Fax: 00-44-(0)1522-500550

#### DYNEX POWER INC.

Unit 7 - 58 Antares Drive,  
Nepean, Ontario, Canada K2E 7W6.  
Tel: 613.723.7035  
Fax: 613.723.1518  
Toll Free: 1.888.33.DYNEX (39639)

### CUSTOMER SERVICE CENTRES

**France, Benelux, Italy and Spain** Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50

**North America** Tel: 011-800-5554-5554. Fax: 011-800-5444-5444

**UK, Germany, Scandinavia & Rest Of World** Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020

### SALES OFFICES

**France, Benelux, Italy and Spain** Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50

**Germany** Tel: 07351 827723

**North America** Tel: (613) 723-7035. Fax: (613) 723-1518. Toll Free: 1.888.33.DYNEX (39639) /

Tel: (831) 440-1988. Fax: (831) 440-1989 / Tel: (949) 733-3005. Fax: (949) 733-2986.

**UK, Germany, Scandinavia & Rest Of World** Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020

These offices are supported by Representatives and Distributors in many countries world-wide.

© Dynex Semiconductor 2000 Publication No. DS4082-2 Issue No. 2.0 January 2000

TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

### Datasheet Annotations:

Dynex Semiconductor annotate datasheets in the top right hand corner of the front page, to indicate product status. The annotations are as follows:-

**Target Information:** This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

**Preliminary Information:** The product is in design and development. The datasheet represents the product as it is understood but details may change.

**Advance Information:** The product design is complete and final characterisation for volume production is well in hand.

**No Annotation:** The product parameters are fixed and the product is available to datasheet specification.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.