

D10002
SD10002

DSL Isolation Transformer

FEATURES


- For top-performance in ADSL modem line interfaces.
- Drop in replacement for EP13
- Total Harmonic Distortion rated -92.8dB, typ. between 30kHz-200kHz.
- Insertion Loss rated 0.4dB typ. @ 300kHz.
- Return Loss rated 20.2dB typ. @ 300kHz.
- Longitudinal Balance 71.6dB typ. between 30kHz-1.1 MHz.
- Complies with supplementary insulation for a 250 Vrms primary line circuit according to IEC60950.
- Lower profile (10.9 mm).
- Applicable for IC models:
ANALOG DEVICES: AD2msp910/912/918

PRODUCT COMPLIANCE


- UL/C- UL recognized file number:
- BABT certificate of recognition:
- Patent Pending

NOMENCLATURE (FIG. 1)

THT

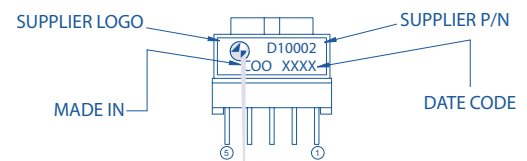


SMT

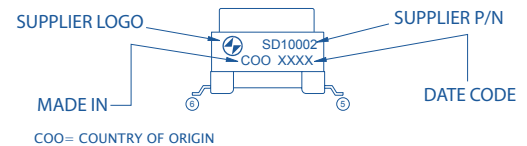


MECHANICAL DIMENSIONS (FIG. 2)


D10002

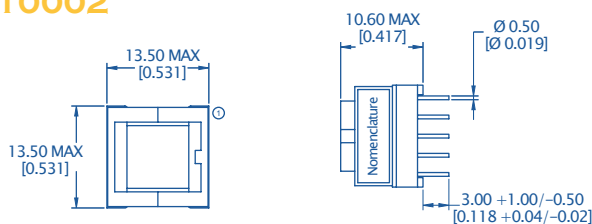

SD10002

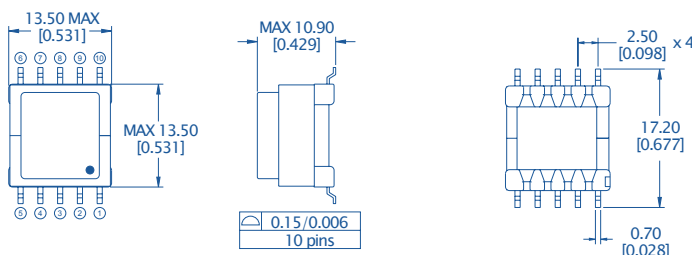

DIMENSIONS: $\frac{\text{mm}}{\text{inches}}$



Literature number: D10002 & SD10002 ©Copyright 2001, Sumida Corporation All rights reserved. Printed in U.S.A. 9/01

www.sumida.com

• North America

Tel. 1 847 545 6700
Fax. 1 847 545 6720

• Hong Kong

Tel. 852 2880 6688
Fax. 852 2565 9600

• Europe

Tel. 32 89 328850
Fax. 32 11 300890

• Singapore

Tel. 65 296 3388
Fax. 65 296 3390

• Taiwan

Tel. 886 2 2523 6368
Fax. 886 2 2523 6369

• Japan

Tel. 813 3980 2212
Fax. 813 3980 2213



DSL Isolation Transformer


ELECTRICAL PERFORMANCE SPECIFICATIONS

Performance	Conditions	Min	Typ	Max	Units
Impedance	Reflected on Primary with load on Secondary		100 100		Ω
Total Harmonic Distortion	5.3 Vrms, 30kHz–100kHz		–92.8	–80	dB
Insertion Loss	@ 300 kHz		0.4	0.5	dB
Return Loss	@ 300 kHz	16.5	20.2		dB
Dielectric Breakdown Isolation Production methods applied:	Safety Standard tested 1 min. HiPOT Voltage Duration Trip Leakage Current	1500 1875 2		200	Vrms Vrms Sec μ A
Frequency Response	30 kHz –1.1 MHz (Ref. 300kHz)		± 0.6	± 1.1	dB
Longitudinal Balance	30 kHz –1.1 MHz	40	71.6		dB
DC Resistance @ 20°C	Primary winding (R_{pri}) Secondary winding (R_{sec})		2.77 4.40	3.1 5.0	Ω
DC current in Primary			0		mADC
Turns Ratio	Primary to secondary; $\pm 1\%$		1:1		Turns
Inductance (L_p)	10 kHz, 0.1 VAC	4.25	5.0	5.75	mH
Leakage inductance (ΔL_{leak})	100 kHz, 0.1 VAC		9.98	18	μ H
Core Loss (R_p)	100 kHz, 0.1 VAC		196.2		k Ω
Interwinding Capacitance (C_{ww})	10 kHz, 0.1 VAC		30.22	50	pF
Operating temperature		–40		85	°C
Storage temperature		–40		100	°C

Electrical Performance Specifications (TA = 25°C unless otherwise specified)

- Spice model Schematic is available on the Sumida America Web site in application note AN1002.
- GRAPHS AVAILABLE UPON REQUEST

PACKAGING

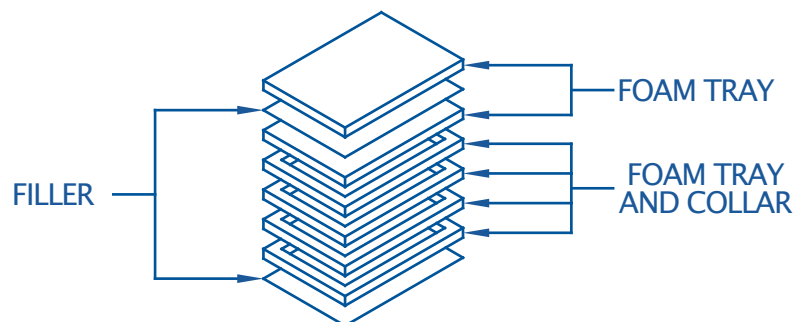

PACKAGING

Material	Contents	#Transformers
Tray	Transformer	50

Sumida assumes no liability as a result of the use of said specifications if patent or other industrial rights of third parties are infringed by reason of the use of products shown in the catalog unless otherwise agreed between parties. Sumida reserves the right to make changes to specifications without notice. Sumida does not authorize or warrant any Sumida device for use in life support devices and/or systems. Contact your nearest Sumida Sales Office for the latest specifications.

Literature number: D10002 & SD10002 ©Copyright 2001, Sumida Corporation All rights reserved. Printed in U.S.A. 9/01