


COMPLEMENTARY NPN/PNP PRE-BIASED SMALL SIGNAL SOT-563 DUAL SURFACE MOUNT TRANSISTOR

Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Lead-Free Device


Mechanical Data

- Case: SOT-563, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Finish - Matte Tin Solderable per MIL-STD-202, Method 208 (Note 1)
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approx.)

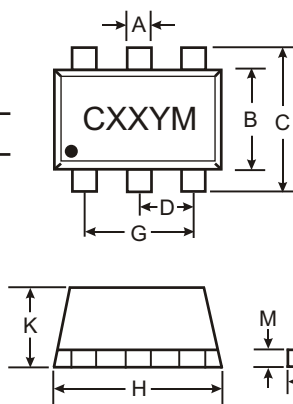

SOT-563			
Dim	Min	Max	Typ
A	0.15	0.30	0.25
B	1.10	1.25	1.20
C	1.55	1.70	1.60
D	0.50		
G	0.90	1.10	1.00
H	1.50	1.70	1.60
K	0.56	0.60	0.60
L	0.15	0.25	0.20
M	0.10	0.18	0.11
All Dimensions in mm			

P/N	R1 (NOM)	R2 (NOM)	MARKING
DCX122LH	0.22K Ω	10K Ω	C81
DCX142JH	0.47K Ω	10K Ω	C82
DCX122TH	0.22K Ω	OPEN	C83
DCX142TH	0.47K Ω	OPEN	C84

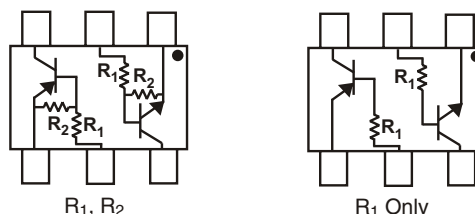

SCHEMATIC DIAGRAM, TOP VIEW

Maximum Ratings NPN Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	50	V
Input Voltage	V_{IN}	-5 to +6	V
Input Voltage	$V_{EBO} \text{ (MAX)}$	5	V
Output Current	I_C	100	mA
Power Dissipation (Note 2, 3)	P_d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 2)	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Operating and Storage and Temperature Range	T_j, T_{STG}	-55 to +150	$^\circ\text{C}$

- Note:
1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
 2. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. NPN Section, PNP Section, or maximum combined.

Maximum Ratings PNP Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	-50	V
Input Voltage	DCX122LH DCX142JH V_{IN}	+5 to -6 +5 to -6	V
Input Voltage	DCX122TH DCX142TH $V_{EBO} \text{ (MAX)}$	-5	V
Output Current	All I_C	-100	mA
Power Dissipation (Note 2, 3)	P_d	150	mW
Thermal Resistance, Junction to Ambient Air (Note 2)	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Operating and Storage and Temperature Range	T_j, T_{STG}	-55 to +150	$^\circ\text{C}$

Note: 1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.
 2. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. NPN Section, PNP Section, or maximum combined.

Electrical Characteristics NPN Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified **R1, R2 Types**

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DCX122LH DCX142JH $V_{I(off)}$	0.3	—	—	V	$V_{CC} = 5V, I_O = 100\mu A$
	DCX122LH DCX142JH $V_{I(on)}$	—	—	2.0 2.0	V	$V_O = 0.3V, I_O = 20mA$ $V_O = 0.3V, I_O = 20mA$
Output Voltage	$V_{O(on)}$	—	—	0.3V	V	$I_O/I_I = 5mA/0.25mA$
Input Current	DCX122LH DCX142JH I_I	—	—	28 13	mA	$V_I = 5V$
Output Current	$I_{O(off)}$	—	—	0.5	μA	$V_{CC} = 50V, V_I = 0V$
DC Current Gain	DDCX122LH DDCX142JH G_I	56 56	—	—	—	$V_O = 5V, I_O = 10mA$
Gain-Bandwidth Product*	f_T	—	200	—	MHz	$V_{CE} = 10V, I_E = 5mA,$ $f = 100MHz$

* Transistor - For Reference Only

Electrical Characteristics NPN Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified **R1-Only**

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	50	—	—	V	$I_C = 50\mu A$
Collector-Emitter Breakdown Voltage	BV_{CEO}	40	—	—	V	$I_C = 1mA$
Emitter-Base Breakdown Voltage	DCX122TH DCX142TH BV_{EBO}	5	—	—	V	$I_E = 50\mu A$ $I_E = 50\mu A$
Collector Cutoff Current	I_{CBO}	—	—	0.5	μA	$V_{CB} = 50V$
Emitter Cutoff Current	DCX122TH DCX142TH I_{EBO}	—	—	0.5 0.5	μA	$V_{EB} = 4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	0.3	V	$I_C = 5mA, I_B = 0.25mA$
DC Current Transfer Ratio	DCX122TH DCX142TH h_{FE}	100 100	250 250	600 600	—	$I_C = 1mA, V_{CE} = 5V$
Gain-Bandwidth Product*	f_T	—	200	—	MHz	$V_{CE} = 10V, I_E = -5mA,$ $f = 100MHz$

* Transistor - For Reference Only

Electrical Characteristics PNP Section @ $T_A = 25^\circ\text{C}$ unless otherwise specified R1, R2 Types

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DCX122LH DCX142JH	$V_{I(off)}$	-0.3 -0.3	—	—	V	$V_{CC} = -5V, I_O = -100\mu A$
	DCX122LH DCX142JH	$V_{I(on)}$	—	—	-2.0 -2.0	V	$V_O = -0.3V, I_O = -20mA$ $V_O = -0.3V, I_O = -20mA$
Output Voltage		$V_{O(on)}$	—	—	-0.3V	V	$I_O/I_I = -5mA/-0.25mA$
Input Current	DCX122LH DCX142JH	I_I	—	—	-28 -13	mA	$V_I = -5V$
Output Current		$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = -50V, V_I = 0V$
DC Current Gain	DCX122LH DCX142JH	G_I	56 56	—	—	—	$V_O = -5V, I_O = -10mA$
Gain-Bandwidth Product*		f_T	—	200	—	MHz	$V_{CE} = -10V, I_E = -5mA,$ $f = 100MHz$

* Transistor - For Reference Only

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified R1-Only Types

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage		BV_{CBO}	-50	—	—	V	$I_C = -50\mu A$
Collector-Emitter Breakdown Voltage		BV_{CEO}	-40	—	—	V	$I_C = -1mA$
Emitter-Base Breakdown Voltage	DCX122TH DCX142TH	BV_{EBO}	-5	—	—	V	$I_E = -50\mu A$ $I_E = -50\mu A$
Collector Cutoff Current		I_{CBO}	—	—	-0.5	μA	$V_{CB} = -50V$
Emitter Cutoff Current	DCX122TH DCX142TH	I_{EBO}	— —	—	-0.5 -0.5	μA	$V_{EB} = -4V$
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	—	—	-0.3	V	$I_C = -5mA, I_B = -0.25mA$
DC Current Transfer Ratio	DCX122TH DCX142TH	h_{FE}	100 100	250 250	600 600	—	$I_C = -1mA, V_{CE} = -5V$
Gain-Bandwidth Product*		f_T	—	200	—	MHz	$V_{CE} = -10V, I_E = 5mA,$ $f = 100MHz$


* Transistor - For Reference Only

Ordering Information (Note 4)

Device	Packaging	Shipping
DCX122LH-7	SOT-563	3000/Tape & Reel
DCX142JH-7	SOT-563	3000/Tape & Reel
DCX122TH-7	SOT-563	3000/Tape & Reel
DCX142TH-7	SOT-563	3000/Tape & Reel

Notes: 1. If lead-bearing terminal plating is required, please contact your Diodes Inc. sales representative for availability and minimum order details.

4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information


CXX = Product Type Marking Code (See Page 1)
YM = Date Code Marking
Y = Year ex: P = 2003
M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

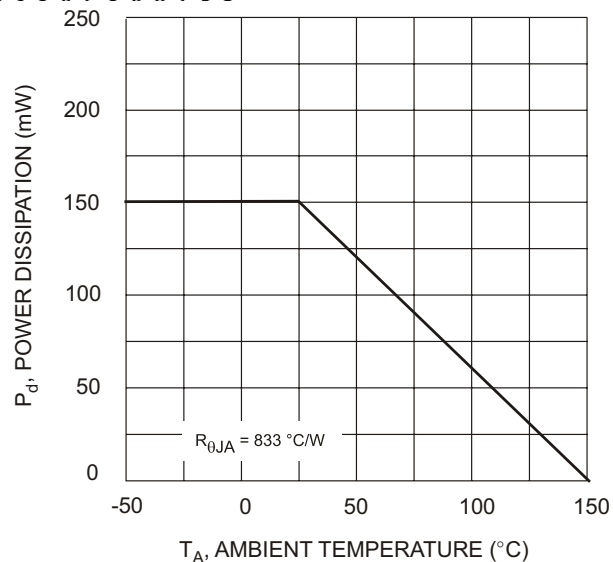


Fig. 1 Derating Curve - Total