





European Power-Semiconductor and Electronics Company

Marketing Information

DD 400 S 16 K4

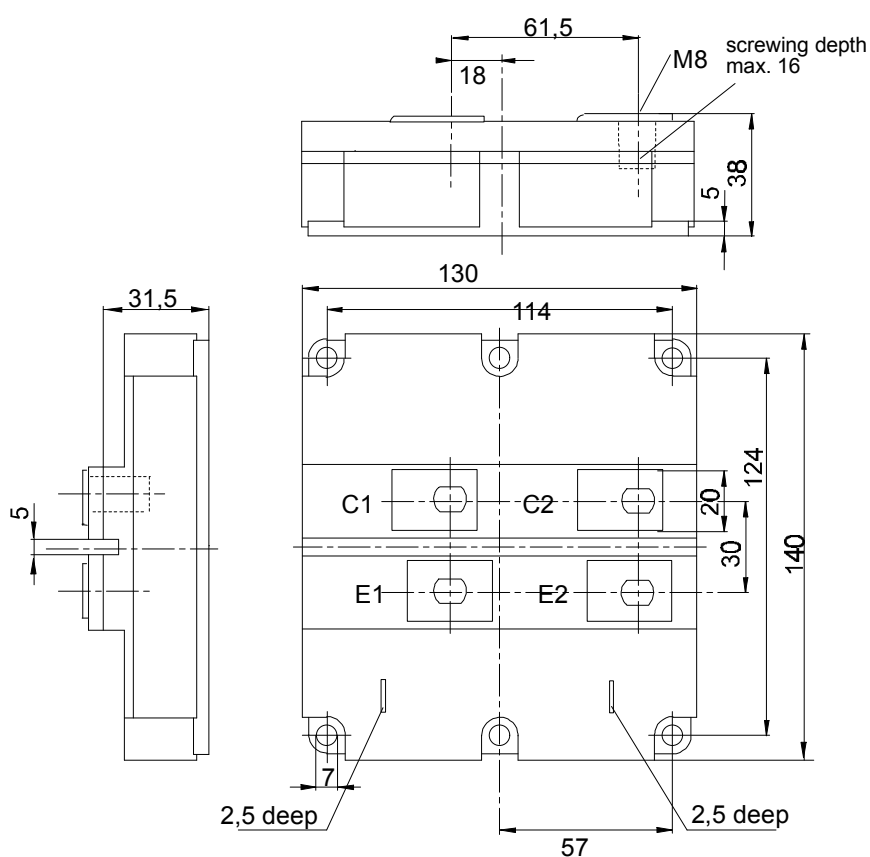

DD 400 S 16 K4

Elektrische Eigenschaften	Electrical properties					
Höchstzulässige Werte	Maximum rated values					
Periodische Spitzensperrspannung	repetitive peak reverse voltage	$t_{vj} = 25^{\circ}\text{C}$	V_{RRM}	1600	V	
Dauergleichstrom	DC forward current		I_F	400	A	
Periodischer Spitzenstrom	repetitive peak forward current	$t_p = 1 \text{ ms}$	I_{FRM}	800	A	
Isolations-Prüfspannung	insulation test voltage	RMS, f=50 Hz, t=1 min.	V_{ISOL}	3,4	kV	
Charakteristische Werte	Characteristic values			min.	typ.	max.
Durchlaßspannung	forward voltage	$t_{vj} = 25^{\circ}\text{C}, i_F = 400 \text{ A}$	V_F	-	2,4	2,8 V
		$t_{vj} = 125^{\circ}\text{C}, i_F = 400 \text{ A}$		-	2,2	- V
Sperrstrom	reverse current	$V_{CE} = 1200 \text{ V}, t_{vj} = 25^{\circ}\text{C}$	i_R	-	4	- mA
		$V_{CE} = 1200 \text{ V}, t_{vj} = 125^{\circ}\text{C}$		-	15	- mA
Rückstromspitze	peak reverse recovery current	$i_F=400 \text{ A}, -di_F/dt=400 \text{ A}/\mu\text{s}$	I_{RM}			
		$V_{RM} = 900\text{V}, t_{vj} = 25^{\circ}\text{C}$		-	35	- A
		$V_{RM} = 900\text{V}, t_{vj} = 125^{\circ}\text{C}$		-	65	- A
Sperrverzögerungsladung	recovered charge	$i_F=400 \text{ A}, -di_F/dt=400 \text{ A}/\mu\text{s}$	Q_r			
		$V_{RM} = 900\text{V}, t_{vj} = 25^{\circ}\text{C}$		-	10	- μAs
		$V_{RM} = 900\text{V}, t_{vj} = 125^{\circ}\text{C}$		-	40	- μAs
Thermische Eigenschaften	Thermal properties					
Innerer Wärmewiderstand	thermal resistance, junction to case	pro Modul/per module, DC	R_{thJC}		0,05	$^{\circ}\text{C}/\text{W}$
		pro Zweig/per arm, DC			0,10	$^{\circ}\text{C}/\text{W}$
Übergangs-Wärmewiderstand	thermal resistance, case to heatsink	pro Modul/per module	R_{thCK}		typ. 0,01	$^{\circ}\text{C}/\text{W}$
		pro Zweig/per arm			typ. 0,02	$^{\circ}\text{C}/\text{W}$
Höchstzul.Sperrschichttemperatur	max. junction temperature		$t_{vj \text{ max}}$		150	$^{\circ}\text{C}$
Betriebstemperatur	operating temperature		$t_{c \text{ op}}$		-40...+125	$^{\circ}\text{C}$
Lagertemperatur	storage temperature		t_{stg}		-40...+125	$^{\circ}\text{C}$
Mechanische Eigenschaften	Mechanical properties					
Innere Isolation	internal insulation				Al_2O_3	
Anzugsdrehmoment für mechanische Befestigung	mounting torque		M1		3	Nm
Anzugsdrehmoment für elektrische Anschlüsse	terminal connection torque	terminals M8	M2		8...10	Nm
Gewicht	weight		G		ca. 1500	g

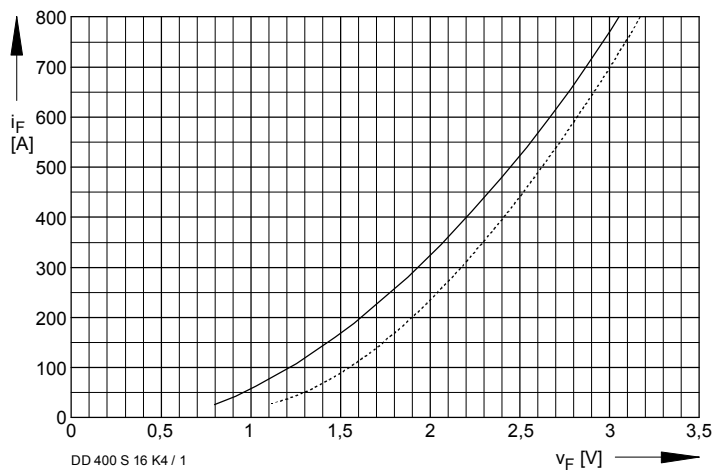


Bild / Fig. 1
 Durchlaßkennlinie pro Zweig (typisch)
 Forward characteristic per arm (typical)
 ----- $t_{vj} = 25^\circ\text{C}$
 ————— $t_{vj} = 125^\circ\text{C}$

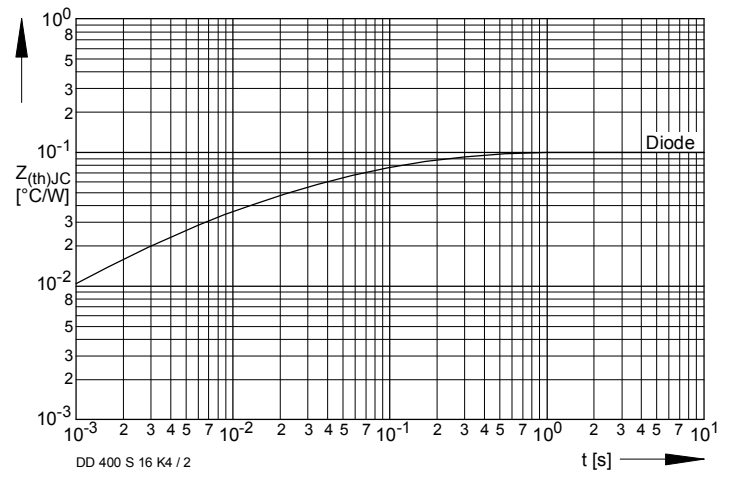


Bild / Fig. 2
 Transienter innerer Wärmewiderstand pro Zweig (DC)
 Transient thermal impedance per arm (DC)

Terms & Conditions of Usage

Attention

The present product data is exclusively subscribed to technically experienced staff. This Data Sheet is describing the specification of the products for which a warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications. Changes to the Data Sheet are reserved.

You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. Should you require product information in excess of the data given in the Data Sheet, please contact your local Sales Office via "www.eupec.com / sales & contact".

Warning

Due to technical requirements the products may contain dangerous substances. For information on the types in question please contact your local Sales Office via "www.eupec.com / sales & contact".