



**LIGHT SOURCE**

**MODEL NO: EL-8309-24**

Device Number: DOL-309-005 REV: 1.1

ECN: \_\_\_\_\_ Page: 1/4

**■Features**

- Excellent characters & appearances
- Low power requirements
- Mechanically and spectrally matched to the 40 pcs of LED
- High reliability & long life

**■Descriptions**

The product is assembled with lens and a row of AlGaAs/GaAs red LED mounted on PC board. The length of connector consisted of RED/BLACK(+/-) wires is 40mm. The output of emitting light is a uniformity line light source.

The product gets excellent light output operated at 24V and suitable as a light source of Facsimile and Image scanner.

**■Applications**

- Facsimile
- Image scanner

Office: NO 25,Lane.76, Chung Yang Rd., Sec.3, Tucheng, Taipei 236, Taiwan, R.O.C.

TEL: 886-2-2267-2000,2267-9936(22Lines)

FAX: 886-2-2267-6189


http: //www.everlight.com



LIGHT SOURCE  
MODEL NO: EL-8309-24

Device Number: DOL-309-005 REV: 1.1  
ECN: \_\_\_\_\_ Page: 2/4

■ Package Dimension:

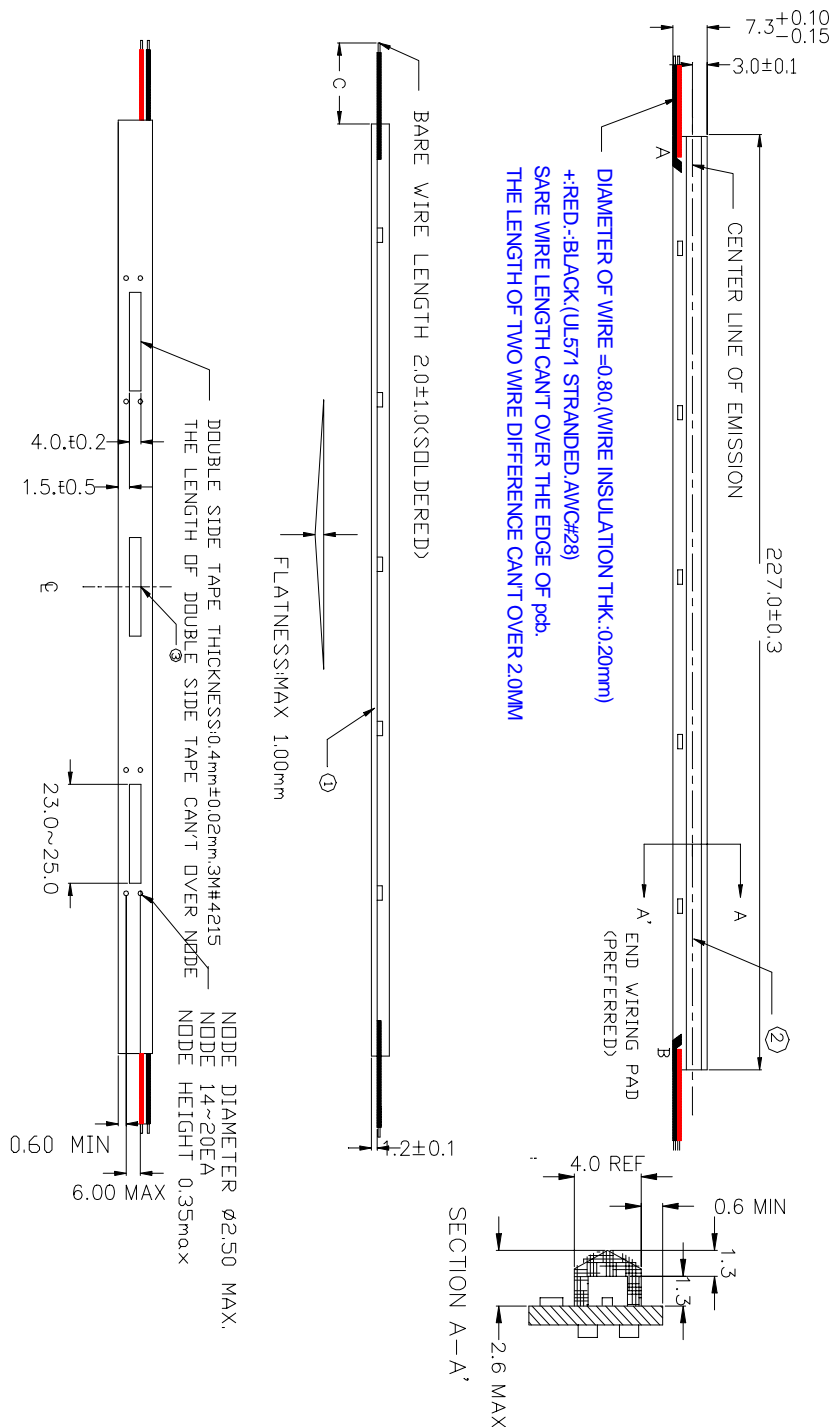

NOTE:  
THE RESISTOR TO THE EDGE OF PCB DISTANCE MINIMUM:  $0.2$  mm

UNIT: mm



## LIGHT SOURCE

MODEL NO: EL-8309-24Device Number: DOL-309-005 REV: 1.1ECN: \_\_\_\_\_ Page: 3/4

## ■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Power dissipation	$P_O$	2.5	W
Forward current	$I_F$	85	mA
Reverse voltage	$V_R$	32	V
Operating temperature	$T_{OPR}$	0~+50	°C
Storage temperature	$T_{STG}$	-25~+75	°C

## ■ Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Forward current	$V_{DD}$	$V_{DD}=24V$	--	--	85	mA
Reverse current	$I_F$	$V_R=32V$	--	--	100	$\mu A$
Illuminance	$L_{up}$	$V_{DD}=24V$	700	900	1400	Lux
Effective light length	L	$V_{DD}=24V$	216	--	--	mm
Uniformity	$U_P$	$V_{DD}=24V$	--	--	15	%
Effective Illuminated	$\Delta L$	$V_{DD}=24V$	--	4	--	mm
Peak emission wavelength	$\lambda_P$	$V_{DD}=24V$	--	570	--	nm
Spectral line half width	$\Delta \lambda$	$V_{DD}=24V$	--	30	--	nm




**LIGHT SOURCE**

**MODEL NO: EL-8309-24**


Device Number: DOL-309-005 REV: 1.1

ECN: \_\_\_\_\_ Page: 4/4


● **Attach height**

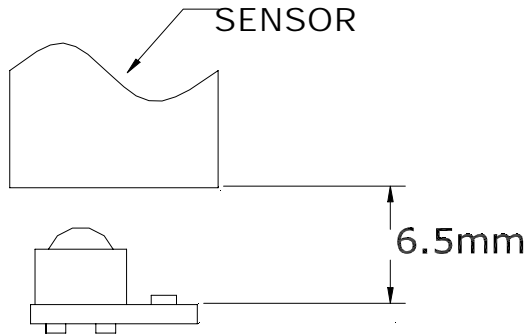


● **Effective illuminated half width**

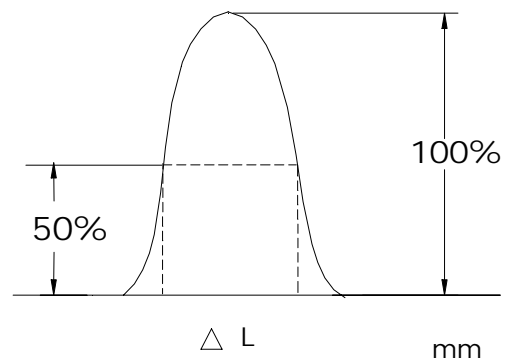

● **Uniformity**

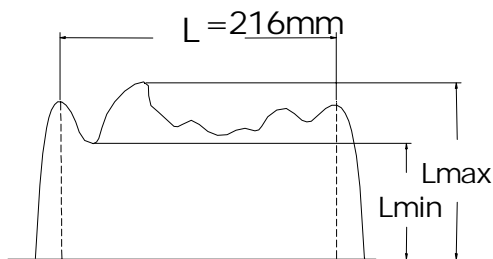

■ **Circuit diagram:**

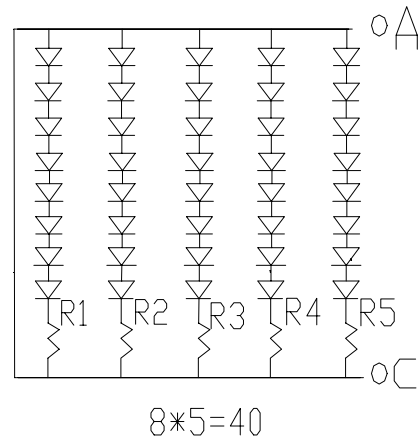

$$u_p = \frac{L_{max} - L_{min}}{L_{max} + L_{min}} * 100\%$$