



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDb-100-029 REV: 1.1

10 Bar Graph Displays

MODEL NO : ELB-1001EWA ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELB-1001 series are ten-element bar graph displays. Design for viewing distances up to 7 meters.
- There are separate anodes and cathodes for each light segment and choice of five colors is offered.
- These device is made with white segments and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELB-1001EWA	GaAsP/GaP	Orange	****

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



10 Bar Graph Displays


MODEL NO : ELB-1001EWA

ECN :

Page:

2/5

Package Dimensions:

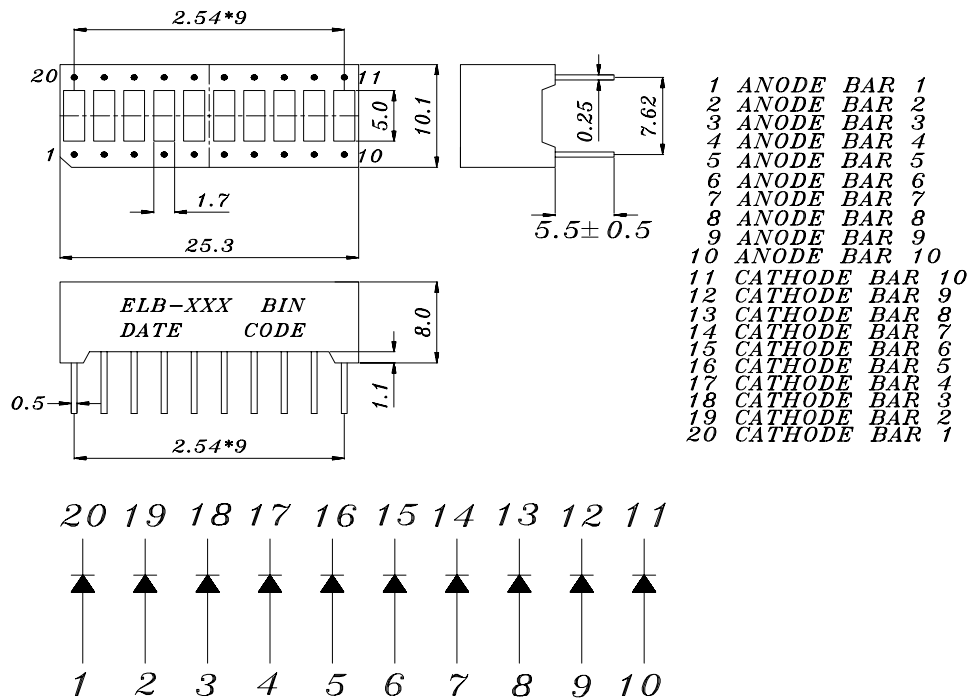

NOTES:

1.All dimensions are in millimeters tolerance is 0.25mm unless otherwise noted.

2.Above specification may be changed without notice.

Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-100-029 REV: 1.1

10 Bar Graph Displays

MODEL NO : ELB-1001EWA ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25℃ :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-40 to +85	℃
Storage Temperature	Tstg	-40 to +100	℃
Soldering Temperature	Tsol	260 ± 5	℃
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	1.4	2.8	----	mcd	If=10mA
Peak Wavelength	λ p	----	635	----	nm	If=20mA
Dominant Wavelength	λ d	----	625	----	nm	If=20mA
Spectrum Radiation Bandwidth	△ λ	----	45	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-100-029 REV: 1.1

10 Bar Graph Displays

MODEL NO : ELB-1001EWA ECN : Page: 4/5

■ Reliability test item and condition:					
NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-100-029

REV: 1.1

10 Bar Graph Displays

MODEL NO: ELB-1001EWA

ECN:

Page: 5/5

■ Typical Electro-Optical Characteristic Curves:

E

