



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELB-1010 series is 12.7*6.35mm light bar display. Design for viewing distances up to 7 meters.
- There are separate anodes and cathodes for each light segment and choice of five colors is offered.
- These device are available with yellow offering a wide possibility in design.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELB-1010YD	GaAsP/GaP	Yellow	*****

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306


<http://www.everlight.com>



12.7*6.35mm Light Bars

MODEL NO : ELB-1010YDECN : Page: 2/5

■ Package Dimensions:

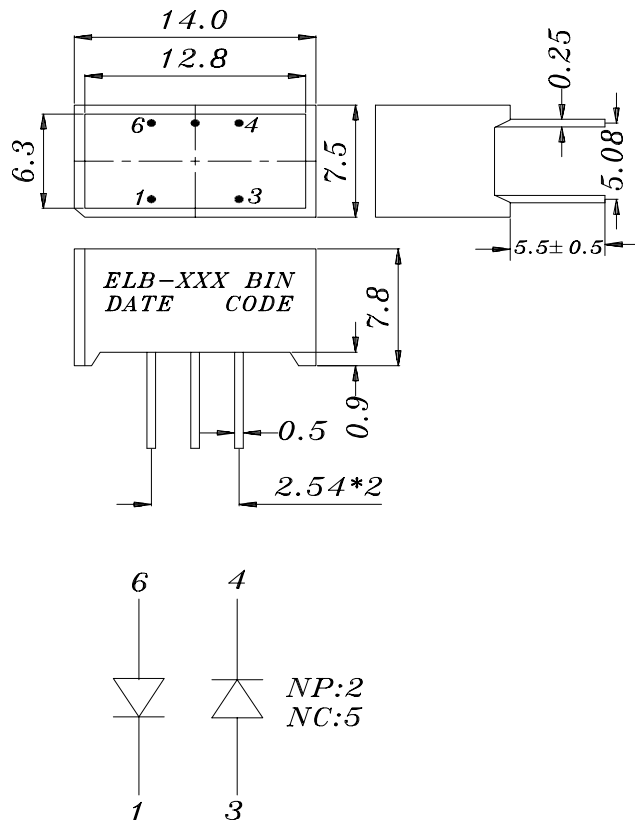

■ NOTES:

1.All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.

2.Above specification may be changed without notice.

Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	TsTg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	85	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	2.4	3.7	----	mcd	If=10mA
Peak Wavelength	λ_p	----	585	----	nm	If=20mA
Dominant Wavelength	λ_d	----	590	----	nm	If=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$	----	35	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	V	Vr=5V






EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDB-101-002 REV: 1.1

12.7*6.35mm Light Bars

MODEL NO: ELB-1010YD ECN : Page: 4/5

■ Typical Electro-Optical Characteristic Curves:

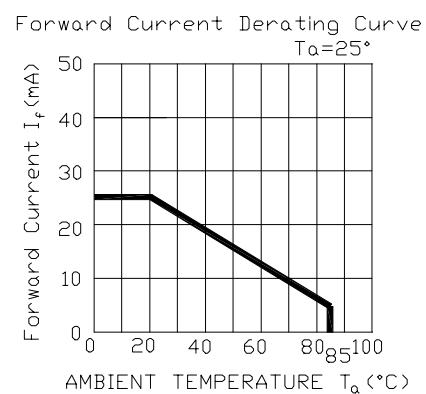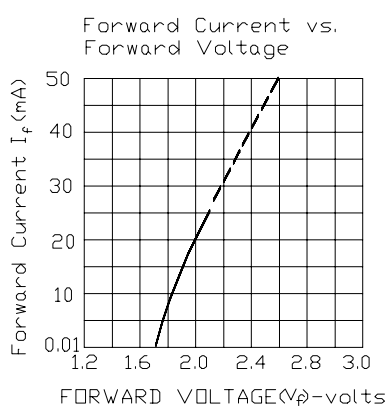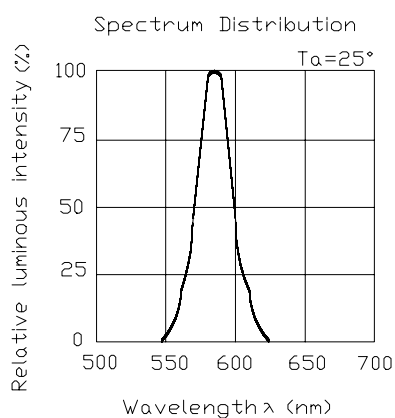



12.7*6.35mm Light Bars

MODEL NO : ELB-1010YD ECN : Page: 5/5

Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ┆ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ┆ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1