

Cooler less small form factor EDFA (Dual 1480nm pumped L-band version)

Product type: ErFA2450



Applications

- Single channel amplification in L-band WDM network
 - Booster amplifier
 - Preamplifier
- Loss compensation
- Metro Network transmission

Description

- ErFA2450 has been designed for a wide variety of single channel L-band applications of EDFA .
- Miniature Small (123mm x 79mm x10mm with 2pump) onboard mountable package.
- Simple cooler-less coaxial 1480nm pumped configuration.
- Input and output monitor is implemented on request.
- Input and output isolator is equipped on request.

Features

- Saturated output power $> +10\text{dBm}$ (Dual pumped version)
- Nominal output power $> +3\text{dBm}$
- Noise figure $< +5.7\text{dB}$
- Cooler free operation up to $+65^{\circ}\text{C}$ ambient temp

Block diagram


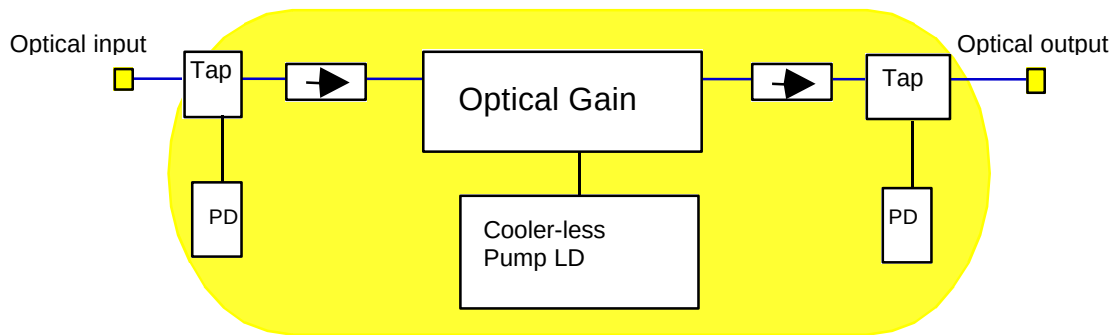


Figure. ErFA2450 EDFA Block Diagram

Outline Drawings

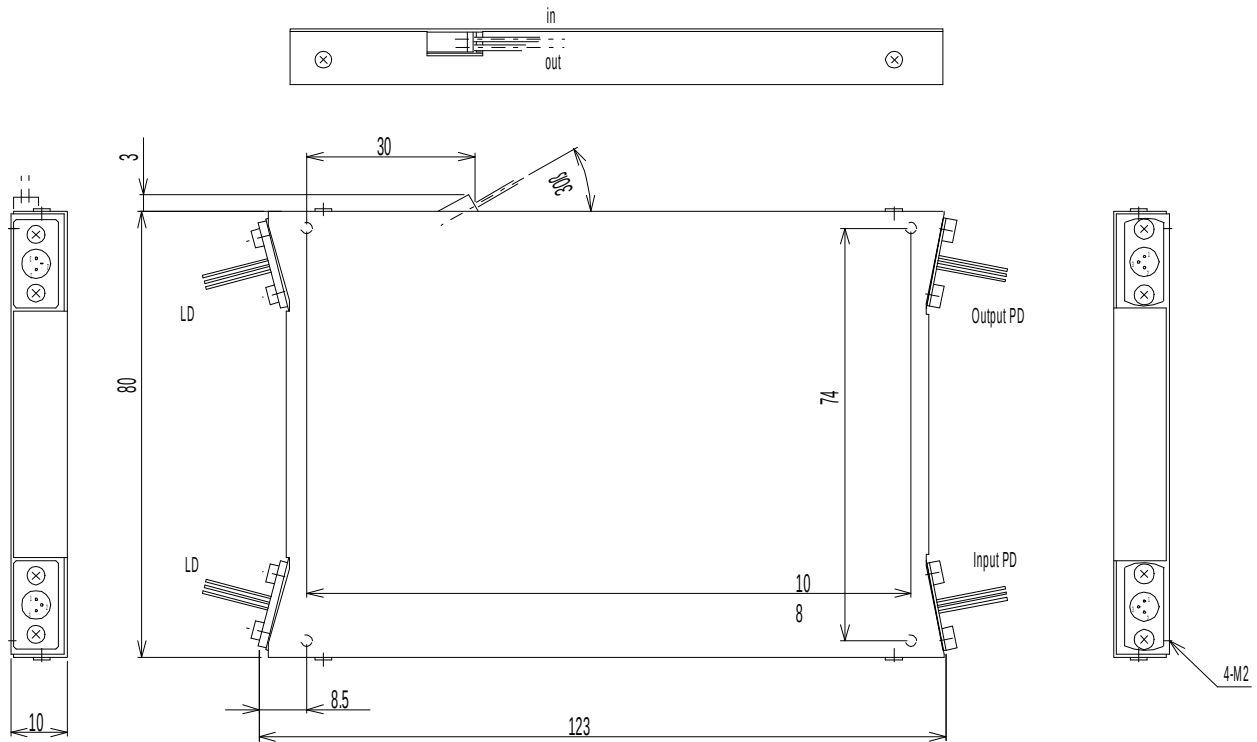

Electrical pin configuration

Device	Pin No.	Description
Pump LD	1	Laser Cathode (-)
	2	Laser Anode (+), Backfacet PD Cathode(+)
	3	Backfacet PD Anode(-)
Input monitor PD	1	PD Anode (-)
	2	PD Cathode (+)
	3	PD case
Output monitor PD	1	PD Anode (-)
	2	PD Cathode (+)
	3	PD case

Environmental conditions

Parameter	Unit	Min	Typ	Max	Remarks
Storage Temperature	°C	-40		70	
Operating Humidity	%RH	10		80	No dew condensation
Storage Humidity	%RH	10		90	No dew condensation
Operating Temperature	°C	0		65	

Absolute maximum ratings

Item	Symbol	Condition	Value limit	Unit
Laser forward current	I_P		400	mA
Laser reverse voltage	$V_{F,P}$		2	V
Monitor photodiode forward current	$I_{F,M}$		5	mA
Monitor photodiode reverse voltage	$V_{R,M}$		20	V
Forward voltage of input signal monitor diode	$V_{F,M,IN}$		0	V
Forward voltage of output signal monitor diode	$V_{F,M,OUT}$		0	V
Reverse voltage of input signal monitor diode	$V_{R,M,IN}$		15	V
Reverse voltage of output signal monitor diode	$V_{R,M,OUT}$		15	V

Electrical Characteristics

Item	Symbol	Conditions	Min	Max	Unit
Pump laser diode current (BOL)	I_{P0}	Over whole operating conditions $-5^{\circ}\text{C} \leq T_{op} \leq 65^{\circ}\text{C}$	-	200	mA
Relative change of pump laser diode current from BOL to EOL	$\Delta I_P / I_{P0}$			20	%
Pump laser diode forward voltage	V_P		-	2.2	V
Pump monitor PD dark current	I_{MD}	$I_P = 0\text{mA}$, $U_{\text{reverse}} = 3.0\text{ V}$	-	100	nA
Pump monitor PD current	I_M	$I_P = I_{P0}$ Not applicable for EDFA power control.	50	4000	μA
Pump monitor PD reverse voltage	U_{MR}		0	10	V

Optical Characteristics

Item	Symbol	Conditions	Min	Typ	Max	Unit
Amplification wavelength	λ	Single channel operation	1570		1605	nm
Input signal power	P_{IN}		-35		0	dBm
Saturated output power	$P_{\text{Sat,Out}}$	$1570\text{nm} \leq \lambda \leq 1605\text{nm}$ $P_{IN} = 0\text{dBm}$	+10	+12		dBm
Nominal output power	$P_{\text{Nom,Out}}$	$1570\text{nm} \leq \lambda \leq 1605\text{nm}$ $P_{IN} = -10\text{dBm}$	+4	+5		dBm
Small signal gain	G	$1570\text{nm} \leq \lambda \leq 1605\text{nm}$ $P_{IN} = -35\text{dBm}$	16	20		dBm
Noise figure	NF	$1570\text{nm} \leq \lambda \leq 1605\text{nm}$ $P_{IN} = -10\text{dBm}$ Excluding input isolator	-	5.5	6.2	dB

Typical performance

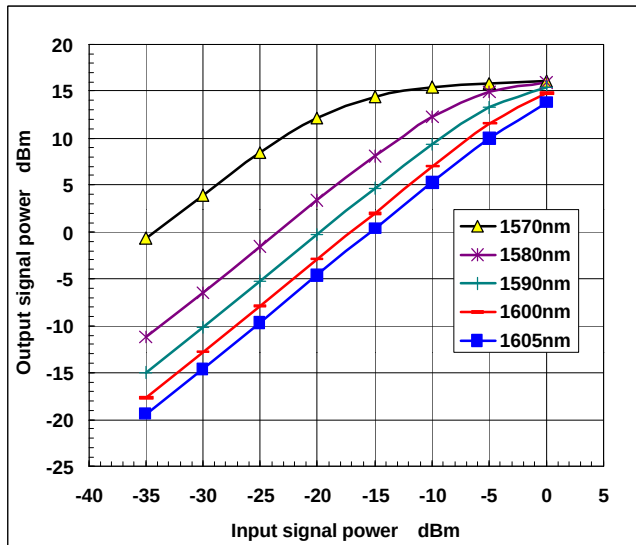


Figure. Output power against input power

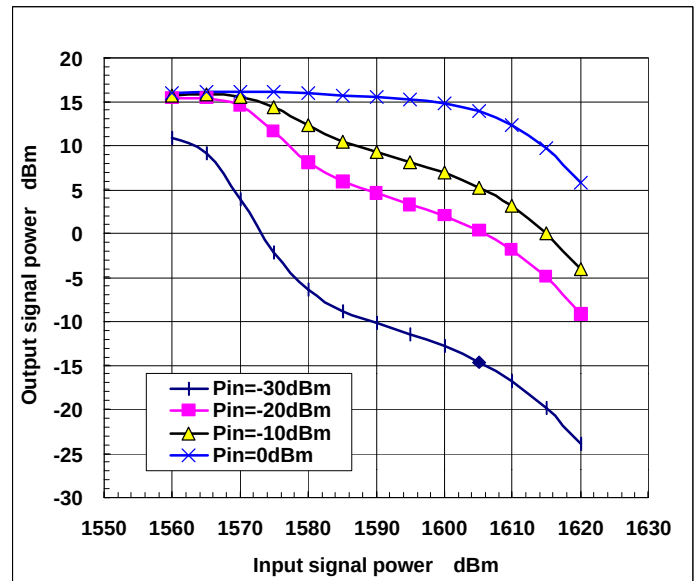


Figure. Output power against input signal wavelength

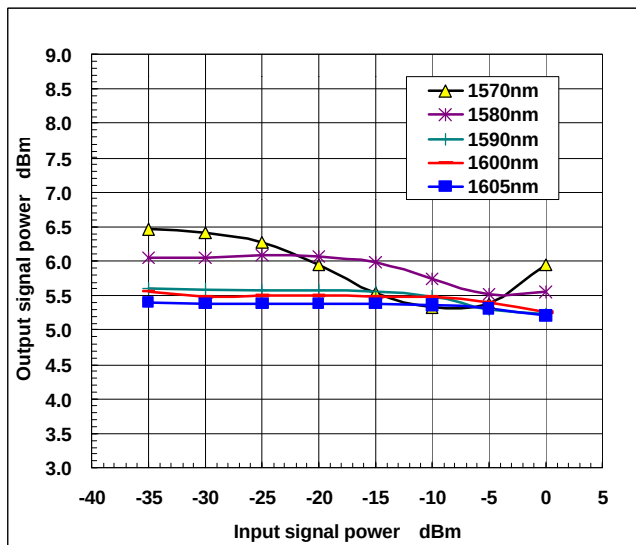


Figure. Noise figure against input power;

Ordering information

ErFA2450 -X X -Y Y



Isolator and monitor indicator

FRM Input / Output isolator, Input / Output monitor
R Output isolator, Output monitor
FR Input / Output isolator, Output monitor

Optical connector indicator

FA FC Angled PC
FS FC super PC
SA SC Angled PC
SS SC super PC

Fitel Technologies, Inc. reserves the right to change data contained in this document in the interest of continued product improvement. The publication of this information by FTI does not imply freedom from patent or any other rights of Fitel Technologies, Inc.



Perryville Corporate Park
Perryville III
Clinton, NJ 08809
T: 908-713-3525
F: 908-713-3515
www.fiteltech.com
sales@fiteltech.com