

64-Bit PCI Bus Target Megafunction

Solution Brief 37

June 1998, ver. 1

Target Applications:

Bus Interfaces
Bus Migration
Digital Signal Processing (DSP)
High-Speed Communications

Family:

FLEX 10K & FLEX 6000

Vendor:



PLD Applications
14 Rue Soleillet
75971 Paris Cedex 20
France
Tel. (33) 01-40-33-79-98
Fax (33) 01-43-58-14-15
E-mail plda@worldnet.fr
<http://www.plda.com>

Features

- 64-bit, 33-MHz peripheral component interconnect (PCI) function
- Fully compliant with PCI Special Interest Group (PCI-SIG) **PCI Local Bus Specification, Revision 2.1**
- Optimized for the Altera® FLEX® 10K and FLEX 6000 device architectures
- Fully synchronous design
- Does not contain pre-routed or pre-placed logic
- Supports full-speed burst up to 266 Mbytes per second
- Provides zero-wait state data transfers
- Medium-speed decoder
- Fully customizable megafunction
- 3 to 5 minute compilation time

General Description


The 64-bit PCI bus target megafunction is a 64-bit, 33-MHz PCI bus interface that is used for high-speed data transfer applications capable of supporting burst transfers up to 266 Mbytes per second.

Functional Description

The 64-bit PCI bus target megafunction provides a simple and flexible interface between the PCI bus and a user-developed back-end design. The megafunction interfaces with external user applications through an internal back-end design, which users can build from the device's free resources. The megafunction comes with Altera Hardware Description Language (AHDL) and VHDL back-end reference designs that designers can customize for their projects.

Figure 1 shows the block diagram of a sample FLEX 10K internal back-end application. In this sample, the external SRAM buffer application interfaces the megafunction to a 12-ns SRAM buffer via a 64-bit data path. The internal back-end design has exclusive access to the 12-ns SRAM buffer; however, designers can easily implement a non-exclusive access by adding a synchronization mechanism.

Figure 1. Sample Internal Back-End Application Block Diagram

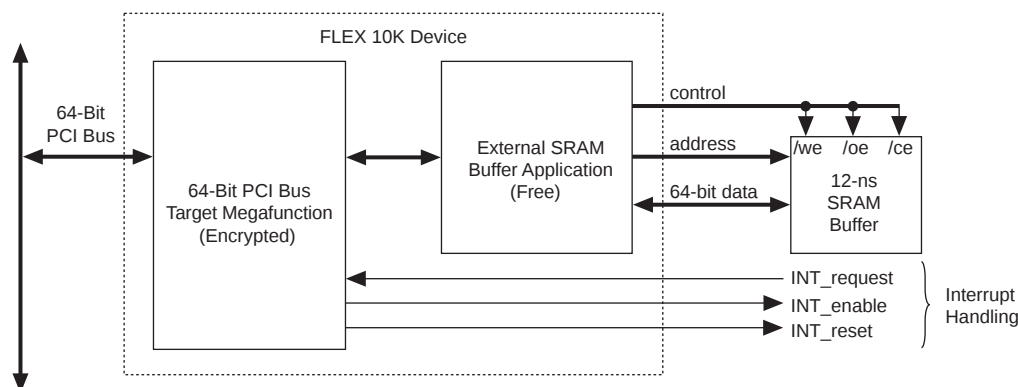

Ports

The megafunction provides a reduced local-side interface that is easy to use. [Table 1](#) describes the local-side ports for the 64-bit PCI bus target megafunction.

Table 1. Local-Side Ports for the 64-Bit PCI Bus Target Megafunction

Name	Type	Description
INT_request	Input	Local interrupt request
data_in[63..0]	Input	Local data input bus
S_disco	Input	Local disconnect request
S_ws	Input	Local wait-state request
Com_reg_in[m..0]	Input	Local configurable input port register
64bit_enable	Input	Local 64-bit transfer enable
SM_out[6..0]	Output	PCI megafunction state machine bus
PCI_RWn	Output	Target transaction direction
RST_hard	Output	Local reset
INT_reset	Output	Interrupt reset
INT_enable	Output	Interrupt enable
data_out[63..0]	Output	Multiplexed address/data output bus
S_data_valid	Output	Data valid signal
M_data_valid	Output	Data valid signal
Com_reg_out[n..0]	Output	Configurable output port register
S_64bit	Output	Nature of transfer (i.e., 32 or 64 bits)

Modifiable Parameters

Designers can customize the 64-bit PCI bus target megafunction with the parameters shown in [Table 2](#).



Table 2. Modifiable Parameters

Parameter	Description
VENDOR_ID	Vendor identifier
DEVICE_ID	Device identifier
REVISION_ID	Revision number
CLASS_CODE	Class code identifier
PREFETCH	Memory attributes
SERR_ENABLE	SERR# control
SPACE_TYPE	Device memory space type (I/O or MEM)
SPACE_SIZE	Device memory space size
MEM_LOCATE	Device memory space location
COM_IN	User-configurable input port size
COM_OUT	User-configurable output port size

Utilization

Table 3 describes the logic cell requirements for the 64-bit PCI bus target megafunction.

Table 3. 64-Bit PCI Bus Target Megafunction Logic Cell Requirements					
Device	Speed Grade	Utilization		f_{MAX} (MHz)	Implementation
		Logic Cells	EABs (1)		
EPF10K50V	-1	440/2,280	0/10	63	Megafunction only
EPF10K30	-3	440/1,728	0/6	39	Megafunction only
	-1	440/1,728	0/6	98	Megafunction only
EPF10K20	-3	440/1,152	0/6	49	Megafunction only
EPF6016	-2	440/1,320	—	49	Megafunction only
		530/1,320	—	49	Megafunction with external SRAM support

Note:

(1) EABs = embedded array blocks.

Deliverables

The 64-bit PCI bus target megafunction includes the following items:

- 64-bit PCI bus target megafunction license
- Encrypted Text Design File (.tdf) netlist
- Symbol File (.sym)
- Top-level Assignment & Configuration File (.acf)
- Simulator Channel File (.scf)
- User guide
- Installation guide



101 Innovation Drive
San Jose, CA 95134
(408) 544-7000
<http://www.altera.com>

Copyright © 1998 Altera Corporation. Altera, FLEX, FLEX 10K, FLEX 6000, EPF10K50V, EPF10K30, EPF10K20, EPF6016, MegaWizard, and AMPP are trademarks and/or service marks of Altera Corporation in the United States and other countries. Other brands or products are trademarks of their respective holders. The specifications contained herein are subject to change without notice. Altera assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Altera Corporation. Altera customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services. All rights reserved.