

4x128Kx16 Static RAM

CMOS, Module

Features

4x128Kx16 bit CMOS Static

Random Access Memory

- Access Times 70 thru 100ns
- Data Retention Function (EDI9F416128LP)
- TTL Compatible Inputs and Outputs
- Fully Static, No Clocks

High Density Packaging

- 80 Pin SIMM, No. 318

Single +5V ($\pm 10\%$) Supply Operation

The EDI9F416128C is a 8192K bit CMOS Static RAM based on eight 128Kx8 Static RAMs mounted on a multi-layered epoxy laminate (FR-4) substrate.


A low power version with data retention (EDI9F416128LP) is also available.

All inputs and outputs are TTL compatible and operate from a single +5V supply. Fully asynchronous, the EDI9F416128C requires no clocks or refreshing for operation.

Pin Configurations and Block Diagram

VSS	1	A11	41
VCC	2	A10	42
NC	3	A9	43
G	4	A8	44
WH	5	A7	45
WL	6	A6	46
NC	7	A5	47
E	8	A6	48
NC	9	A3	49
NC	10	A2	50
NC	11	A1	51
NC	12	A0	52
NC	13	VSS	53
NC	14	VSS	54
NC	15	DQ15	55
NC	16	DQ14	56
NC	17	DQ13	57
NC	18	DQ12	58
NC	19	DQ11	59
NC	20	DQ10	60
E3	21	DQ9	61
E2	22	DQ8	62
E1	23	DQ7	63
E0	24	DQ6	64
VSS	25	DQ5	65
NC	26	DQ4	66
NC	27	DQ3	67
NC	28	DQ2	68
NC	29	DQ1	69
NC	30	DQ0	70
NC	31	NC	71
NC	32	VCC	72
NC	33	NC	73
NC	34	VSS	74
NC	35	NC	75
A16	36	VSS	76
A15	37	VSS	77
A14	38	NC	78
A13	39	NC	79
A12	40	VSS	80

A0-A16	Address Inputs
E0-E3	Chip Enable
G	Output Enables
WH-WL	Write Enables
E	Chip Select
DQ0-DQ15	Data Input/Output
VCC	Supply 5 Volts
VSS	Ground
NC	No Connect

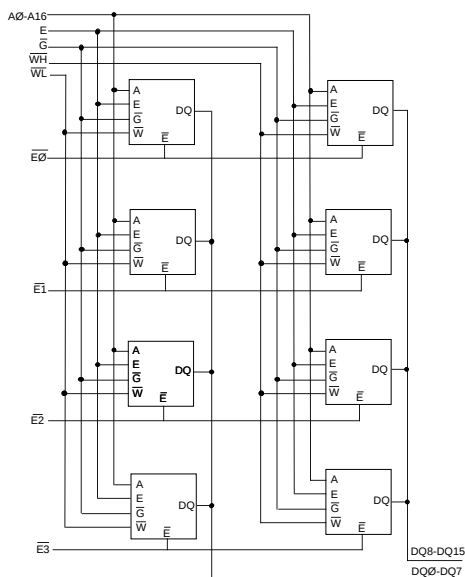

Electronic Designs Incorporated

• One Research Drive • Westborough, MA 01581 USA • 508-366-5151 • FAX 508-836-4850 •

Electronic Designs Europe Ltd. • Shelley House, The Avenue • Lightwater, Surrey GU18 5RF
United Kingdom • 01276 472637 • FAX: 01276 473748

Absolute Maximum Ratings*

Voltage on any pin relative to VSS	-0.5V to 7.0V
Operating Temperature TA (Ambient)	
Commercial	0°C to +70°C
Industrial	-40°C to +85°C
Storage Temperature	
Plastic	-55°C to +125°C
Power Dissipation	1 Watt
Output Current	20 mA

*Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions greater than those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended DC Operating Conditions

Parameter	Sym	Min	Typ	Max	Units
Supply Voltage	VCC	4.5	5.0	5.5	V
Supply Voltage	VSS	0	0	0	V
Input High Voltage	VIH	2.2	--	6.0	V
Input Low Voltage	VIL	-0.3	--	0.8	V

AC Test Conditions

Input Pulse Levels	VSS to 3.0V				
Input Rise and Fall Times	5ns				
Input and Output Timing Levels	1.5V				
Output Load	70ns	1TTL = 30pF			
	85-120ns	1TTL, CL =100pF			

(note: For TEHQZ,TGHQZ and TWLQZ, CL = 5pF)

DC Electrical Characteristics

Parameter	Sym	Conditions	Min	Typ*	Max	Units
Operating Power	ICC1	$\bar{W}, \bar{E} = VIL, I/O = 0mA,$	--	94	158	mA
Supply Current		Min Cycle				
Standby (TTL) Power	ICC2	$\bar{E} \geq VIH, VIN \leq VIL$	--	56	120	mA
Supply Current		$VIN \geq VIH$				
Full Standby Power	ICC3	$\bar{E} \geq VCC-0.2V$	C	--	24	mA
Supply Current		$VIN \geq VCC-0.2V$ or	LP	--	80	μA
CMOS		$VIN \leq 0.2V$				
Input Leakage Current	ILI	$VIN = 0V$ to VCC	--	--	± 10	μA
Output Leakage Current	ILO	$V I/O = 0V$ to VCC	--	--	± 10	μA
Output High Voltage	VOH	$IOH = -1.0mA$	2.4	--	--	V
Output Low Voltage	VOL	$IOL = 2.1mA$	--	--	0.4	V

Truth Table

$\bar{G}$	$\bar{E}$	$\bar{W}$	Mode	Output	Power
X	H	X	Standby	High Z	ICC2, ICC3
H	L	H	Output Deselect	High Z	ICC1
L	L	H	Read	DOUT	ICC1
X	L	L	Write	DIN	ICC1

Capacitance


(f=1.0MHz, VIN=VCC or VSS)

Parameter	Sym	Max	Unit
Address Lines	CI	60	pF
Data Lines	CD/Q	80	pF
Chip Enable Line	CC	15	pF
Write and Output Enable Lines CW		60	pF


AC Characteristics Read Cycle

Parameter	Symbol		70ns		85ns		100ns		Units
	JEDEC	Alt.	Min	Max	Min	Max	Min	Max	
Read Cycle Time	TAVAV	TRC	70		85		100		ns
Address Access Time	TAVQV	TAA		70		85		100	ns
Chip Enable Access Time	TELQV	TACS		70		85		100	ns
Chip Enable to Output in Low Z (1)	TELQX	TCLZ	5		5		5		ns
Chip Disable to Output in High Z (1)	TEHQZ	TCHZ		30		35		40	ns
Output Hold from Address Change	TAVQX	TOH	3		3		3		ns
Output Enable to Output Valid	TGLQV	TOE		40		45		50	ns
Output Enable to Output in Low Z (1)	TGLQX	TOLZ	0		0		0		ns
Output Disable to Output in High Z(1)	TGHQZ	TOHZ		30		35		40	ns

Read Cycle 1 - $\overline{W}$ High, $\overline{G}$, $\overline{E}$ Low

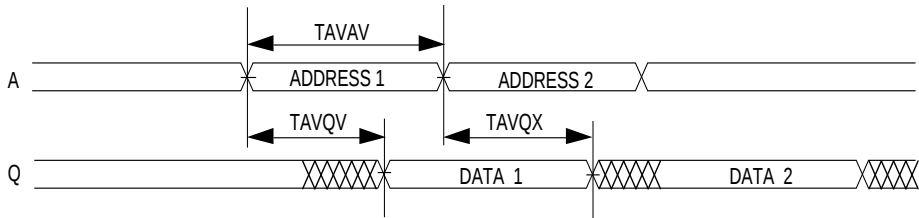

Read Cycle 2 - $\overline{W}$ High

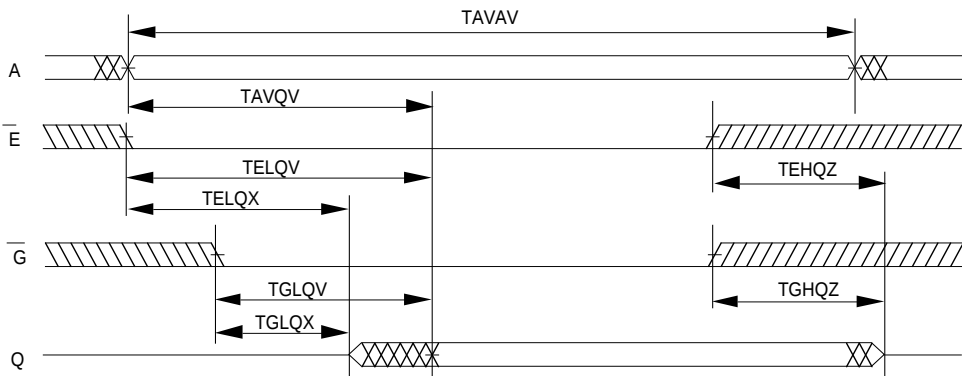



AC Characteristics Write Cycle

Parameter	Symbol		70ns		85ns		100ns		Units
	JEDEC	Alt.	Min	Max	Min	Max	Min	Max	
Write Cycle Time	TAVAV	TWC	70		85		100		ns
Chip Enable to End of Write	TELWH	TCW	65		70		80		ns
	TELEH	TCW	65		70		80		ns
Address Setup Time	TAVWL	TAS	0		0		0		ns
	TAVEL	TAS	0		0		0		ns
Address Valid to End of Write	TAVWH	TAW	65		70		80		ns
	TAVEH	TAW	65		70		80		ns
Write Pulse Width	TWLWH	TWP	65		70		80		ns
	TWLEH	TWP	65		70		80		ns
Write Recovery Time	TWHAX	TWR	0		0		0		ns
	TEHAX	TWR	0		0		0		ns
Data Hold Time	TWHDX	TDH	0		0		0		ns
	TEHDX	TDH	0		0		0		ns
Write to Output in High Z (1)	TWLQZ	TWHZ	0	30	0	35	0	40	ns
Data to Write Time	TDVWH	TDW	30		35		40		ns
	TDVEH	TDW	30		35		40		ns
Output Active from End of Write (1)	TWHQX	TWLZ	5		5		5		ns


Note 1: Parameter guaranteed, but not tested. *Advance Information

Write Cycle 1 - $\overline{W}$ Controlled

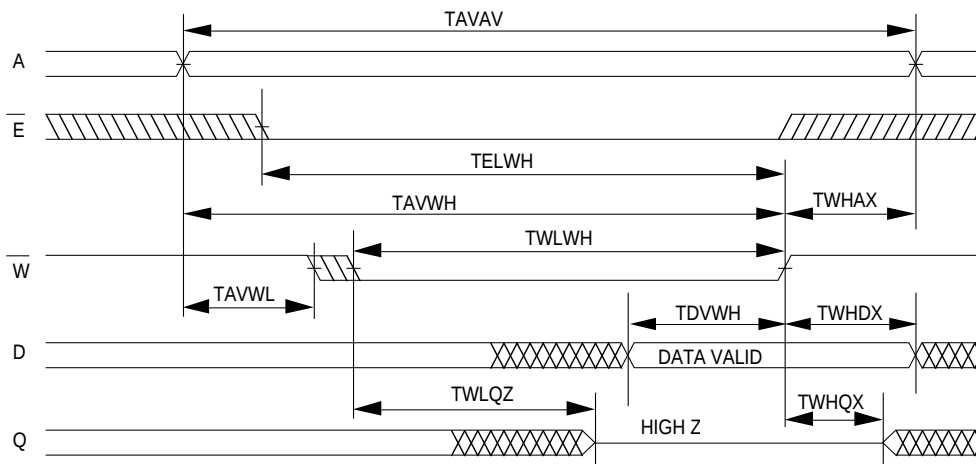

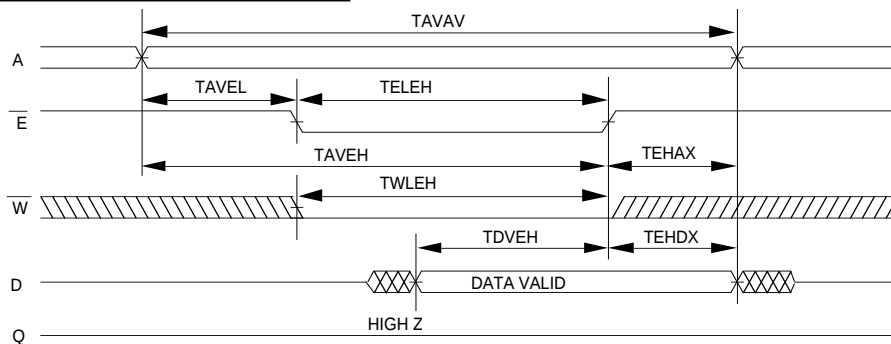Write Cycle 2 - $\bar{E}$ Controlled

Data Retention Characteristics

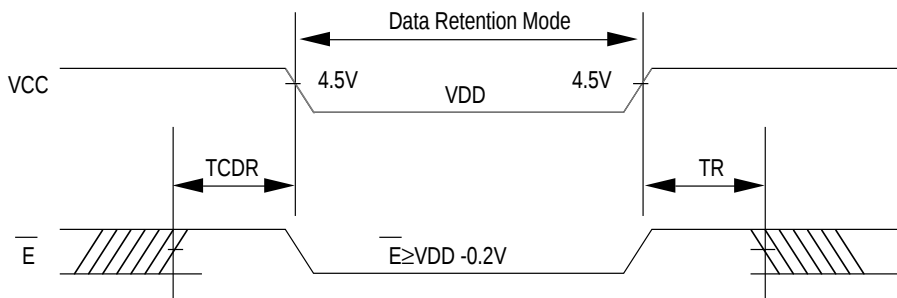Characteristic	Sym	Test Conditions	VDD	Min	Typ	Max	Unit
Data Retention Voltage	VDD	VDD = 0.2V		2	--		V
Data Retention Quiescent Current	ICCDR	$\bar{E} \geq VDD - 0.2V$	2V	--	1	6	μA
		$VIN \geq VDD - 0.2V$	3V	--	1	8	μA
Chip Disable to Data Retention Time(1)	TCDR	or $VIN \leq 0.2V$		0	--	--	ns
Operation Recovery Time (1)	TR			5	--	--	ms

Data Retention - $\bar{E}$ Controlled


Ordering Information


Part Number	Speed (ns)	Package No.
Standard Power		
EDI9F416128C70BNC	70	318
EDI9F416128C85BNC	85	318
EDI9F416128C100BNC	100	318
Low Power		
EDI9F416128LP70BNC	70	318
EDI9F416128LP85BNC	85	318
EDI9F416128LP100BNC	100	318

Note: To order an Industrial grade product substitute the letter C in the Suffix with the letter I, eg. EDI9F416128C70BNC becomes EDI9F416128C70BNI.

Package Description

Package No. 318

80 Lead SIMM Angled

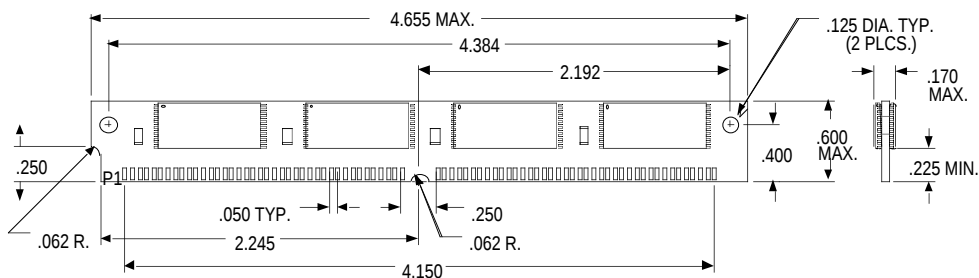

Electronic Designs Incorporated

• One Research Drive • Westborough, MA 01581 USA • 508-366-5151 • FAX 508-836-4850 •

Electronic Designs Europe Ltd. • Shelley House, The Avenue • Lightwater, Surrey GU18 5RF
United Kingdom • 01276 472637 • FAX: 01276 473748

Electronic Designs Inc. reserves the right to change specifications without notice. CAGE No. 66301