

2Megx32 Flash Module

The EDI7F332MC and EDI7F2332MC are organized as one and two banks of 2 meg x 32 respectively. The modules are based on AMDs AM29F016 - 2Meg x 8 Flash device in TSOP packages which are mounted on an FR4 substrate.


Both modules offer access times between 90 and 150ns allowing for operation of high-speed microprocessors without wait states.

Features


- 2 Meg x 32 and 2 x 2 Meg x 32 Densities
- Based on AMD - AM29F016 Flash Device
- Fast Read Access Time - 90ns
- 5- Volt-Only Reprogramming
- Sector Erase Architecture
 - Uniform sectors of 64 Kbytes each
 - Any combination of sectors can be erased
 - Also supports full chip erase
- Sector Protection
 - Hardware method that disables any combination of sectors from write or erase operations
- Embedded Erase Algorithms
 - Automatically preprograms and erases the chip or any combination of sectors
- Embedded Program Algorithms
 - Automatically programs and verifies data at specified address
- Data Polling and Toggle Bit feature for detection of program or erase cycle completion
- Low Power Dissipation
 - 60mA per Device Active Current
 - 10µA per Device CMOS Standby Current
- Typical Endurance >100,000 Cycles
- Single 5 Volt $\pm 10\%$ Supply
- CMOS and TTL Compatible Inputs and Outputs
- Commercial and Industrial Temperature Range
- Package
 - 80 Pin SIMM (JEDEC)

Block Diagrams

EDI7F332MC-BNC
2Megx32 80 pin SIMM

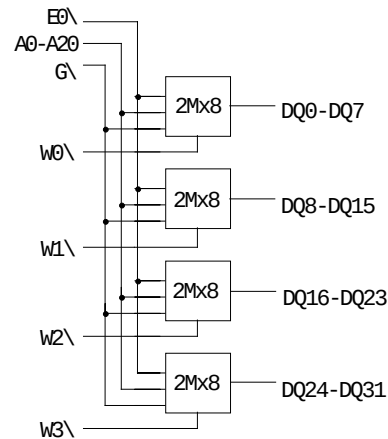

EDI7F2332MC-BNC
2x2Megx32 80 pin SIMM

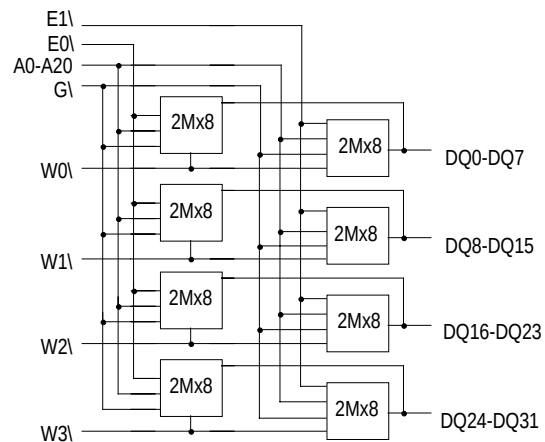

Capacitance

(f=1.0MHz, VIN = VCC or VSS)

Parameter	Sym	2Meg	2x2Meg	Unit
		Max	Max	
Address Lines	CA	35	70	pF
Data lines	CDQ	15	30	pF
Chip & Write Enable Lines	CC	15	30	pF
Output Enable lines	CG	35	70	pF

Pin Configurations

Pin #	Pin Name	Pin #	Pin Name	Pin #	Pin Name	Pin #	Pin Name
1	VSS	21	*	41	A11	61	DQ9
2	VCC	22	*	42	A10	62	DQ8
3	NC	23	*	43	A9	63	DQ7
4	G\	24	*	44	A8	64	DQ6
5	W0\	25	VSS	45	A7	65	DQ5
6	W1\	26	DQ29	46	A6	66	DQ4
7	NC	27	DQ30	47	A5	67	DQ3
8	DQ16	28	DQ31	48	A4	68	DQ2
9	DQ17	29	W2\	49	A3	69	DQ1
10	DQ18	30	NC	50	A2	70	DQ0
11	DQ19	31	NC	51	A1	71	NC
12	DQ20	32	A20	52	AO	72	VCC
13	DQ21	33	A19	53	W3\	73	PD1
14	DQ22	34	A18	54	VSS	74	PD2
15	DQ23	35	A17	55	DQ15	75	PD3
16	DQ24	36	A16	56	DQ14	76	PD4
17	DQ25	37	A15	57	DQ13	77	PD5
18	DQ26	38	A14	58	DQ12	78	PD6
19	DQ27	39	A13	59	DQ11	79	PD7
20	DQ28	40	A12	60	DQ10	80	VSS

Simm Density		
Pin	2Meg	2x2Meg
21	NC	NC
22	NC	NC
23	NC	E1\
24	E0\	E0\

Presence Detect Pin Out		
Pin	2Meg	2x2Meg
PD1	VSS	NC
PD2	NC	VSS
PD3	VSS	VSS
PD4	VSS	VSS

A0-A20	Address input
E0\,E1\	Chip Enable
W0\-W3\	Write Enable
G\	Output Enable
DQ0-DQ31	Data Input/Output
PD	Presence Detect
VCC	Power 5V±10%
VSS	Ground
NC	No Connect


EDI7F332MC

2Megx32

Ordering Information


Part Number	Speed (ns)	Package
EDI7F332MC90BNC	90	369
EDI7F332MC100BNC	100	369
EDI7F332MC120BNC	120	369
EDI7F332MC150BNC	150	369

Package No. 369

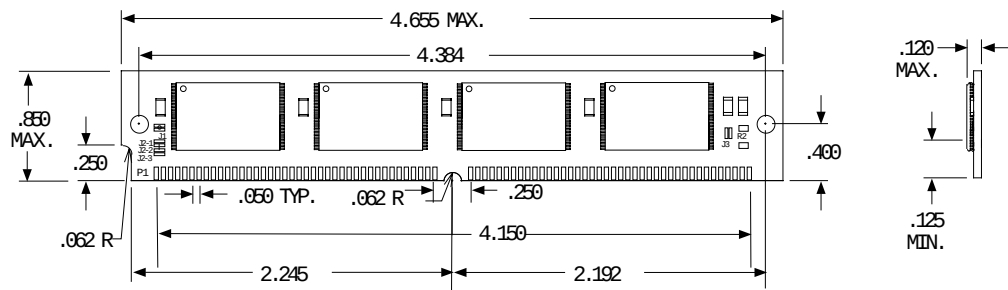

Part Number	Speed (ns)	Package
EDI7F2332MC90BNC	90	370
EDI7F2332MC100BNC	100	370
EDI7F2332MC120BNC	120	370
EDI7F2332MC150BNC	150	370

Package No. 370

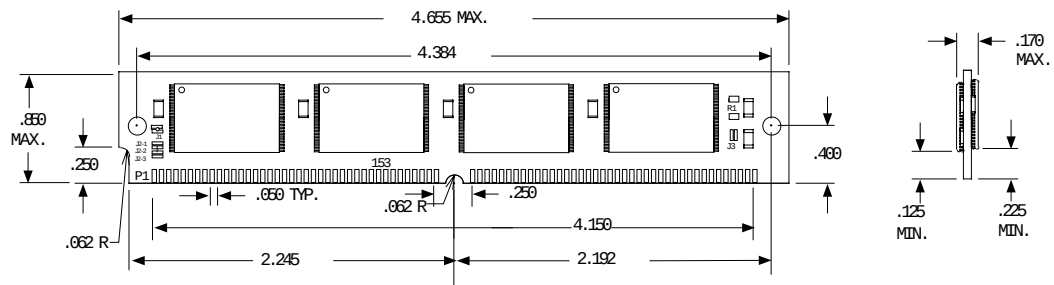

Electronic Designs Incorporated

• One Research Drive • Westborough, MA 01581 USA • 508-366-5151 • FAX 508-836-4850 •

<http://www.electronic-designs.com>

Electronic Designs Inc. reserves the right to change specifications without notice. CAGE No. 66301