

Features

- 4 x 2 Meg x 32
- Based on Intel's 28F016B3 Flash Device
- Fast Read Access Time - 120ns
- Flexible Smart Voltage
 - 2.7-3.6V Program Erase
 - 2.7-3.6V Read Operation
 - 12Vpp Fast Production Programming
- Low Power Dissipation
 - 30mA per Device Active Current
 - 10µA per Device CMOS Standby Current
- Typical Endurance >100,000 Cycles
- Single 3.0 Volt -10%, +20% Supply
- CMOS and TTL Compatible Inputs and Outputs
- Commercial and Industrial Temperature Range
- Package
 - 80 Pin SIMM (JEDEC)


4x2Megx32 Flash Module

The EDI7F4342MV is organized as four banks of 2 Meg x 32. The module is based on Intel's 28F016B3 - 2Megx8 Flash device in TSOP packages which are mounted on an FR4 substrate.

The module offers access times between 120 and 150ns allowing for operation of high-speed microprocessors without wait states.

Block Diagrams

EDI7F4342MV-BNC 4x2Megx32 80 pin SIMM

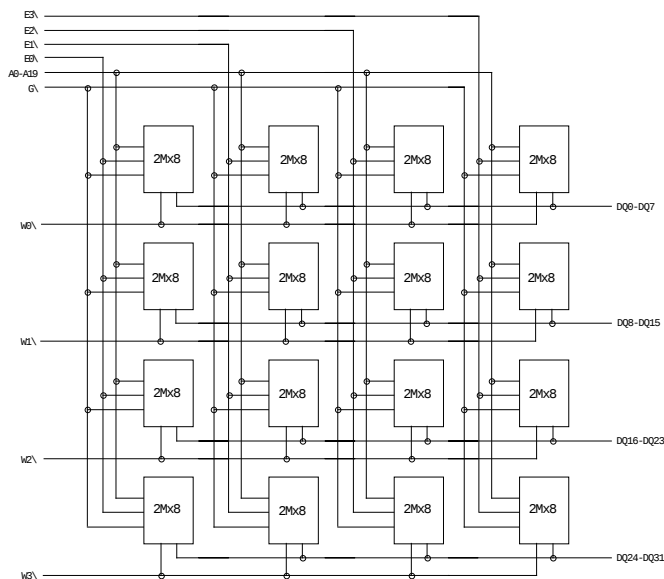

Electronic Designs Incorporated

• One Research Drive • Westborough, MA 01581 USA • 508-366-5151 • FAX 508-836-4850 •
Electronic Designs Europe Ltd. • Shelley House, The Avenue • Lightwater, Surrey GU18 5RF
 United Kingdom • 01276 472637 • FAX: 01276 473748
<http://www.electronic-designs.com>

Capacitance

(f=1.0MHz, VIN = VCC or VSS)

Parameter	Sym	4x2Meg	
		Max	Unit
Address Lines	CA	140	pF
Data lines	CDQ	60	pF
Chip & Write	CC	60	pF
Enable Lines			
Output Enable lines	CG	140	pF

Pin Configurations


Pin #	Pin Name	Pin #	Pin Name	Pin #	Pin Name	Pin #	Pin Name
1	VSS	21	E3\	41	A11	61	DQ9
2	VCC	22	E2\	42	A10	62	DQ8
3	NC	23	E1\	43	A9	63	DQ7
4	G\	24	E0\	44	A8	64	DQ6
5	W0\	25	VSS	45	A7	65	DQ5
6	W1\	26	DQ29	46	A6	66	DQ4
7	NC	27	DQ30	47	A5	67	DQ3
8	DQ16	28	DQ31	48	A4	68	DQ2
9	DQ17	29	W2\	49	A3	69	DQ1
10	DQ18	30	NC	50	A2	70	DQ0
11	DQ19	31	NC	51	A1	71	NC
12	DQ20	32	NC	52	AO	72	VCC
13	DQ21	33	A19	53	W3\	73	PD1
14	DQ22	34	A18	54	VSS	74	PD2
15	DQ23	35	A17	55	DQ15	75	PD3
16	DQ24	36	A16	56	DQ14	76	PD4
17	DQ25	37	A15	57	DQ13	77	PD5
18	DQ26	38	A14	58	DQ12	78	PD6
19	DQ27	39	A13	59	DQ11	79	PD7
20	DQ28	40	A12	60	DQ10	80	VSS

Presence Detect Pin Out	
Pin	4x2Meg
PD1	VSS
PD2	VSS
PD3	VSS
PD4	VSS

A0-A20	Address input
E0\,E1\, E2\, E3\	Chip Enable
W0\-W3\	Write Enable
G\	Output Enable
DQ0-DQ31	Data Input/Output
PD	Presence Detect
VCC	Power 3V -10% +20%
VSS	Ground
NC	No Connect

Ordering Information

Part Number	Speed (ns)	Package
EDI7F4342MV120BNC	120	394
EDI7F4342MV150BNC	150	394

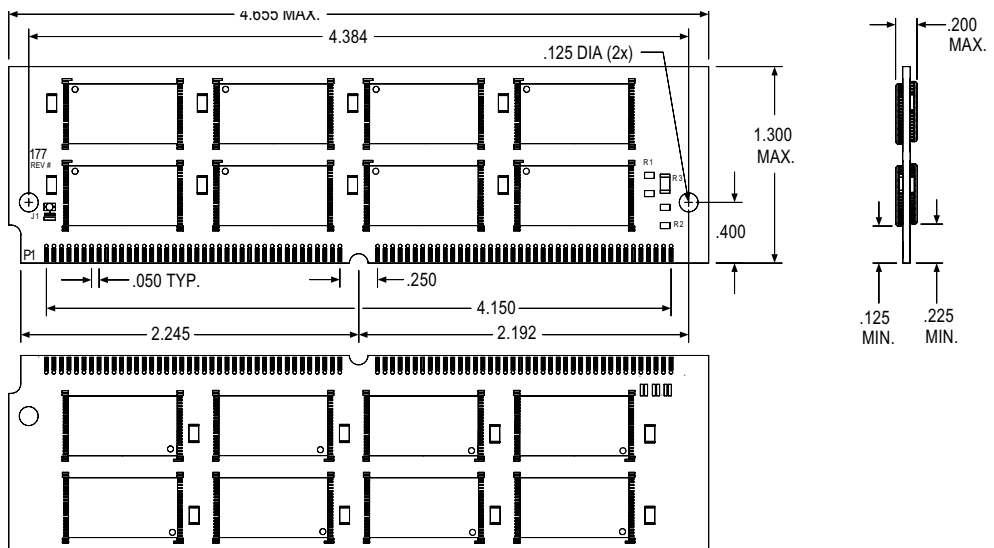Package No. 394

Electronic Designs Incorporated

• One Research Drive • Westborough, MA 01581USA • 508-366-5151 • FAX 508-836-4850 •
Electronic Designs Europe Ltd. • Shelley House, The Avenue • Lightwater, Surrey GU18 5RF
 United Kingdom • 01276 472637 • FAX: 01276 473748
<http://www.electronic-designs.com>

Electronic Designs Inc. reserves the right to change specifications without notice. CAGE No. 66301