


Wireless Processor

Preliminary Product Brief

The e8720™ Wireless Processor is a highly-integrated and optimized mixed-signal Product-on-Chip™ (PoC™) solution. The e8720 incorporates a digital core and an analog front end in a single package solution. The digital core contains a powerful DSP, robust microprocessor, configurable RF interface, Bluetooth™ baseband controller and two high-bandwidth baseband controllers. The analog front end contains an audio CODEC, three analog inputs, two analog output drivers, power amplifier and a DC/DC converter. The e8720 is targeted at wireless implementations of telephony, networking and information appliances. Wireless applications include PDAs, MP3 players, web pads, cordless telephones, distributed audio systems and residential gateways.

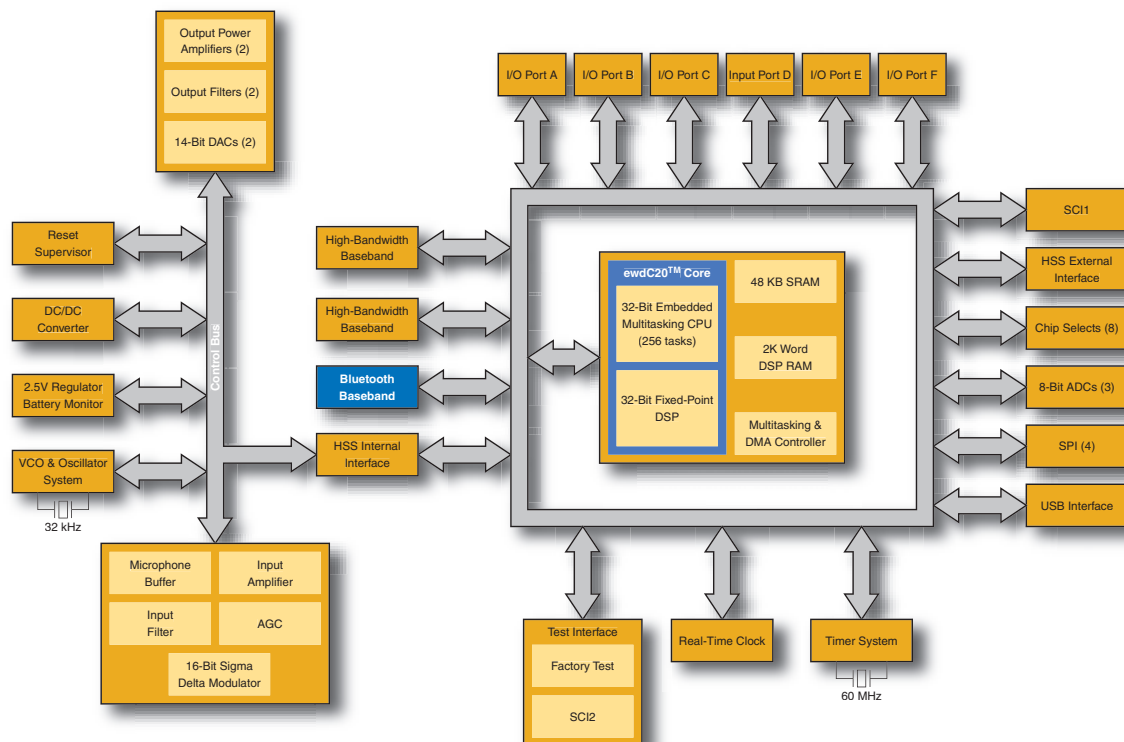

e8720 Wireless Processor Block Diagram

Digital Features

- 2.7V to 3.3V operation
- ewdC20™ core
 - 60 MHz 32-bit microprocessor
 - 32-bit fixed-point DSP
 - eMOS™ Embedded Multitasking Operating System providing 256 simultaneous tasks
- Bluetooth baseband controller
- Two GFSK high-bandwidth baseband controllers
 - DECT compatible
 - WDCT compatible
 - HomeRF compatible
- Configurable RF interface
- True Response™
 - Simultaneous Flash memory read and write
- PCMCIA v1.0 interface support
- Removable media interface
- 16 MB program space/addressing range
- 2K word DSP RAM
- 48 KB generic data/program SRAM
- NAND Flash interface
- ISA bus compatible
- Three programmable chip selects
- Eight fixed chip selects
- 40 programmable I/Os
- 8/16-bit selectable external data bus
- 16/24-bit timer/counter with output compare and input capture

Digital Features (continued)

- DMA control for SPI, baseband, and CODEC bus
- Four serial peripheral interfaces (SPI)
- Two SCI (UART) interfaces
- IrDA infrared controller (IrLAN 1.0)
- High-speed serial (HSS) interface for analog peripherals
- 16-channel ADPCM G726 compression/decompression
- 16-channel DTMF detection
- 16-channel FSK demodulation (TIA SP-4078)
- 16-channel CAS tone detection (TIA SP-4078)
- USB Interface v1.1
- Three 8-bit ADCs
- 47 vectored interrupts
- Real-time clock (RTC)
- In-circuit debug and programming (ICDP)

Analog Features

- Low power consumption
- Intelligent power management
 - Complete power down ability
- Step-up DC/DC converter
- Audio CODEC
 - 16-bit sigma delta ADC
 - Two 14-bit linear DACs
 - Input/output selectable
 - Stereo mode
- Three multiplexed analog inputs
 - 16-bit audio input
- Two analog output drivers
 - Variable attenuators (-45 dB max.)
 - 14-bit DAC output
 - Fixed reference voltage
- Power amplifier for speaker output
 - Balanced output
 - 50 ohm output impedance
- Differential microphone amplifier
- Oscillator system with digital-controlled VCO
 - 32.768 kHz crystal input
 - In-lock status bit
- Divide-by-N VCO reference clock
- Programmable reset circuit for digital device


Applications

- Telecom devices
- Digital audio devices
- Information appliances
- Computer peripherals
- Bluetooth devices

Package Availability

- Industry-standard BGA

Application Example

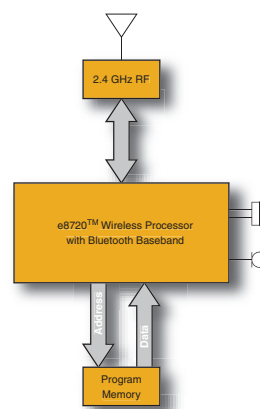

Wireless Headset

5200 Franklin Drive
Pleasanton, CA 94588
Phone: 925.251.6200
Fax: 925.251.6201

Holmboes Allé 1
3rd Floor
8700 Horsens
Denmark
Phone: +45.7628.6250
Fax: +45.7628.6251

Website:
<http://www.ewdi.com>

E-mail:
information@ewdi.com

© 2001 embedded wireless devices inc. All rights reserved.

ewd, the ewd logo, ewdC20, e8720, eMOS, PoC, Product-on-Chip, and True Response are trademarks of embedded wireless devices inc.

Bluetooth is a trademark of Telefonaktiebolaget L M Ericsson, Sweden, and is licensed to embedded wireless devices inc.

WARRANTIES AND DISCLAIMERS:
THIS DOCUMENT IS PUBLISHED FOR INFORMATIONAL PURPOSES ONLY AND IS PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND. ewd™ DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO THIS INFORMATION, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL ewd BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF, OR RELIANCE UPON, ANY INFORMATION IN THIS DOCUMENT OR ANY ERROR OR OMISSION IN SUCH INFORMATION. ewd RESERVES THE RIGHT TO UPDATE, CHANGE OR REMOVE PORTIONS OF THE INFORMATION PROVIDED HEREIN WITHOUT NOTICE.

0004-v5-08/09/01-xM

embedded wireless devices inc

Founded in 1995, with headquarters in Pleasanton, California and a design facility in Horsens, Denmark, embedded wireless devices inc develops and markets solutions for multi-point broadband wireless networking. By combining a highly-optimized MPU/DSP host processor and eMOS™ operating system with multiple programmable basebands, analog front end, and system memory, ewd solves the dilemma of simultaneous voice and data communications in enterprise and residential broadband wireless networking environments.

For wireless applications such as home networking, telephony, PDAs, VoIP devices, MP3 players/recorders and information appliances, ewd's total product solutions shorten product development cycles and significantly reduce the product's complexity and overall cost. Core competencies include wireless applications and protocols, multiple programmable basebands, multitasking architectures, digital signal processing, and analog and RF design.