


SBD Type : EA60QC03L

OUTLINE DRAWING

FEATURES

- * TO-251AA Case
- * Dual Diodes Cathode Common
- * Low Forward Voltage drop
- * Low Power Loss
- * High Surge Capability
- * 30 Volts thru 100 Volts Types Available

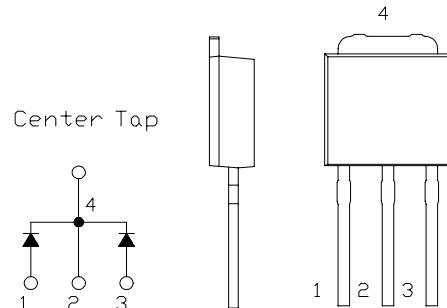

Maximum Ratings

Approx Net Weight:0.35g


Rating	Symbol	EA60QC03L				Unit	
Repetitive Peak Reverse Voltage	V _{RRM}	30				V	
Average Rectified Output Current	P.C.Board mounted *	Io	2.0	T _a =20°C	50Hz Full Sine Wave Resistive Load	A	
			6.0	T _c =111°C			
RMS Forward Current	I _{F(RMS)}	6.66				A	
Surge Forward Current	I _{FSM}	45	50Hz Full Sine Wave,1cycle, Non-repetitive				
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150				°C	
Storage Temperature Range	T _{stg}	- 40 to + 150				°C	

Electrical • Thermal Characteristics

Characteristics		Symbol	Conditions	Min	Typ	Max	Unit
Peak Reverse Current		I _{RM}	T _j =25°C, V _{RRM} =V _{RRM} per Arm	-	-	3.0	mA
Peak Forward Voltage		V _{FM}	T _j =25°C, I _{FM} = 3 A per Arm	-	-	0.45	V
Thermal Resistance	Junction to Ambient	R _{th(j-a)}	P.C.Board mounted *	-	-	80	°C/W
	Junction to Case	R _{th(j-c)}	-	-	-	5	°C/W

* Print Land = 20x20 mm

EA60QC03L OUTLINE DRAWING (Dimensions in mm)

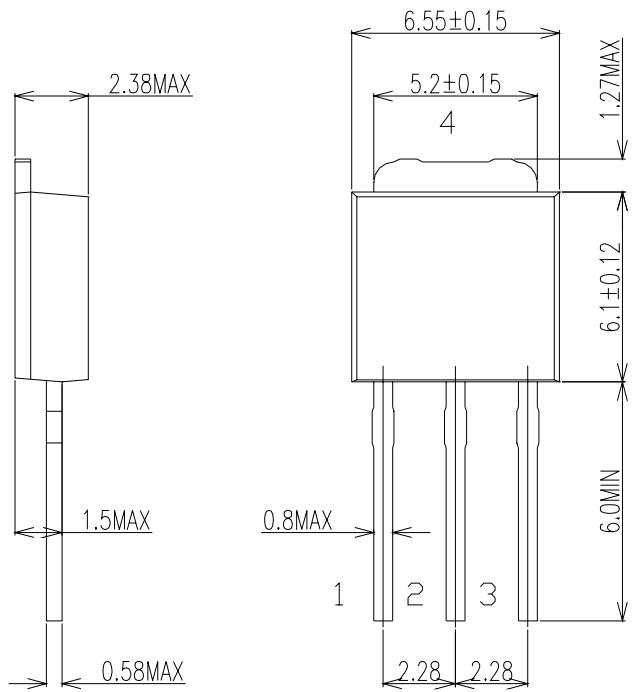

Center Tap

