


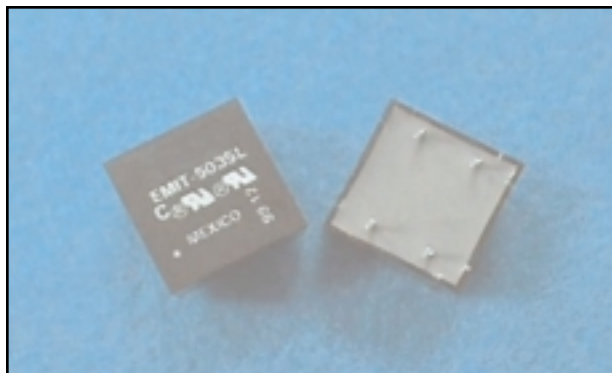

FEATURES

- Suitable for modem speeds up to V.90 (56 kbps) at top performance.
- Total Harmonic Distortion rated -93 dB typ. @ 600 Hz, -10 dBm and -85 dB typ. @ 150 Hz, -3 dBm.
- Insertion Loss rated 1.55 dB typ. @ 2000 Hz.
- Complies with IEC60950 Reinforced safety norms.
- Reflects 600 Ohms on Primary with 420 Ohms Secondary Load.
- Uses minimal external components for impedance matching to pan-European CTR21 line standards.
- Very small PCB footprint (18.3 mm x 18.3 mm).
- Low-Profile (12.6 mm).
- Industry-standard pin configuration.

DESCRIPTION

The REMtech Magnetics EMIT-5035L is a “Dry” Encapsulated Modem Isolation Transformer suitable for up to V.90 (56 kbps) consumer and internet analog modem applications compliant with International safety norms.


EMIT-5035L offers very low Distortion, very flat Frequency Response, and good Return Loss, with simple impedance matching for 600-ohm telephone lines (also suits CTR-21).

For cost reduction, EMIT-4035L serves as a “drop-in” replacement device with nominal performance impact.


PRODUCT COMPLIANCE

- UL / C-UL recognized file number: Pending
- BSI certificate number(s): Pending
- BABT certificate of recognition: Pending

NOMENCLATURE (Fig. 1)

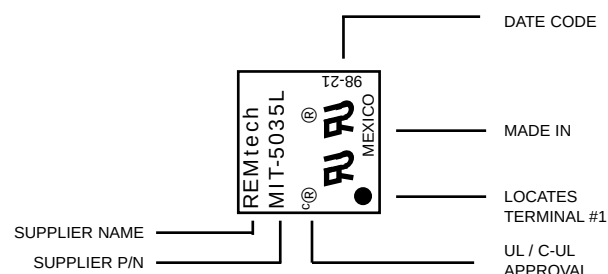

MECHANICAL DIMENSIONS (Fig. 2)

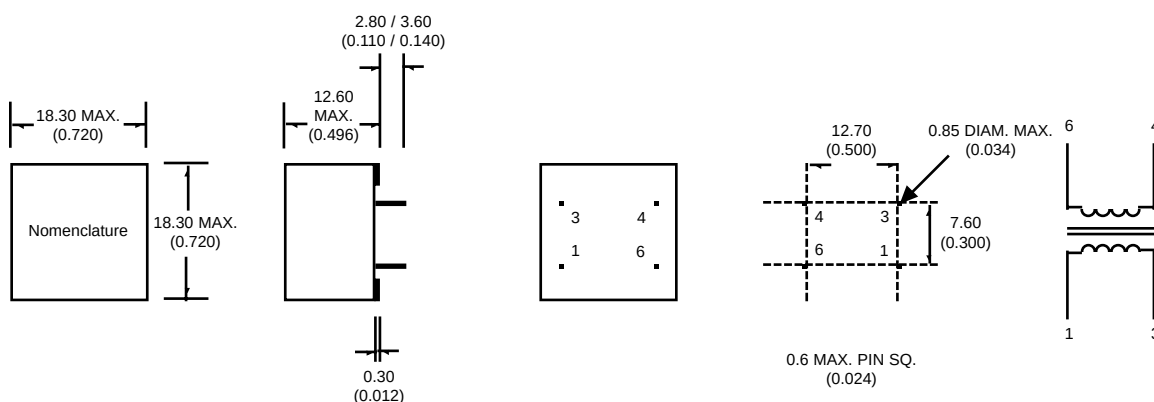

Literature Number: DSA.EMIT-5035L
© Copyright 2000, REMtech Corporation
All rights reserved. Printed in U.S.A.
7/00


Analog Telephony / Modem Couplers

ELECTRICAL PERFORMANCE SPECIFICATIONS

Electrical Performance Specifications ($T_A = 25^\circ\text{C}$ unless otherwise specified)


PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS
Impedance	Reflected on Primary With Load on Secondary	- -	600 420	- -	Ohms Ohms
Total Harmonic Distortion	@ 600 Hz, -10 dBm @ 150 Hz, -3 dBm	- -	-93 -85	-86 -75	dB dB
Insertion Loss	Per IEEE method; @ 2000 Hz	-	1.55	1.70	dB
Return Loss	200 Hz - 4000 Hz Per 600 Ohm Match (Fig. 3) Per CTR21 Pan-Euro Match (Fig. 10)	22 22	- -	- -	dB dB
Dielectric Breakdown Isolation Production methods applied:	Safety Standard tested 1 Min. HiPot Voltage Duration Trip Leakage Current	3000 3750 2 -	- - - -	- - - 200	Vrms Vrms Sec μA
Frequency Response	200 Hz - 4000 Hz	-	± 0.10	-	dB
Longitudinal Balance	Per FCC part 68.310 60 Hz - 1000 Hz 1000 Hz - 4000 Hz	60 40	- -	- -	dB dB
DC Resistance @ 20°C , $\pm 10\%$	Primary Winding Secondary Winding	- -	82 106	- -	Ohms Ohms
DC Current in Primary	-	-	0	-	mADC
Turns Ratio	Primary to Secondary; $\pm 2\%$	-	1:1	-	Turns
Operating Temperature	-	-40	-	105	$^\circ\text{C}$
Storage Temperature	-	-40	-	125	$^\circ\text{C}$
Soldering Temperature	10 Sec. Max.	-	-	260	$^\circ\text{C}$

600 OHM MATCH (Fig. 3)

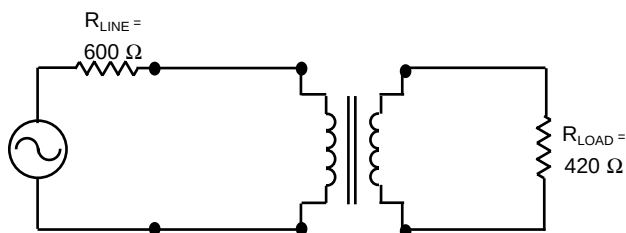

SCHEMATIC EQUIVALENT (Fig. 4)


(Typical Transformer Model @ 1 V, 1 kHz)

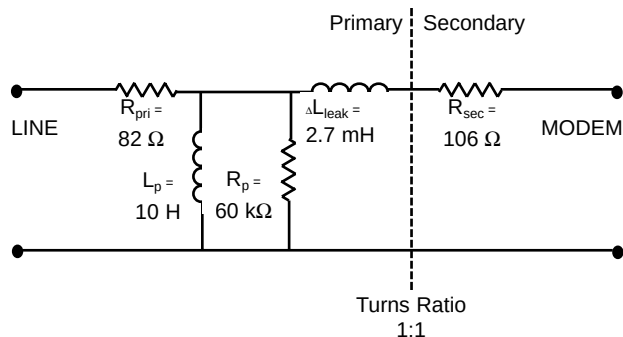

REMtech Corporation makes no assertion or warranty that the circuitry and the uses thereof disclosed herein are non-infringing on any valid US or foreign patents. REMtech assumes no liability as a result of the use of said specifications and reserves the right to make changes to specifications without notice. REMtech does not authorize or warrant any REMtech device for use in life support devices and/or systems. Contact your nearest REMtech Sales Office for the latest specifications.

Literature Number: DSB.EMIT-5035L
 © Copyright 2000, REMtech Corporation
 All rights reserved. Printed in U.S.A.
 7/00


STANDARD PACKAGING (Fig. 9)

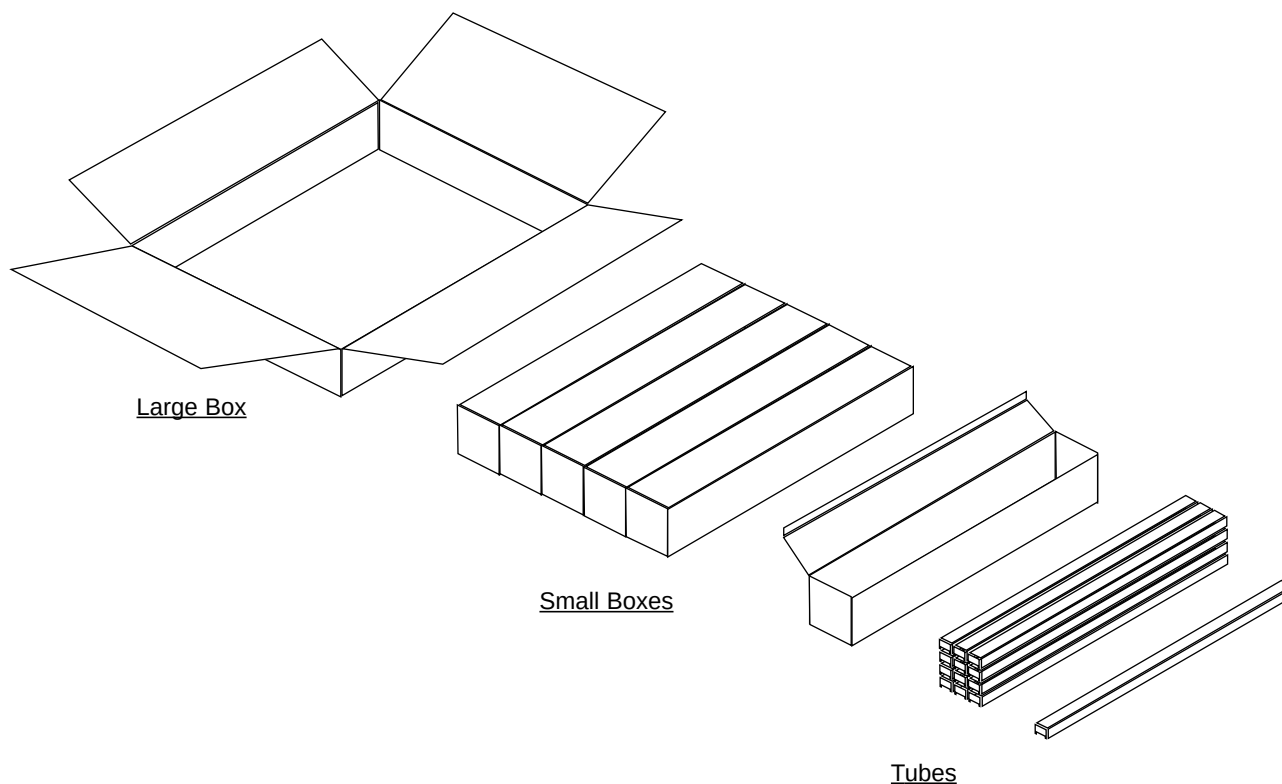

Packaging			Weight	Weight
Material	Contents	#Transformers	(lbs)	(kg)
Large Box	5 Small Boxes	1500	46.25	21
Small Box	12 Tubes	300	9.12	4.14
Tube	25 Transformers	25	0.585	0.266
---	Transformer	1	0.0205	0.0093

PAN-EUROPEAN CTR21 MATCH (Fig. 10)

(Application circuits available on request for specific national match requirements.)


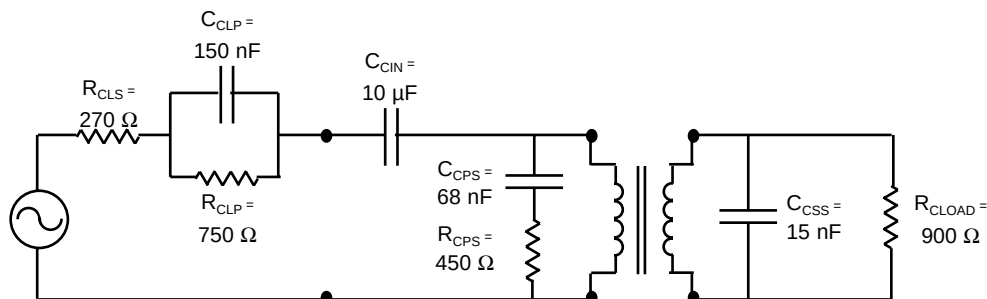


Literature Number: DSC.EMIT-5035L
 © Copyright 2000, REMtech Corporation
 All rights reserved. Printed in U.S.A.
 7/00


Analog Telephony / Modem Couplers

PERFORMANCE DATA


TOTAL HARMONIC DISTORTION (Fig. 5)

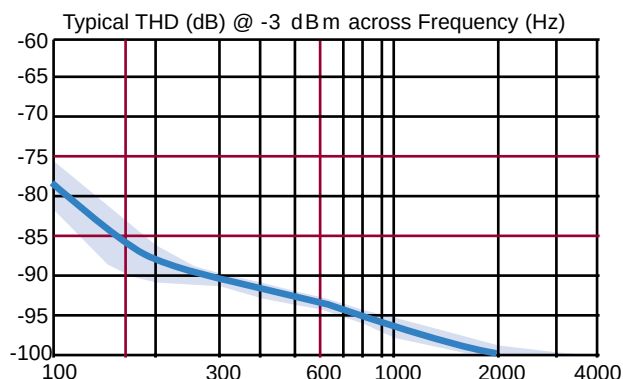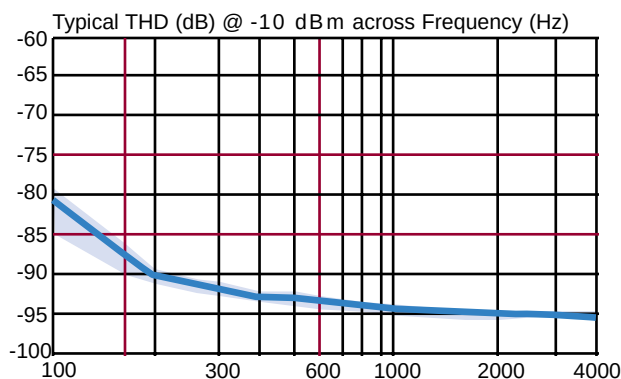



INSERTION LOSS (Fig. 6)

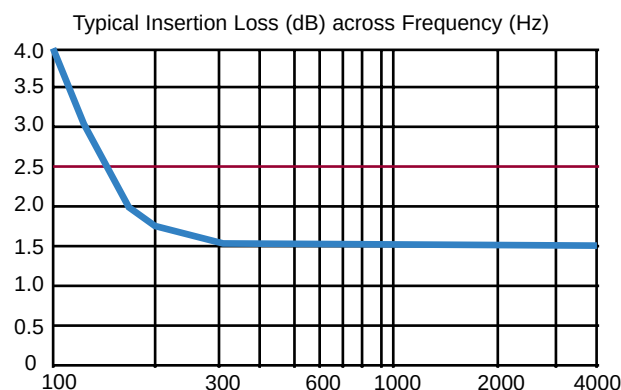

FREQUENCY RESPONSE (Fig. 7)

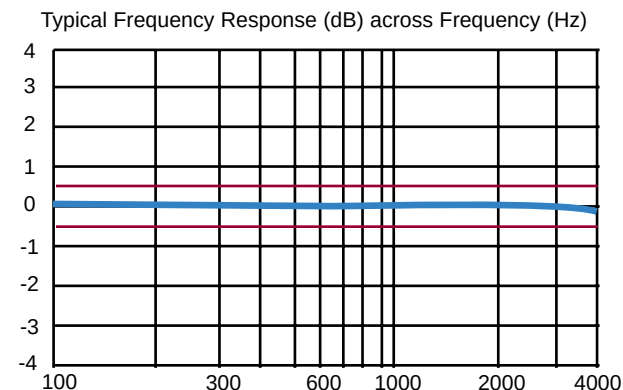

RETURN LOSS (Fig. 8)

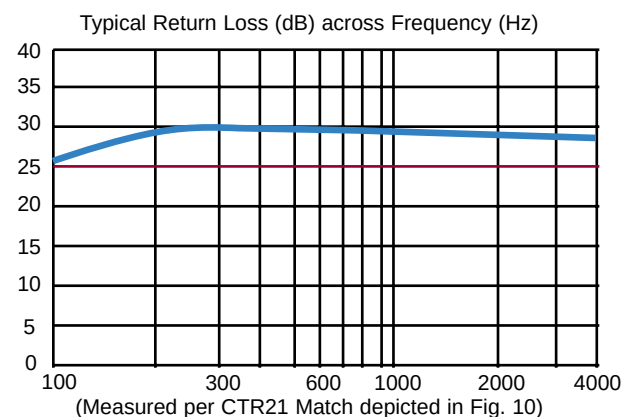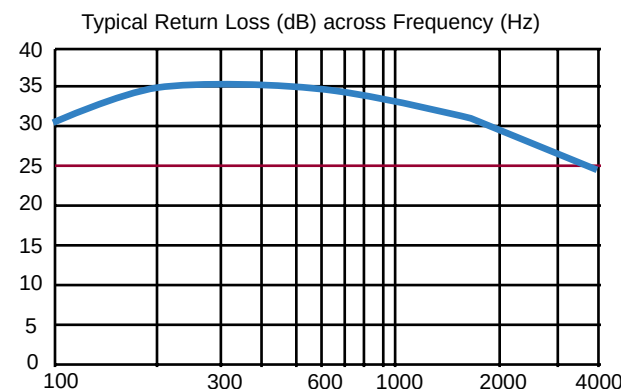

REMtech Corporation makes no assertion or warranty that the circuitry and the uses thereof disclosed herein are non-infringing on any valid US or foreign patents. REMtech assumes no liability as a result of the use of said specifications and reserves the right to make changes to specifications without notice. REMtech does not authorize or warrant any REMtech device for use in life support devices and/or systems. Contact your nearest REMtech Sales Office for the latest specifications.

Literature Number: DSD.EMIT-5035L
 © Copyright 2000, REMtech Corporation
 All rights reserved. Printed in U.S.A.
 7/00