



EVERLIGHT ELECTRONICS CO.,LTD.

Device Numb DDD-305-025 REV: 1.0

0.3" Dual Digit Displays

MODEL NO : ELD-305HWB ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELD-305 series is a large 7.62mm
(0.3")high seven segment display
design for viewing distances up to
7 meters.
- These displays provide excellent
reliability in bright ambient light.
- These device is made with white
segments and black surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELD-305HWB	GaP	Bright Red	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



Device Numb DDD-305-025

REV: 1.0


0.3" Dual Digit Displays

MODEL NO : ELD-305HWB

ECN :

Page: 2/5

■ Package Dimensions:

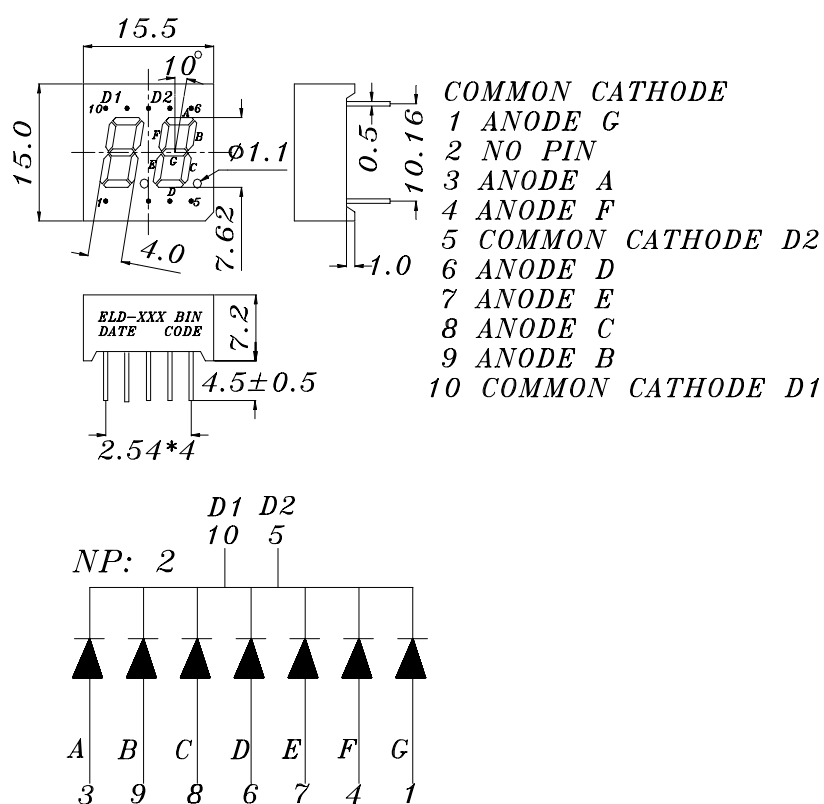

■ NOTES:

- 1.All dimensions are in millimetres tolerance is 0.25mm unless otherwise noted.
2.Above specification may be changed without notice.
Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-305-025 REV: 1.0

0.3" Dual Digit Displays

MODEL NO : ELD-305HWB ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	15	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	45	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	50	mA

■ Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per segment	Iv	0.18	0.3	----	mcd	If=10mA
	Per decimal point		0.05	0.10	----	mcd	If=10mA
Peak Wavelength		λ_p	----	697	----	nm	If=10mA
Dominant Wavelength		λ_d	----	650	----	nm	If=10mA
Spectrum Radiation Bandwidth		$\Delta \lambda$	----	90	----	nm	If=10mA
Forward Voltage		Vf	1.5	2.0	2.4	V	If=10mA
Reverse Current		Ir	----	----	10	μA	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-305-025 REV: 1.0

0.3" Dual Digit Displays

MODEL NO : ELD-305HWB ECN : Page: 4/5

■ Reliability test item and condition:					
NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260℃ ± 5℃	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85℃ 30min └ 5 min L : -55℃ 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100℃ 5min └ 10 sec L : -10℃ 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100℃	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55℃	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85℃ /85% RH	1000 HRS	76 PCS	0/1



EVERLIGHT ELECTRONICS CO.,LTD.

Device Nu DDD-305-025 REV: 1.0

0.56" T10.3" Dual Digit Displays

MODEL NO: ELD-305HWE ECN: Page: 5/5

■ Typical Electro-Optical Characteristic Curves:

