




- Reinforced Insulations •
- 3750 Vrms Isolation •
- Packaged for Pocket Modem & Laptop use •

Electrical Parameters @ 25° C


Insertion Loss (dB Max.)	Return Loss (dB Min.)	Total Harmonic Distortion (dB Typ. @ -10dBm Test Level)						Longitudinal Balance (dB Min.)
@1000 Hz	@200-4000 Hz	@100 Hz	@150 Hz	@200 Hz	@250 Hz	@300 Hz	@600 Hz	@60-4000 Hz
-3.0	-14	-64	-70	-74	-77	-80	-85	-60

• Pri. Impedance: 600Ω Typ. @200- 4000Hz w/Sec. RL = 348Ω • DCR: Pri.& Sec. = 152 Ω ±10% •


Schematic



Typical Frequency Response

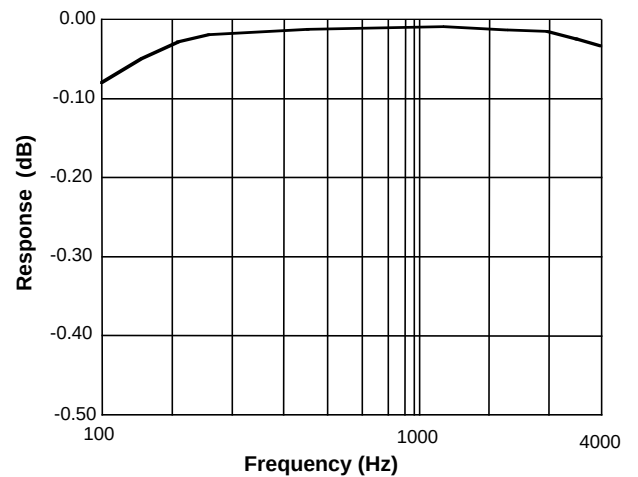

Package

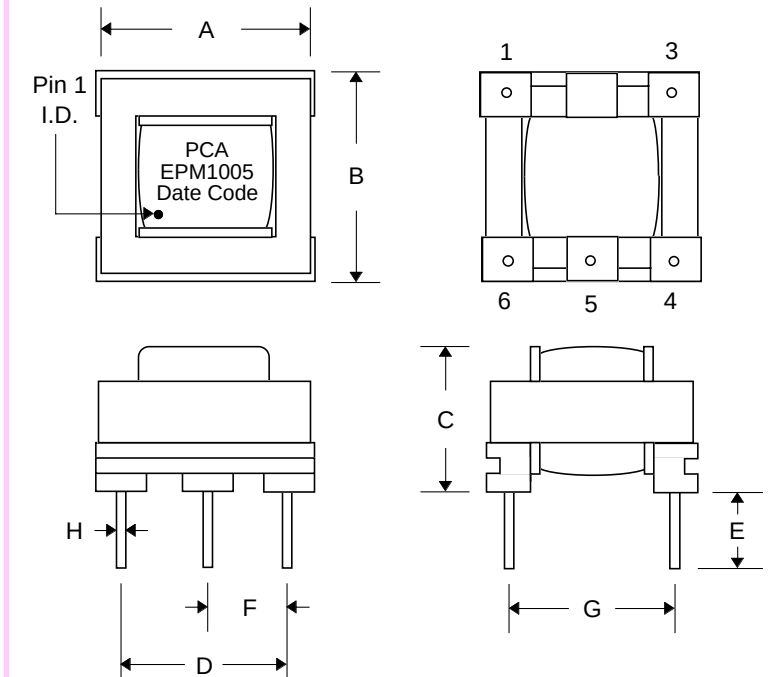

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	-	.570		-	14.48	
B	-	.550		-	13.97	
C	-	.450		-	11.43	
D	.395	.405	.400	10.03	10.29	10.16
E	.200	.230	.215	5.08	5.84	5.46
F	.195	.205	.200	4.95	5.21	5.08
G	.395	.405	.400	10.03	10.29	10.16
H	.022	.028	.025	.559	.711	.635