


- Low Distortion •
- Flat Frequency Response •
- 2000 Vrms Isolation •

Electrical Parameters @ 25° C


Insertion Loss (dB Max.)	Return Loss (dB Min.)	Total Harmonic Distortion (dB Typ. @ -10dBm Test Level)						Longitudinal Balance (dB Min.)		DCR ($\Omega \pm 15\%$)	
@1000 Hz	@200-4000 Hz	@100 Hz	@150 Hz	@200 Hz	@250 Hz	@300 Hz	@600 Hz	@200-1000 Hz	@1000-4000 Hz	Pri.	Sec.
-2.5	-8	-77	-83	-85	-85	-85	-86	-60	-40	108	120

• Pri. Impedance: 600 Ω Typ. @200- 4000Hz w/Sec. RL = 347 Ω •


Schematic



Typical Frequency Response

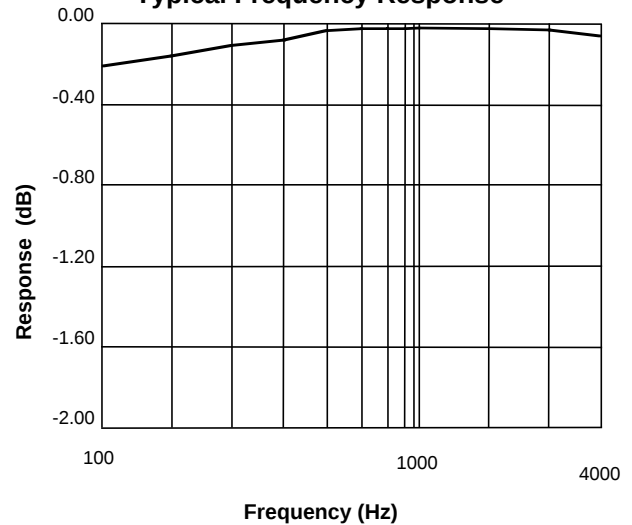

Package

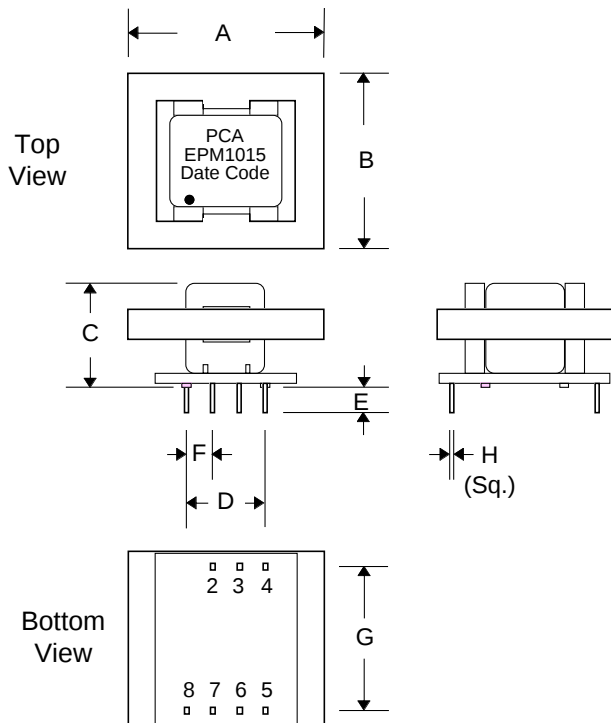

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	1.000	1.025	1.02	25.40	26.04	25.91
B	.875	.945	.910	22.23	24.00	23.11
C	.350	.550	.540	13.46	13.97	11.84
D	---	---	.450	---	---	11.43
E	---	.160	.150	---	4.06	3.81
F	---	---	.150	---	---	4.32
G	---	---	.750	---	---	19.04
H	.023	.027	.025	.584	.686	.635