


EC13 Series

- HCMOS/TTL output
- 3.3V supply voltage
- 14 pin DIP package
- Stability to 20ppm
- Custom lead length, gull wing options available

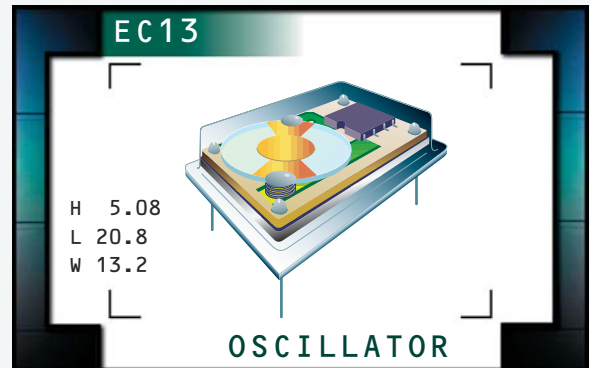

ELECTRICAL SPECIFICATIONS

Frequency Range		500.000kHz to 106.250MHz
Operating Temperature Range		0°C to 70°C, -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ±0.3V _{DC}
Input Current	500.000kHz to 24.000MHz	10mA Maximum
	24.001MHz to 70.000MHz	25mA Maximum
	70.001MHz to 106.250MHz	45mA Maximum
Frequency Tolerance / Stability		Inclusive of Operating Temperature Range, Supply Voltage, and Load ±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum (0°C to 70°C Only)
Output Voltage Logic High (V_{OH})	w/ TTL Load	2.4V _{DC} Minimum
	w/ HCMOS Load	2.7V _{DC} Minimum
Output Voltage Logic Low (V_{OL})	w/ TTL Load	0.4V _{DC} Maximum
	w/ HCMOS Load	0.5V _{DC} Maximum
Rise Time / Fall Time	10% to 90% of Waveform w/HCMOS Load	10 nSeconds Max. ≤24.000MHz
		6 nSeconds Max. 24.001MHz to 70.000MHz
		4 nSeconds Max. 70.000MHz to 106.250MHz
	0.4V _{DC} to 2.4V _{DC} w/TTL Load	10 nSeconds Max. ≤24.000MHz
Duty Cycle	at 50% of Waveform ≤70.000MHz	50 ±10(%) (Standard) or 50 ±5(%) (Optional)
	at 50% of Waveform 70.001MHz to 106.25MHz (0°C to 70°C)	50 ±10(%) (Standard) or 50 ±5(%) (Optional)
	at 50% of Waveform 70.001MHz to 106.25MHz (-40°C to 85°C)	50 ±10(%) (Standard)
Load Drive Capability	4.000MHz to 24.000MHz	2TTL or 15pF HCMOS Load
	24.001MHz to 106.250MHz	15pF HCMOS Load
Tri-State Input Voltage	V_{IH} : No Connection	Enables Output
	V_{IH} : ≥2.2V _{DC}	Enables Output
	V_{IL} : ≤0.8V _{DC}	Disables Output: High Impedance
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10 mSeconds Maximum
Period Jitter: Absolute		±100pSeconds Maximum
Period Jitter: One Sigma		±25pSeconds Maximum

PART NUMBERING GUIDE

EC13 00 ET TS - 50.000M - G

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
45=±50ppm Maximum, 25=±25ppm Maximum
20=±20ppm Maximum

OPERATING TEMP. RANGE

Blank=0°C to 70°C (Standard), ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%) (Standard), T=50 ±5(%)

AVAILABLE OPTIONS

Blank=None (Standard)
CLXXX=Custom Lead Length (See Page 133)
G=Full Size Gull Wing (See Page 132)


FREQUENCY

OUTPUT CONTROL FUNCTION

Blank=None (No Connection on Pin 1)
TS=Tri-State Enable High

NOTES

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

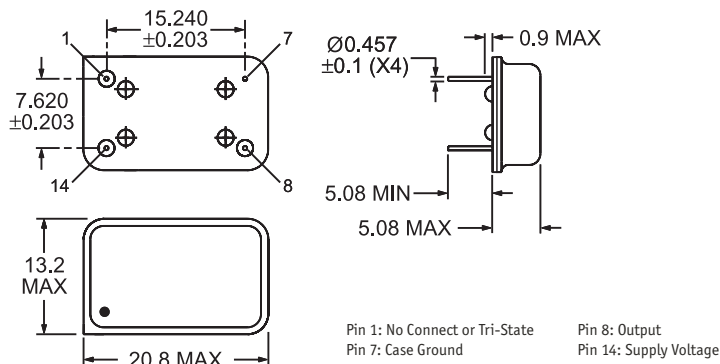

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: EC13 TS

Output Control Function
Blank = None (No Connection on Pin 1)
TS = Tri-State Enable High

Series Designator

Line 3: XX.XXX M

Frequency in MHz
(5 Digits Maximum + Decimal)

Line 4: XX Y ZZ

Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC13	14 pin DIP	3.3V	OS20	03/02