


EC28 Series

- HCMOS output
- 2.5V supply voltage
- 8 pin DIP package
- Stability to 20ppm
- Custom lead length, gull wing options available

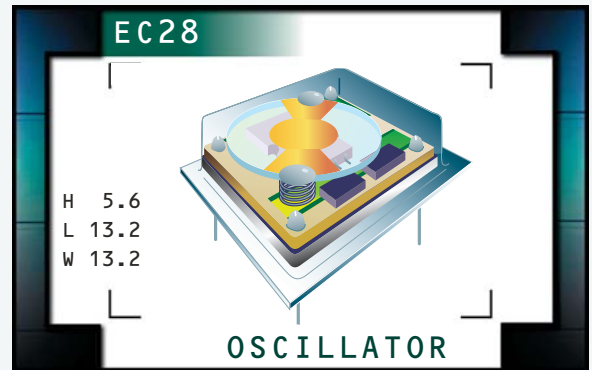

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range (F ₀)		1.544MHz to 50.000MHz
Operating Temperature Range (OTR)		±100ppm, ±50ppm, or ±25ppm ±20ppm
		0°C to 70°C or -40°C to 85°C 0°C to 70°C
Storage Temperature Range (STR)		-55°C to 125°C
Supply Voltage (V _{DD})		2.5V _{DC} ±10%
Input Current (I _{DD})		≤24.000MHz >24.000MHz
		10mA Maximum 20mA Maximum
Frequency Tolerance / Stability		Inclusive of Operating Temperature Range, Supply Voltage, and Load
		±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum (0°C to 70°C Only)
Output Voltage Logic High (V _{OH})		90% of V _{DD} Minimum I _{OH} =-4mA
Output Voltage Logic Low (V _{OL})		10% of V _{DD} Maximum I _{OL} =+4mA
Rise Time / Fall Time (T _R /T _F)		20% to 80% of Waveform ≤24.000MHz 20% to 80% of Waveform >24.000MHz
		6 nSeconds Maximum 4 nSeconds Maximum
Duty Cycle (SYM)		at 50% of Waveform
		50 ±10(%) (Standard) or 50 ±5(%) (Optional)
Load Drive Capability (C _{LOAD})		15pF HCMOS Load
Tri-State Input Voltage		V _{IH} :No Connection V _{IH} :≥90% of V _{DD} V _{IL} :≤10% of V _{DD}
		Enables Output Enables Output Disables Output: High Impedance
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time (T _S)		10mSeconds Maximum
Period Jitter: Absolute		±100pSeconds Maximum
Period Jitter: One Sigma		±25pSeconds Maximum

PART NUMBERING GUIDE

EC28 00 HS ET TS - 50.000M - G TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
45=±50ppm Maximum, 25=±25ppm Maximum
20=±20ppm Maximum

PACKAGE

HS=Half Size 8 Pin DIP

OPERATING TEMP. RANGE

Blank=0°C to 70°C (Standard), ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%) (Standard), T=50 ±5(%)

PACKAGING OPTIONS

TR= Tape & Reel (only offered with Half Size G and Half Size G2 Options)

AVAILABLE OPTIONS


Blank=None (Standard)
CLXX=Custom Lead Length (See Page 133)
G=Half Size Gull Wing (See Page 132)
G2=Half Size Gull Wing (See Page 132)

FREQUENCY

OUTPUT CONTROL FUNCTION

Blank=None (No Connection on Pin 1)
TS=Tri-State Enable High

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

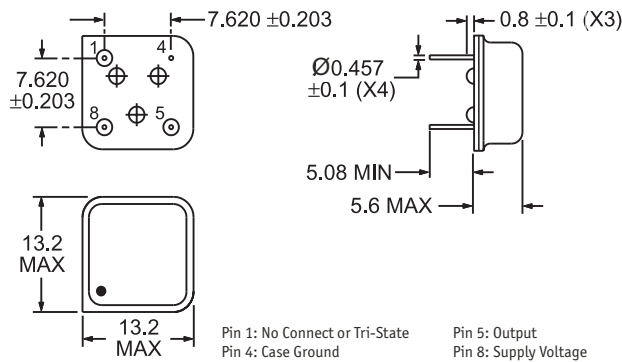

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: EC28 TS

Output Control Function
Blank = None (No Connection on Pin 1)
TS = Tri-State Enable High
Series Designator

Line 3: XX.XXX M


Frequency in MHz
(5 Digits Maximum + Decimal)

Line 4: XX Y ZZ

Week of Year
Last Digit of Year
Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

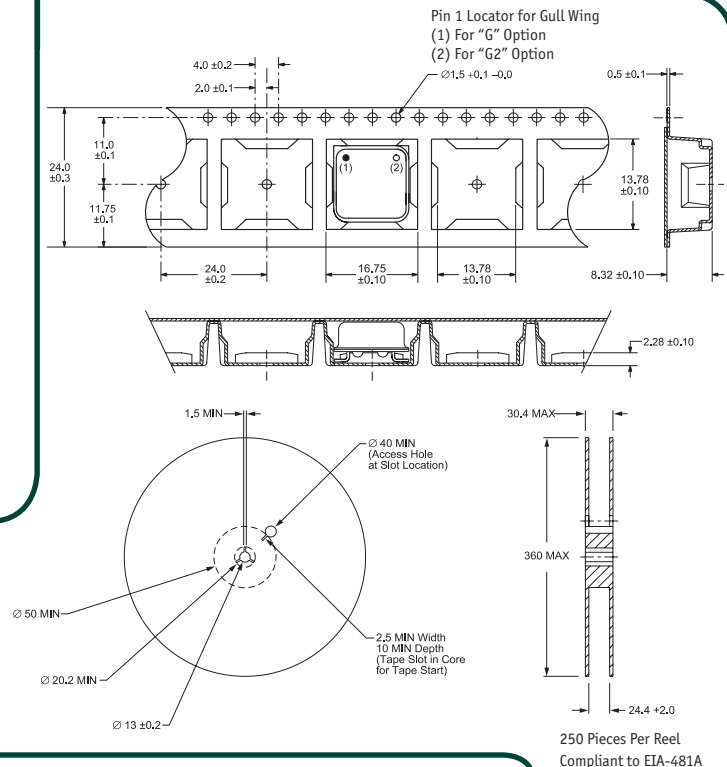

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

250 Pieces Per Reel
Compliant to EIA-481A

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC28	8 pin DIP	2.5V	OS54	03/02