


EC51 Series

- Temperature Compensated Crystal Oscillator (TCXO)
- HCMOS/TTL Output
- 5.0V Supply Voltage
- 14 pin DIP package
- Stability to 1.5ppm
- Internal or external voltage control option available

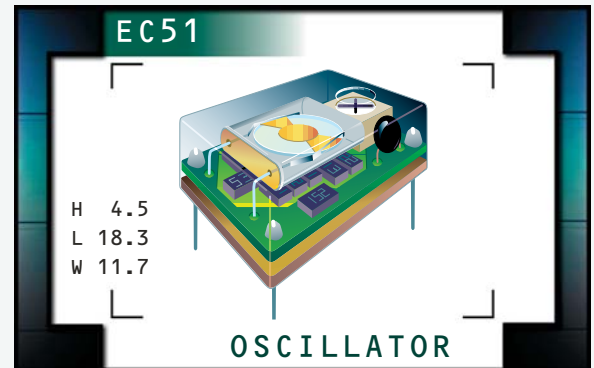

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		9.600MHz to 35.000MHz
Operating Temperature Range		See Table 1
Storage Temperature Range		-40°C to 85°C
Supply Voltage (V_{DD})		5.0V _{DC} ±5%
Load Drive Capability		10TTL Load or 15pF HCMOS Load Maximum
Internal Trim (Top of Can)		±3ppm Minimum
Control Voltage (External)		2.5V _{DC} ±2.0V _{DC} , Positive Transfer Characteristic
Frequency Deviation		±5ppm Minimum Over Control Voltage
Input Current		30mA Maximum
Aging (at 25°C)		±1ppm / year Maximum
Frequency Stability	vs. Operating Temperature Range	See Table 1
	vs. Input Voltage (±5%)	±0.3ppm Maximum
	vs. Load (±2pF)	±0.3ppm Maximum
Output Voltage Logic High (V_{OH})	w/TTL Load	2.4V _{DC} Minimum
	w/HCMOS Load	V_{DD} -0.5V _{DC} Minimum
Output Voltage Logic Low (V_{OL})	w/TTL Load	0.4V _{DC} Maximum
	w/HCMOS Load	0.5V _{DC} Maximum
Duty Cycle	at 1.4V _{DC} w/TTL Load; at 50% of Waveform w/HCMOS Load	50 ±10(%)
Rise Time / Fall Time	0.4V _{DC} to 2.4V _{DC} w/TTL Load; 20% to 80% of Waveform w/HCMOS Load	10 nSeconds Maximum

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EC51	PACKAGE 14 pin DIP	VOLTAGE 5.0V	CLASS OS24	REV. DATE 03/02
--------------------------------	------------------------	----------------	-----------------------	-----------------	---------------	--------------------

PART NUMBERING GUIDE

EC51 25 E V - 12.800M

FREQUENCY STABILITY
Two Digit Code Per Table 1

OPERATING TEMP. RANGE
One Letter Code Per Table 1

FREQUENCY

EXTERNAL TRIM
Blank=None (No Connection on Pin 1,
Pin 1 Not Present)
V=External Control Voltage




NOTES

TABLE 1: PART NUMBERING CODES

Operating Temperature Range	Code	Frequency Stability X Denotes Availability from 9.6MHz to 25MHz Y Denotes Availability for Frequencies above 25MHz					
		±1.5ppm	±2.0ppm	±2.5ppm	±3.0ppm	±3.5ppm	±5.0ppm
		15	20	25	30	35	50
0°C to +50°C	A	X, Y	X, Y	X, Y	X, Y	X, Y	X, Y
-10°C to +60°C	B	X, Y	X, Y	X, Y	X, Y	X, Y	X, Y
-20°C to +70°C	C	X	X, Y	X, Y	X, Y	X, Y	X, Y
-30°C to +60°C	D		X	X, Y	X, Y	X, Y	X, Y
-30°C to +75°C	E		X	X	X, Y	X, Y	X, Y
-35°C to +80°C	F			X	X	X, Y	X, Y
-40°C to +85°C	G				X	X	X, Y

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

Internal Trim Access
Hole $\varnothing 3.5 \pm 0.5$

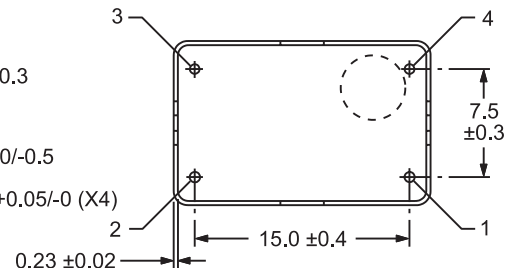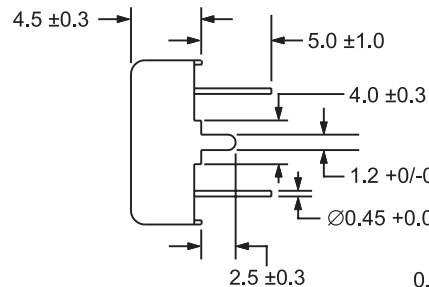

Pin 1: Voltage Control or No Connection
(Pin 1 Not present when Voltage Control is specified as "No Connect")
Pin 2: Case Ground
Pin 3: Output
Pin 4: Supply Voltage

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: EC51 15 A V

External Trim
Blank=None (No connection on Pin 1)
V=External Voltage Control

Operating Temperature Code (°C)
A= 0 to 50, B= -10 to 60, C= -20 to 70,
D= -30 to 60, E= -30 to 75, F= -35 to 80,
G= -40 to 85

Frequency Stability Code (±ppm)
15=1.5, 20=2.0, 25=2.5, 30=3.0, 35=3.5, 50=5.0

Series Designator

Line 3: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 4: XX Y ZZ

Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Parameter Specification

Seal Integrity	Bubble test in Perfluorocarbon at $+125^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 60 seconds minimum (internal crystal).
Solderability	Sn63 Solder dip at $+230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC51	14 pin DIP	5.0V	OS24	03/02