


EH13 Series

- HCMOS output
- 3.3V supply voltage
- 8 pin DIP package
- Stability to 20ppm
- Custom lead length, gull wing options available

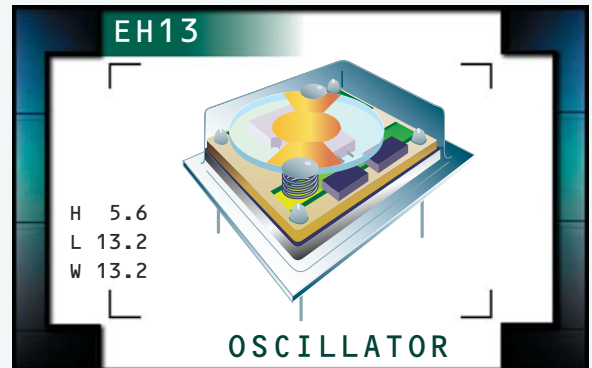

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		1.000MHz to 155.520MHz
Operating Temperature Range		0°C to 70°C or -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ±0.3V _{DC}
Input Current		35mA Maximum (Unloaded)
Frequency Tolerance / Stability	Inclusive of Operating Temperature Range, Supply Voltage, and Load	±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum (0°C to 70°C)
Output Voltage Logic High (V_{OH})		2.7V _{DC} Minimum I_{OH} = -8mA
Output Voltage Logic Low (V_{OL})		0.5V _{DC} Maximum I_{OL} = +8mA
Rise Time / Fall Time	≤70.000MHz 20% to 80% of Waveform w/HCMOS Load	6 nSeconds Maximum
	>70.000MHz 20% to 80% of Waveform w/HCMOS Load	4 nSeconds Maximum
Load Drive Capability	≤70.000MHz	30pF HCMOS Load Maximum
	>70.000MHz	15pF HCMOS Load Maximum
Duty Cycle (at V_{DD}=3.3V_{DC})		at 50% of Waveform 50 ±10(%) (Standard) or 50 ±5(%) (Optional)
Tri-State Input Voltage	V_{IH} : No Connection or ≥2.2V _{DC}	Enables Output
	V_{IL} : ≤0.8V _{DC}	Disables Output: High Impedance
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10mSeconds Maximum
Period Jitter: Absolute		±250pSec Maximum, ±100pSec Typical
Period Jitter: One Sigma		±50pSec Maximum, ±40pSec Typical

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EH13	PACKAGE 8 pin DIP	VOLTAGE 3.3V	CLASS OS45	REV. DATE 03/02
--------------------------------	------------------------	----------------	----------------------	-----------------	---------------	--------------------

PART NUMBERING GUIDE

EH13 00 HS ET TS - 70.000M - G TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
45=±50ppm Maximum, 25=±25ppm Maximum
20=±20ppm Maximum

PACKAGE

HS=Half Size 8 Pin DIP

OPERATING TEMP. RANGE

Blank=0°C to 70°C (Standard), ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%) (Standard), T=50 ±5(%)

PACKAGING OPTIONS

Blank=Bulk (Standard)
TR=Tape & Reel (only offered with
Half Size G and Half Size G2 Options)

AVAILABLE OPTIONS

Blank=None (Standard)
CLXXX=Custom Lead Length (See Page 133)
G=Half Size Gull Wing (See Page 132)
G2=Half Size Gull Wing (See Page 132)


FREQUENCY

OUTPUT CONTROL FUNCTION

TS=Tri-State Enable High

MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

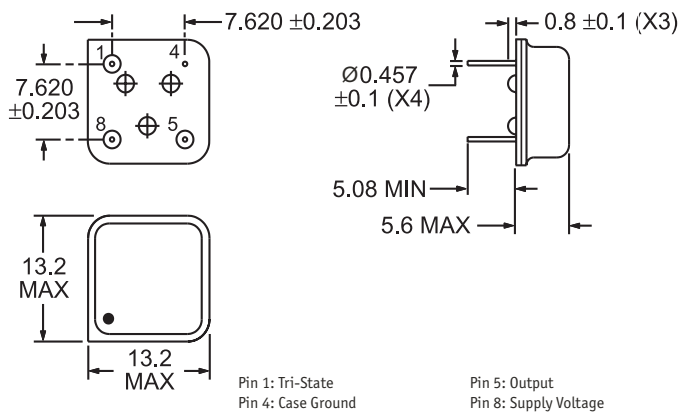

MARKING SPECIFICATIONS


Line 1: ECLIPTEK
Line 2: EH13 TS
Line 3: XX.XXX M
Line 4: XX YY ZZ

Series Designator
Frequency in MHz (5 Digits Maximum + Decimal)
Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

TAPE AND REEL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

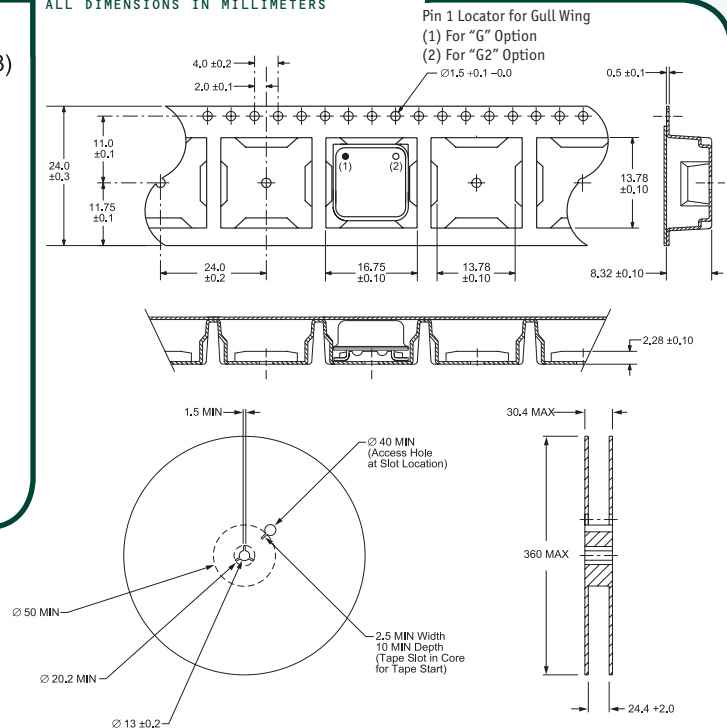

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EH13	8 pin DIP	3.3V	OS45	03/02