


EP25 Series

- EPO™ Programmable Oscillators
- 5.0V supply voltage
- HCMOS/TTL output
- Ceramic surface mount package
- Stability to 50ppm
- Available on tape and reel

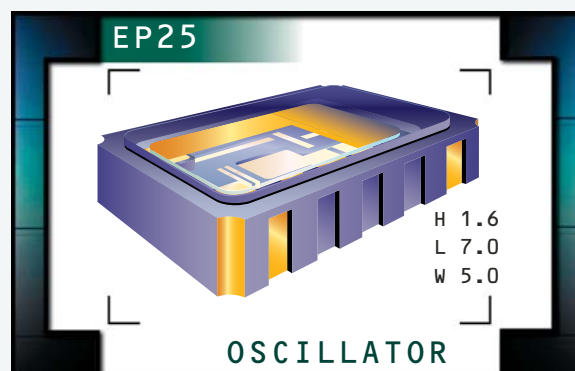

ELECTRICAL SPECIFICATIONS

Frequency Range		1.000MHz to 125.000MHz
Operating Temperature Range		-20°C to 70°C or -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		5.0V _{DC} ±10%
Input Current		45mA Maximum (Unloaded)
Disable Current (TS Option)		30mA Maximum (Pin 1=Ground)
Standby Current (PD Option)		50µA Maximum (Pin 1=Ground)
Frequency Tolerance / Stability	Inclusive of Operating Temp Range, Supply Voltage, and Load	±100ppm or ±50ppm Maximum
Output Voltage Logic High (V_{OH})	w/TTL Load	2.4V _{DC} Minimum $I_{OH}=-16mA$
	w/HCMOS Load	$V_{DD}-0.4V_{DC}$ Minimum $I_{OH}=-16mA$
Output Voltage Logic Low (V_{OL})	w/TTL Load or w/HCMOS Load	0.4V _{DC} Maximum $I_{OL}=+16mA$
Rise Time / Fall Time	w/TTL Load	4 nSeconds Max (0.8V _{DC} to 2.0V _{DC})
	w/HCMOS Load	4 nSec Max (20% to 80% of waveform)
Duty Cycle	at 1.4V _{DC} w/TTL Load; at 50% of waveform w/HCMOS Load	50 ±10(%) (Standard)
	at 1.4V _{DC} w/TTL Load (≤27.000MHz only), or	50 ±5(%) (Optional)
	at 50% of waveform w/HCMOS Load (≤50.000MHz Only)	
Load Drive Capability /	≤50.000MHz	50pF HCMOS Load Maximum
Output Type-HCMOS	>50.000MHz	15pF HCMOS Load Maximum
Load Drive Capability /	≤40.000MHz	10TTL Load Maximum
Output Type-TTL	>40.000MHz	5TTL Load Maximum
Output Control Function	TS	Tri-State
	PD	Power Down
Output Control Function Input Voltage	V_{IH} : No Connection or ≥2.0V _{DC}	Enables Output
	V_{IL} : (TS Option) ≤0.8V _{DC}	Disable Output: High Impedance
	V_{IL} : (PD Option) ≤0.8V _{DC}	Disable Output: Logic Low
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10 mSeconds Maximum
Period Jitter: Absolute	≤33.000MHz	±250pSec Max, ±100pSec Typical
	>33.000MHz	±100pSec Max, ±50pSec Typical
Period Jitter: One Sigma	≤33.000MHz	±50pSeconds Maximum
	>33.000MHz	±30pSeconds Maximum

PART NUMBERING GUIDE

EP25 00 ET TTS L - 24.000M TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Max (Standard), 45=±50ppm Maximum

OPERATING TEMP. RANGE

Blank=-20°C to 70°C (Standard)

ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%) (Standard), T=50 ±5(%)

OUTPUT CONTROL FUNCTION

TS=Tri-State, PD=Power Down

AVAILABLE OPTIONS

Blank=Bulk (Standard)

TR=Tape and Reel


FREQUENCY

OUTPUT TYPE

L=TTL, C=HCMOS


MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

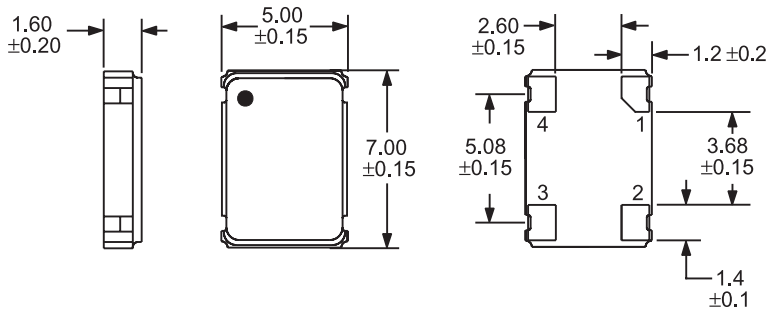


SUGGESTED SOLDER PAD LAYOUT

ALL DIMENSIONS IN MILLIMETERS

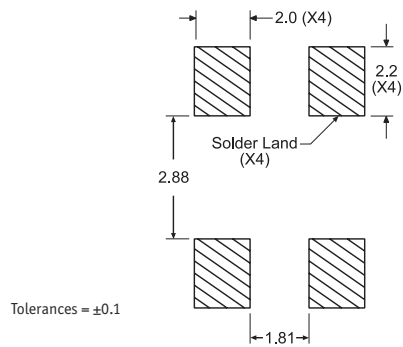


TAPE AND REEL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

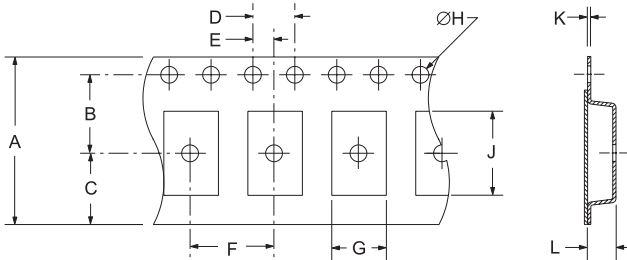

TAPE	A	B	C	D	E
	16+3-1	7.5±1	6.75±1	4 ±1	2±1
F	G	H	J	K	L
8±1	B0*	1.5 +1-0	A0*	.3 ±.05	K0*

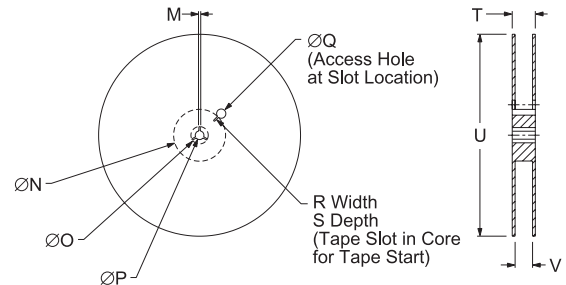

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4+2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 50cm.
Thermal Shock	300 Cycles from -55°C to +125°C, 5 minute dwell.

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year

Last Digit of Year

Ecliptek Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EP25	CERAMIC	5.0V	OS48	03/02