

Extruded Vertical T-1³/₄ (5mm)




- ◆ Stock Lengths .030" - .850" (1.0mm - 21.0mm)
- ◆ Available On Tape And Reel In .050" - .500" (2mm - 13mm) Lengths 1,000 Per Reel
- ◆ Additional Colors Available

94V-0
U.L. RATED
MATERIALS

For Technical Specifications See Pages 56-59.

ELM 1 SERIES
T-1³/₄ (5mm) Narrow Profile

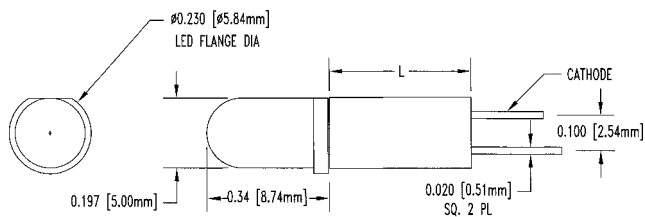


Profile 1

PART NO.	COLOR	PEAK (nm)	TYP VF	TYP IF	TYP mcd
ELM-X-XXX-5RD	RED	655	1.7	20mA	7.0
ELM-X-XXX-5GD	GREEN	565	2.1	20mA	15.0
ELM-X-XXX-5YD	YELLOW	585	2.2	20mA	18.0
ELM-X-XXX-5SRD	SUPER RED	660	1.8	20mA	50.0
ELM-X-XXX-5HD	HE RED	635	1.8	20mA	30.0
LOW CURRENT					
ELM-X-XXX-5HDL	HE RED	635	1.9	2mA	3.0
ELM-X-XXX-5GDL	GREEN	565	1.9	2mA	3.0
ELM-X-XXX-5YDL	YELLOW	585	1.9	2mA	3.0
5 VOLT					
ELM-X-XXX-5HD5V	HE RED	635	5.0	20mA	50.0
ELM-X-XXX-5GD5V	GREEN	565	5.0	20mA	25.0
ELM-X-XXX-5YD5V	YELLOW	585	5.0	20mA	20.0




ELM 3 SERIES
T-1³/₄ (5mm) Standard Profile

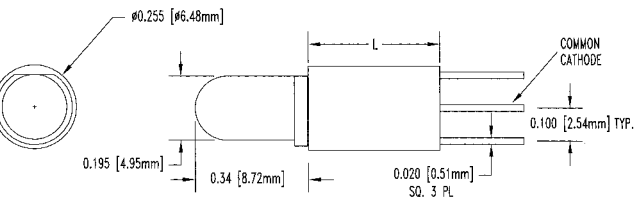

Profile 3

Shown with optional Tri-Lead device.

EXAMPLES:

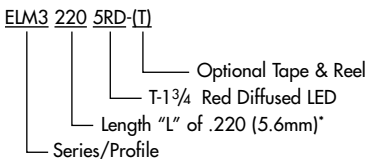

* Available lengths range from:
2 lead LEDs .030"-.850" (1.0mm-21.0mm)
3 lead LEDs .030"-.750" (1.0mm-19.0mm)
in .005"(.127mm) increments.

Note: Can be ordered with 3mm LEDs