



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDD-516-006 REV: 1

0.5" Dual Digit Displays

PART NO. : ELD-516EWB ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELD-516 series is a large 12.7 mm (0.5")high seven segment display designed for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light.
- These devices are made with white segments and black surface.

PART NO.	Chip	
	Material	Emitted Color
ELD-516EWB	GaAsP/GaP	Orange

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306


<http://www.everlight.com>

A0111039


0.5" Dual Digit Displays

PART NO. : ELD-516EWB ECN : _____ Page: 2/5

■ Package Dimensions:

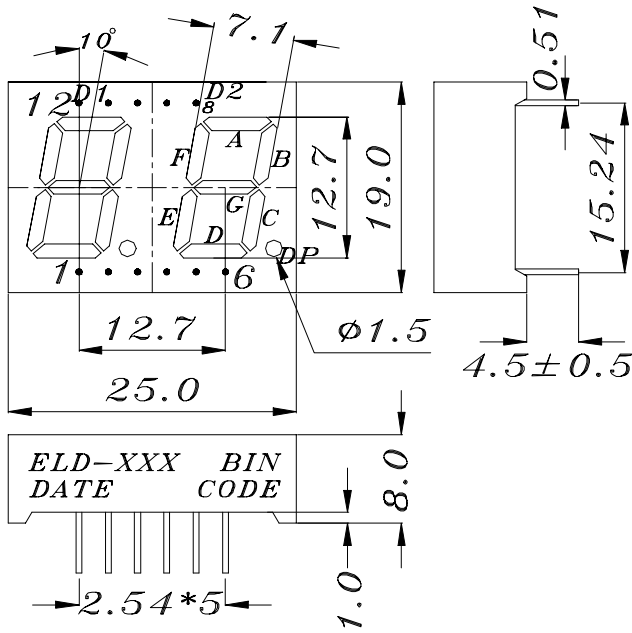

- COMMON ANODE**
- 1 CATHODE E
 - 2 CATHODE G
 - 3 COMMON ANODE DIG.1
 - 4 CATHODE DP1
 - 5 COMMON ANODE DIG.2
 - 6 CATHODE DP2
 - 7 NO PIN
 - 8 CATHODE A
 - 9 CATHODE D
 - 10 CATHODE B
 - 11 CATHODE C
 - 12 CATHODE F

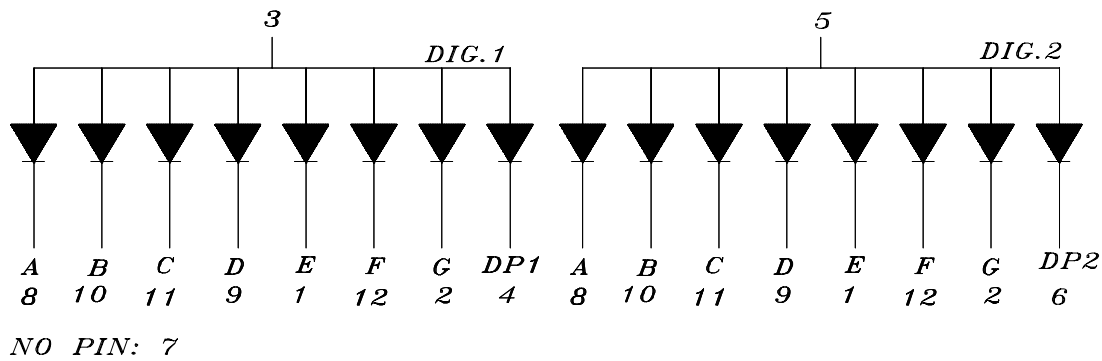

■ Notes:

1. All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
 2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



Device Number : CDDD-516-006 REV: 1

0.5" Dual Digit Displays

PART NO. : ELD-516EWB ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	IF(Peak)	160	mA

■ Electronic optical characteristics :

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Per segment	Iv	0.75	1.2	----	mcd	IF=10mA
	Per decimal point		0.3	0.6	----		
Peak Wavelength		λ p	----	635	----	nm	IF=20mA
Dominant Wavelength		λ d	----	625	----	nm	IF=20mA
Spectrum Radiation Bandwidth		△ λ	----	45	----	nm	IF=20mA
Forward Voltage		VF	1.7	2.0	2.4	V	IF=20mA
Reverse Current		IR	----	----	10	μ A	VR=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDD-516-006

REV: 1

0.5" Dual Digit Displays

PART NO. : ELD-516EWB

ECN :

Page: 4/5

■ Typical Electro-Optical Characteristic Curves:

CHIP Material:GaAsP/GaP
Emitted Color:Hi-Eff Red/Orange

Spectrum Distribution
 $T_a=25^\circ$

Wavelength λ_p (nm)	Relative luminous intensity (%)
550	0
600	25
630	100
650	75
700	25
750	0

Forward Current vs. Forward Voltage

FORWARD VOLTAGE (V_F) -volts	Forward Current I_f (mA)
1.2	0
1.6	0
2.0	10
2.4	50

Forward Current Derating Curve

AMBIENT TEMPERATURE T_a (°C)	Forward Current I_f (mA)
0	30
25	30
50	20
75	10
90	0



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDD-516-006 REV: 1

0.5" Dual Digit Displays

PART NO. : ELD-516EWB ECN : Page: 5/5

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	IF = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--