


- Design for Motorola MC 145574 Transceiver IC •
- Isolation: 2000 Vrms •
- Pending UL approval •


Electrical Parameters @ 25° C

Pri. OCL (mH Min.)	Leakage Inductance (uH Max)	Interwinding Capacitance (pF Max.)	DCR (Ω Max)	
100 KHz, 0.1 Vrms	@100 KHz, 1 Vrms	@100 KHz, .1 Vrms	Pri.	Sec.
20	10	135	3	5
Pins 1-4 & 5-8		Pri. to Sec.	Pins 1-4 & 5-8	

Schematic

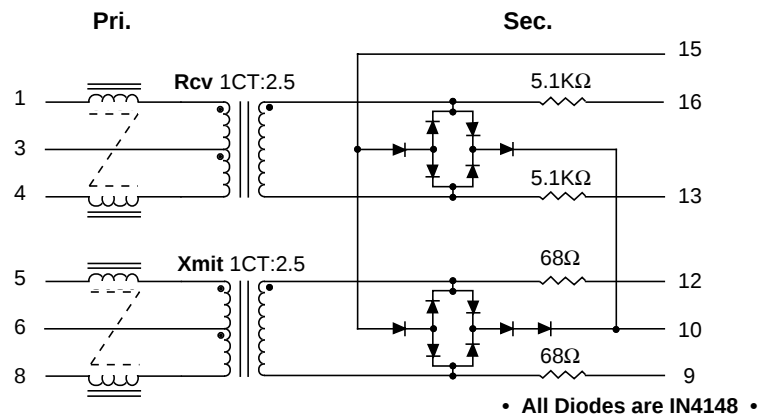

Package

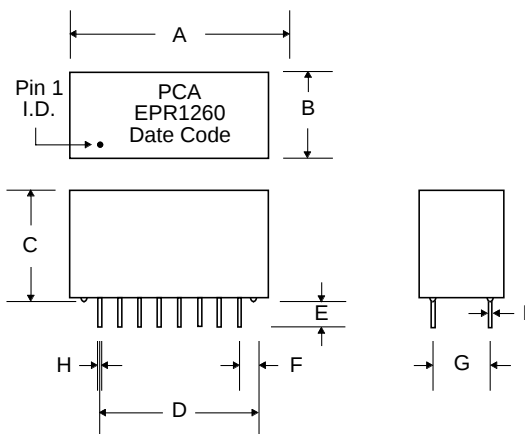

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.980	1.000	.990	24.89	25.4	25.15
B	.540	.560	.550	13.72	14.22	13.97
C	.470	.490	.480	11.94	12.45	12.19
D	---	---	.700	---	---	17.78
E	.120	.150	.135	3.05	3.81	3.43
F	---	---	.100	---	---	2.54
G	---	---	.400	---	---	10.16
H	.018	.022	.020	.457	.559	.508
I	.008	.012	.010	.203	.305	.254