

EPR1536SE




- Designed for Level One LXT 332 chip set •
- Robust construction allows IR/VP reflow processes •
- 1500 Vrms Isolation •
- Operating Temp. : -40°C to +85°C •

Electrical Parameters @ 25° C


Pri. OCL (mH Min.)	Leakage Inductance (μH Max.)	Interwinding Capacitance (pF Max.)	Return Loss (dB Min.)	Pri. DCR (Ω)	Turns Ratio (± 2%)	
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 1-5 MHz	XMIT & RCV	XMIT	RCV
	@ Pri. w/ Sec. shorted	Pri. to Sec.			(Pri : Sec)	
1.2	0.5	35	15	1	1: 2	1: 2CT

• Pri. OCL is 600 μH min. @ -40°C •

Schematic

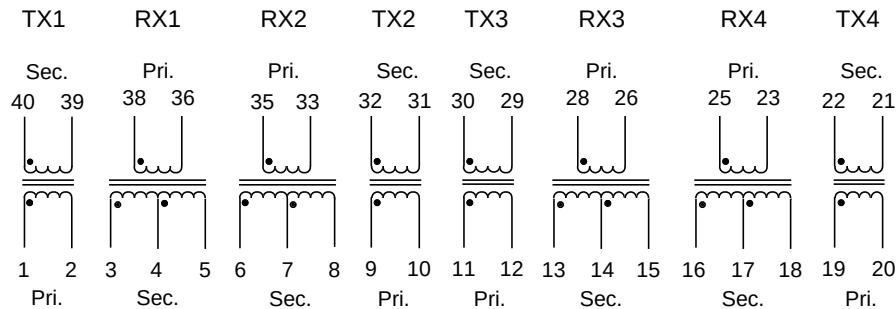

Package

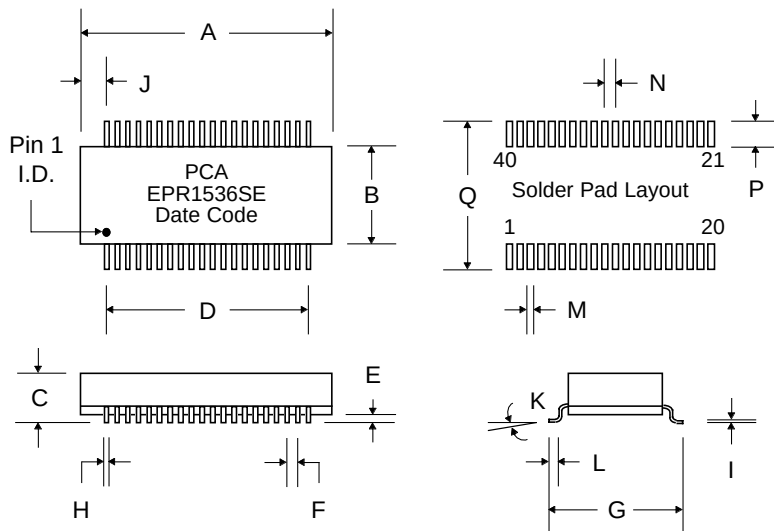

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	1.110	1.130	1.120	28.19	28.70	28.45
B	.470	.490	.480	11.94	12.45	12.19
C	.250	.270	.260	6.35	6.86	6.60
D	---	---	.950	---	---	24.13
E	.010	.015	.012	.254	.381	.305
F	---	---	.050	---	---	1.27
G	.590	.610	.600	14.99	15.49	15.24
H	.016	.022	.019	.406	.559	.483
I	.008	.012	.010	.203	.305	.254
J	---	---	.085	---	---	2.16
K	0°	8°	4°	0°	8°	4°
L	.025	.045	.035	.635	1.14	.889
M	---	---	.030	---	---	.762
N	---	---	.050	---	---	1.27
P	---	---	.090	---	---	2.29
Q	---	---	.670	---	---	17.02