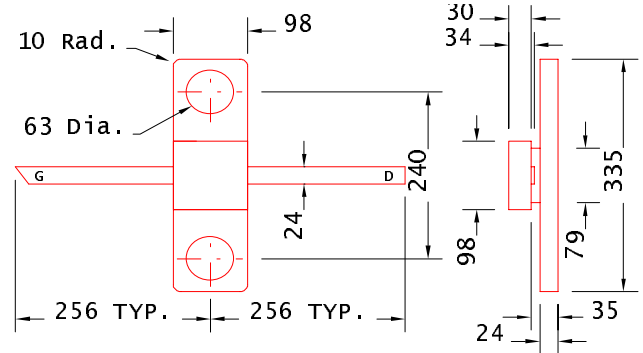


DATA SHEET
Low Distortion GaAs Power FET

- HERMETIC 100mil CERAMIC FLANGE PACKAGE
- +28.0dBm TYPICAL OUTPUT POWER
- 9.0dB TYPICAL POWER GAIN AT 8GHz
- 0.3 X 1200 MICRON RECESSED "MUSHROOM" GATE
- Si₃N₄ PASSIVATION
- ADVANCED EPITAXIAL DOPING PROFILE PROVIDES HIGH POWER EFFICIENCY, LINEARITY AND RELIABILITY


ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

All Dimensions In mils

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f = 8GHz f = 12GHz	26.0	28.0 28.0		dBm
G_{1dB}	Gain at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f = 8GHz f = 12GHz	4.0	9.0 6.0		dB
PAE	Gain at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f = 12GHz		30		%
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	200	340	440	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	140	180		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =3.0mA		-2.0	-3.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.2mA	-12	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.2mA	-7	-14		V
R_{th}	Thermal Resistance		43*		°C/W

*Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	12V	8V
V_{gs}	Gate-Source Voltage	-8V	-4V
I_{ds}	Drain Current	I _{dss}	315mA
I_{gsf}	Forward Gate Current	30mA	5mA
P_{in}	Input Power	26dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-65/175°C	-65/150°C
P_t	Total Power Dissipation	3.2W	2.7W

Note: 1. Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054
Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EFA120B-100F

DATA SHEET

Low Distortion GaAs Power FET

S-PARAMETERS

8V, 1/2 Idss

FREQ (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.960	-62.2	7.670	137.4	0.028	52.9	0.458	-46.5
2.0	0.884	-102.4	5.782	106.2	0.038	34.8	0.397	-69.5
3.0	0.841	-126.9	4.474	83.8	0.043	27.0	0.375	-85.2
4.0	0.812	-148.4	3.697	64.4	0.047	20.8	0.376	-97.4
5.0	0.790	-168.3	3.179	46.1	0.050	15.7	0.370	-107.9
6.0	0.774	178.5	2.801	29.3	0.054	10.8	0.342	-125.3
7.0	0.759	163.9	2.490	12.5	0.059	5.2	0.347	-144.3
8.0	0.746	149.9	2.220	-3.8	0.063	-0.7	0.371	-162.5
9.0	0.758	128.8	1.951	-20.5	0.068	-6.2	0.391	-166.2
10.0	0.777	114.8	1.754	-35.9	0.074	-14.2	0.383	-175.9
11.0	0.768	109.9	1.668	-51.1	0.086	-22.8	0.388	159.4
12.0	0.740	102.0	1.596	-66.9	0.099	-32.3	0.418	142.6
13.0	0.740	85.1	1.485	-82.4	0.114	-41.9	0.395	137.7
14.0	0.753	69.4	1.405	-98.6	0.132	-54.5	0.343	122.3
15.0	0.737	57.8	1.342	-117.8	0.156	-69.8	0.382	92.6
16.0	0.718	45.9	1.274	-136.3	0.187	-84.3	0.411	75.2
17.0	0.722	34.0	1.245	-152.8	0.232	-98.1	0.356	68.9
18.0	0.703	22.0	1.211	-171.5	0.295	-114.7	0.310	53.3
19.0	0.657	10.6	1.164	168.6	0.379	-134.5	0.319	39.7
20.0	0.717	-1.0	1.174	147.8	0.514	-158.6	0.270	39.6